


The Stra 5.0 is an RGBW version from the robust and powerful Stra family of in-grades uplights. With an IP69 rating (making them suitable for power washing) along with an optional IP68 housing, these fixtures are durable.

TECHNICAL DATA

Wattage / Input	39W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Alloy EN AB 47100 Trim: AISI 316L Stainless Steel Lens: Extra-clear Tempered Glass
CCT	RGBW (W = 4000K)
CRI	>80 (W)
BUG Rating	B2-U1-G0 (S, X) B2-U0-G0 (M) B1-U1-G0 (L, W) B1-U0-G0 (H)
Delivered Lumens	1216 lm: (R) 209 lm, (G) 380 lm, (B) 123 lm, (W) 504 lm (W, 4000K, 33°)
Efficacy	31 lm/W
Optics	6 Standard (see below)
Finishes	Micro-Blasted Stainless Steel
Fixture Dimensions	Ø11.42" x 5.43" h
Aperture	Ø7.13"
Fixture Weight	11.02 lbs
LED Source	4 RGBW Power LED groups
Lumen Maintenance	L85,B10>50,000hrs (Ta 25°C)
Color Consistency	-
Operating Temp.	-4°F to +113°F
IP Rating	IP69, IP68 with purpose-built outer casing
IK Rating	IK10



Fixture Dimensions

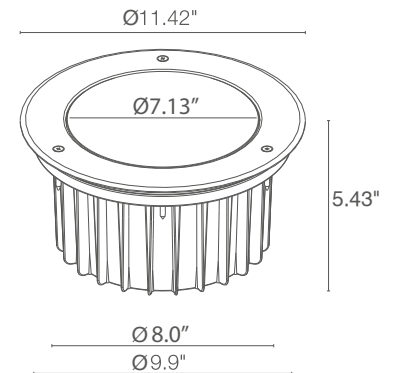

ORDERING INFORMATION

Example: CS50007MH. Accessories / Power Supply ordered separately.

CS1010	7		H
Model No.	CCT	Optics	Finish / Dimming
CS5000	7 - RGBW	S - 24° W - 32° x 61° M - 33° X - 66°x11° tiltable L - 60° H - Wall Washer	H - Stainless Steel

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00288	DMX / RDM (Field Addressable) / DALI / 0-10V	120-277VAC to 24VDC, 100W, Class 2	1-2

For other power supply options consult factory.

ACCESSORIES

Installation

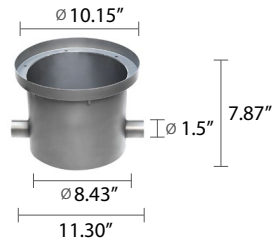

WC5611-US
Outer Casing
IP68



WE0202
Tamper-resistant
screw kit



WE0203
Screwdriver for tamper
resistant screws




WN7001
Pair of extractors
for outer casings



WE0201
Magnet for 66°x11° optics

ACCESSORIES

Anti-Glare



WH0610
Honeycomb Louvre
*Not available for 66°x11°
and wall washer optics*


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is CRI 80, 4000K


S - 24°

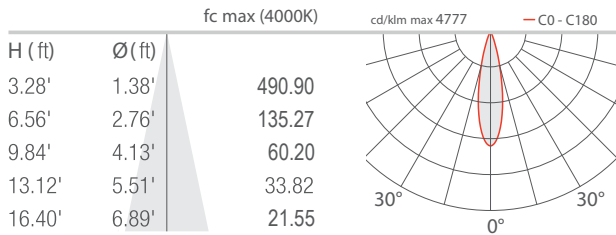


M - 33°

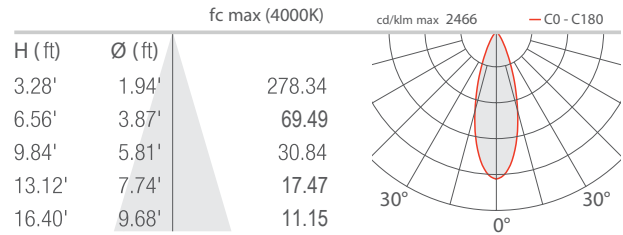


L - 60°

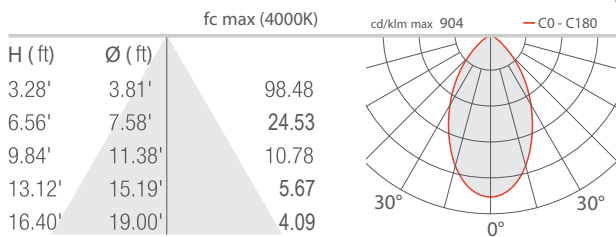


W - 32°x61°

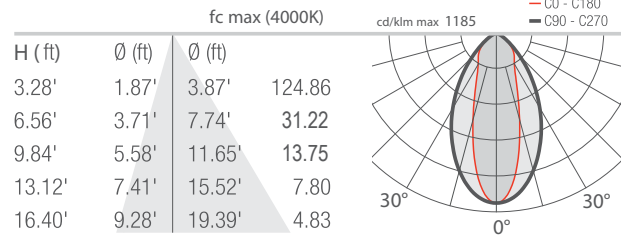

X - 66°x11° adjustable

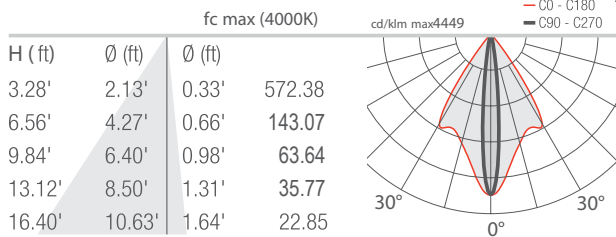

H - Wallwasher

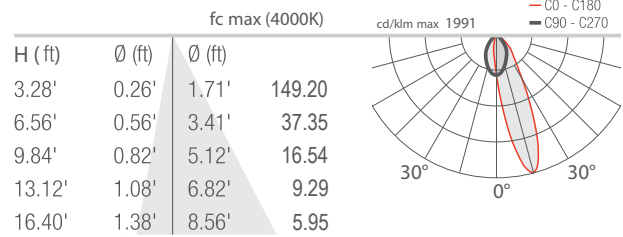

Job Name/Date:

Fixture Type Designation: