


Stra P 1.0 is a compact floodlight capable over 2000lm. With 6 standard optics, IP66, and either non-dim or 0-10V integral power supply, the Stra P 1.0 can be used in a wide variety of applications.



TECHNICAL DATA

Wattage / Input	37W (120VAC)
Power Supply	Integral
Construction	Body: Anti-corrosive aluminum alloy EN AB 47100 Trim: AISI 316L Stainless Steel Lens: Tempered, transparent extra-clear glass Cable Length: 4.92'
CCT	2700K, 3000K, 4000K <i>(3500K available, consult factory)</i>
CRI	CRI >80, CRI >90
Delivered Lumens	See Delivered Lumens Chart
Efficacy	55 lm/W (3000K, 30°, CRI 80) 44 lm/W (3000K, 30°, CRI 90)
Optics	6 Standard (see below)
Finish	Anthracite
Fixture Dimensions	Ø 9.92" x 5.43"
Fixture Weight	13.23 lbs
LED Source	4 High Intensity Power LEDs
Lumen Maintenance	L90,B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
Impact Rating	IK10

Fixture Dimensions



Delivered Lumens (3000K)	30°	66° x 11°
CRI 80	2024 lm	2205 lm
CRI 90	1619 lm	1764 lm

ORDERING INFORMATION

Example: PS10100FVH. Accessories ordered separately.

PS1010				
Model No.	CRI	CCT	Optics	Finish / Controls
PS1010	0 - 80 CRI 1 - 90 CRI	F - 2700K 5 - 3000K 9 - 4000K	V - 11° S - 14° M - 30° L - 37° W - 10° x 45° X - 66° x 11° adjustable	H - Anthracite/Non-Dim HR - Anthracite/0-10V Dim

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Installation




WN7100
Anti-fall kit



WE0201
Magnet for adjustable
optics

ACCESSORIES Anti-Glare



WH0610
Honeycomb Louvre
Not available for 66°x11°.


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80


V - 11° CRI 80

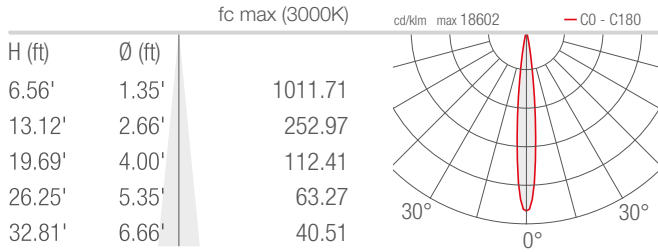


S - 14° CRI 80

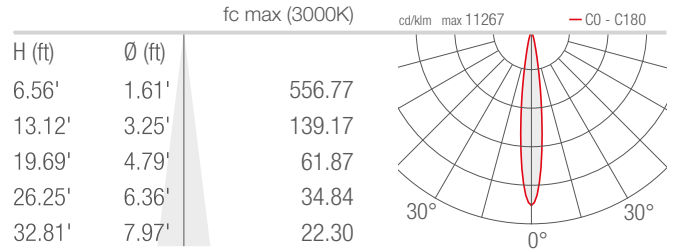


M - 30° CRI 80

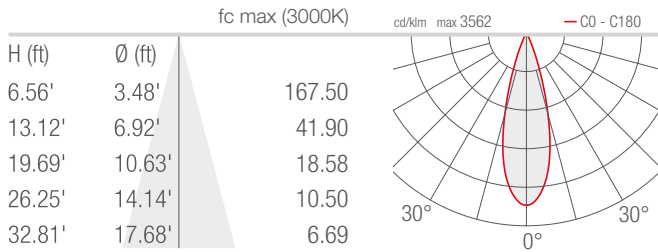


L - 37° CRI 80

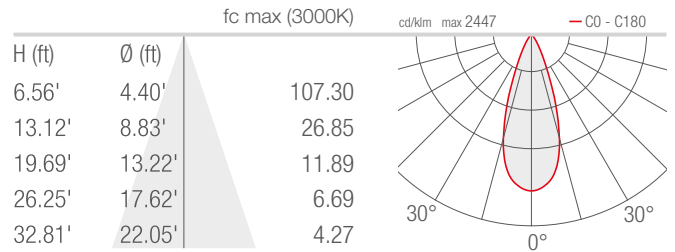

W - 10°x45° CRI 80

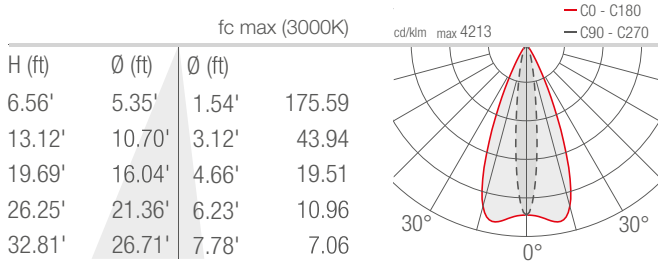

X - 66°x11° tiltable CRI 80

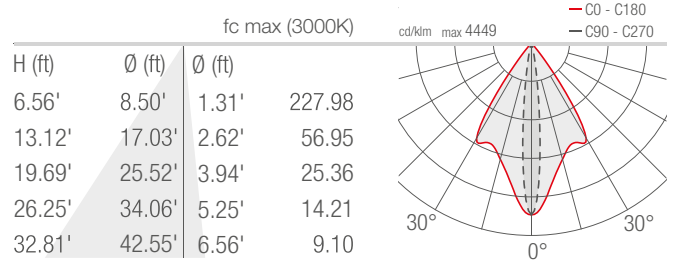

Job Name/Date:

Fixture Type Designation: