

# STRA P 5.0


Stra P 5.0 is a compact floodlight that combines RGB with White LED technology. With 6 standard optics and IP66 rating, the Stra P 5.0 is a versatile floodlight capable of a broad range of applications.



## TECHNICAL DATA

<b>Wattage / Input</b>	39W (24VDC)
<b>Power Supply</b>	Remote, not included. See Page 2.
<b>Construction</b>	Body: Anti-corrosive aluminum alloy EN AB 47100 Trim: AISI 316L Stainless Steel Lens: Tempered, transparent extra-clear glass Cable Length: 4.92'
<b>CCT</b>	RGBW (W = 4000K)
<b>CRI</b>	CRI >80
<b>BUG Rating</b>	B1-U1-G0 (60°, 32° x 61°, 61° x 32°) B2-U0-G0 (33°) B2-U1-G0 (24°, 66° x 11° adjustable)
<b>Delivered Lumens</b>	1216 lm: (R) 209 lm, (G) 380 lm, (B) 123 lm, (W) 504 lm (4000K, 33°)
<b>Efficacy</b>	31 lm/W (4000K, 33°)
<b>Optics</b>	6 Standard (see below)
<b>Finish</b>	Anthracite
<b>Fixture Dimensions</b>	Ø 9.92" x 5.43"
<b>Fixture Weight</b>	13.23 lbs
<b>LED Source</b>	4 RGBW Power LED groups
<b>Lumen Maintenance</b>	L90,B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK10

Fixture Dimensions

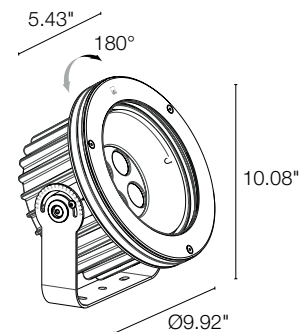

## ORDERING INFORMATION

Example: PS50007MH. Accessories / Power Supplies ordered separately.

PS5000			H
Model No.	CRI	Optics	Finish
PS5000	7 - RGBW	S - 24° M - 33° L - 60° W - 32° x 61° Z - 61° x 32° X - 66° x 11° adjustable	H - Anthracite

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00288</a>	DMX / RDM / DALI / 0-10V	120-277VAC to 24VDC, 100W, Class 2	1-2

For other power supply options consult factory.

## ACCESSORIES

### Installation




**WN7100**  
Anti-fall kit



**WE0201**  
Magnet for adjustable optics

## ACCESSORIES

### Anti-Glare



**WH0610**  
Honeycomb Louvre  
*Not available for 66°x11°.*


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 4000K, CRI 80


### S - 24°

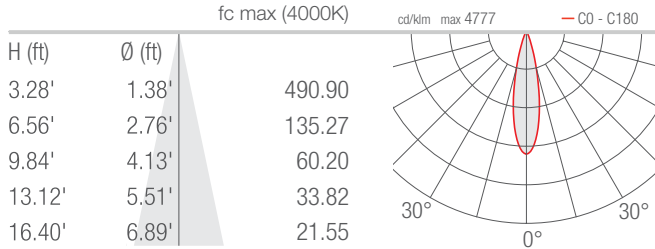


### M - 33°

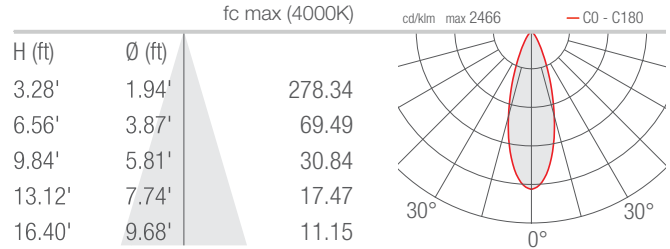


### L - 60°

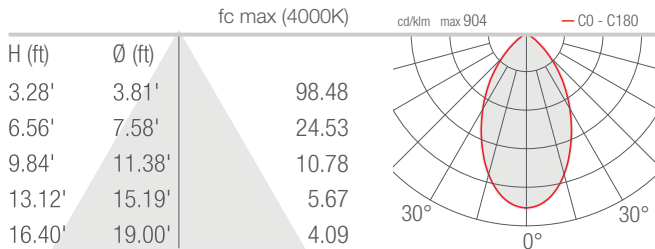


### W - 32°x61°

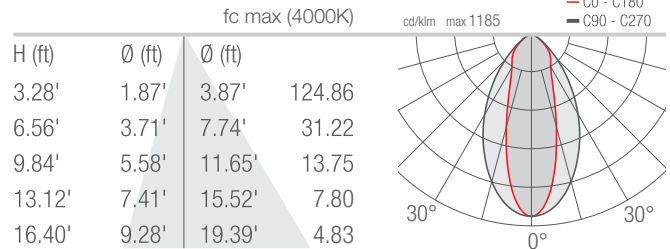

### Z - 61°x32°

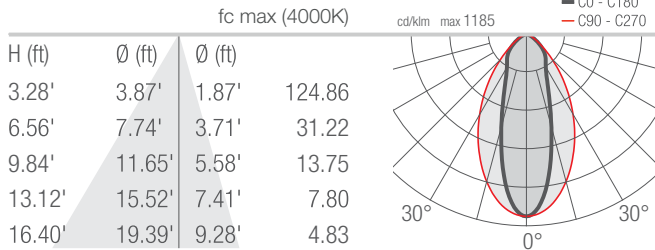

### X - 66°x11° adjustable

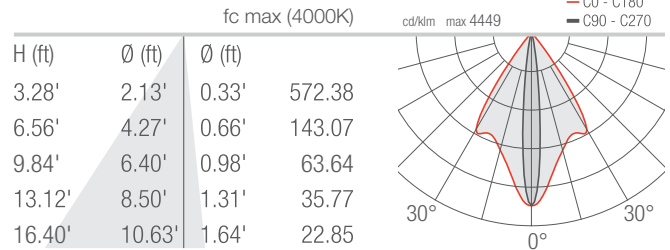

Job Name/Date:

Fixture Type Designation: