

STRIPP XL IP54

BATHROOM


Stripp XT IP54 is a recessed long and narrow fixture made of CALCYT® plaster that can be used as an up- or downlight and is equipped with state of the art LED technology. It is available in 5 color temperatures and can be directly installed in solid walls as well as in gypsum walls by means of an optional plasterkit.

TECHNICAL DATA

Wattage / Input	1W, 2W, 4W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster
CCT	2200K, 2700K, 3000K, 4000K, Royal Blue
CRI	>90, >80
Optics	Fixed
Finishes	CALCYT® Plaster - fully paintable
Fixture Dimensions	3.07" w x 21.46" h x 2.36" l
Cut-out Dimension	3.27" x 21.65"
Aperature	1.54" w x 16.34" h
Color Consistency	3-Step MacAdam
IP Rating	IP54



Ceiling Cut-Out: 3.27" x 21.65"
Fixture Dimensions

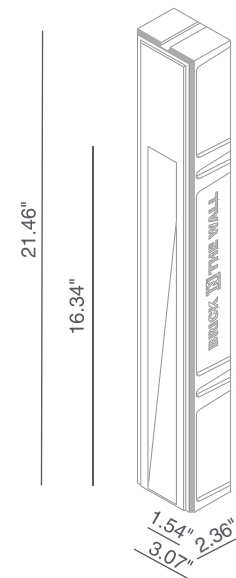

ORDERING INFORMATION

Example: 143 62 101. Accessories / Power Supplies ordered separately.

--

Model No.	Description
143 60 501 - 2200K	1W, 100 lm, CRI 80, IP54 Bathroom
143 60 001 - 2700K	1W, 100 lm, CRI 90, IP54 Bathroom
143 60 101 - 3000K	1W, 100 lm, CRI 90, IP54 Bathroom
143 60 201 - 4000K	1W, 100 lm, CRI 90, IP54 Bathroom
143 60 301 - royal blue	1W, 100 lm, CRI 90, IP54 Bathroom
143 62 501 - 2200K	2W, 200 lm, CRI 80, IP54 Bathroom
143 62 001 - 2700K	2W, 200 lm, CRI 90, IP54 Bathroom
143 62 101 - 3000K	2W, 200 lm, CRI 90, IP54 Bathroom
143 62 201 - 4000K	2W, 200 lm, CRI 90, IP54 Bathroom
143 62 301 - royal blue	2W, 200 lm, CRI 90, IP54 Bathroom
143 61 501 - 2200K	4W, 400 lm, CRI 80, IP54 Bathroom
143 61 001 - 2700K	4W, 400 lm, CRI 90, IP54 Bathroom
143 61 101 - 3000K	4W, 400 lm, CRI 90, IP54 Bathroom
143 61 201 - 4000K	4W, 400 lm, CRI 90, IP54 Bathroom
143 61 301 - royal blue	4W, 400 lm, CRI 90, IP54 Bathroom

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures		
			1W	2W	4W
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	3-9	2-6	1-3
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-16	1-9	1-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-16	1-9	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	2-17	1-10	1-5

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures		
						1W	2W	4W
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	4-5	2-3	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	6-11	3-6	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	12-16	6-9	3-4

For other power supply options consult factory.

ACCESSORIES - Installation

743 01 000

Outer Casing

Housing: perforated aluminum

Job Name/Date:

Fixture Type Designation: