



Supernova is a rounded recessed downlight made of AirCoral<sup>®</sup> that has a 2.4" rearward polycarbonate diffuser and a 25.0" diameter. It is available in 3000K as standard with a 120° optic.

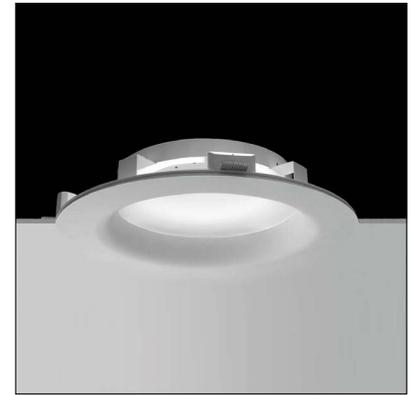

## TECHNICAL DATA

<b>Wattage / Input</b>	20W (700mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: AirCoral <sup>®</sup> Lens: Polycarbonate
<b>CCT</b>	3000K (4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1713 lm (3000K)
<b>Efficacy</b>	85.7 lm/W
<b>Optics</b>	120°
<b>Finishes</b>	AirCoral <sup>®</sup>
<b>Fixture Dimensions</b>	Ø23.62" x 7.09" h
<b>Cut-out Dimension</b>	Ø25.98"
<b>Aperature</b>	Ø15.75"
<b>Fixture Weight</b>	19.84 lbs
<b>IP Rating</b>	IP40

Fixture Dimensions

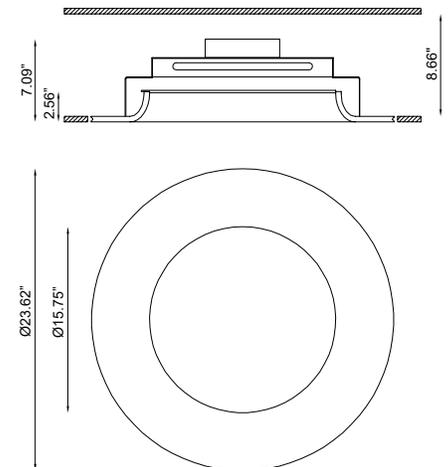

The body is made of Aircoral<sup>®</sup> a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral<sup>®</sup> calculator.

Additionally, Aircoral<sup>®</sup> is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

## ORDERING INFORMATION

Example: BU5133.30.AC.US. Power Supplies ordered separately.

BU5133		AC	US
<b>Model No.</b>	<b>CCT</b>	<b>Finish</b>	
BU5133	30 - 3000K (standard) 40 - 4000K (on request)	AC - AirCoral <sup>®</sup>	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00215</a>	0-10V Dimming to 10%	120-277VAC to 700mA, 30W, Class 2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2	1-1

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00517</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 27W, Class 2	1-1

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 642

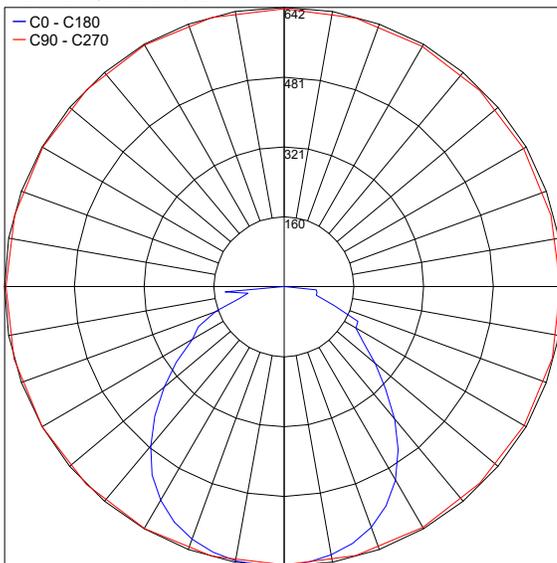

Job Name/Date:

Fixture Type Designation: