



Talon

LIGHT THE BOND BETWEEN SPACE AND INDIVIDUAL

Talon is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cataphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.


The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.


In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.



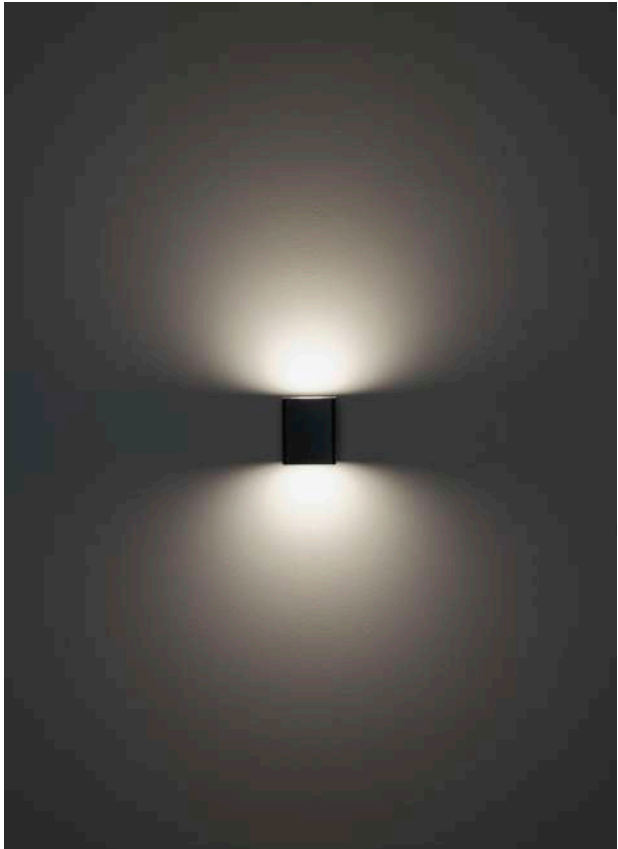

Talon Wall

monoemission



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / mid power led
120VAC
upon request
≥80
IP65
I
wall
transparent glass / sandblasted

Power
Led Color temp.

120VAC 8.2W led 10.7W total
4.8W led 5.8W total
2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K	120VAC	19°	756	901131032	901131033	901131034	901131035	901131038
8.2W led		32°	760	901131042	901131043	901131044	901131045	901131048
10.7W total		65°	722	901131052	901131053	901131054	901131055	901131058


2700K	120VAC	diffused	481	901131102	901131103	901131104	901131105	901131108
4.8W led								
5.8W total								

			lm	white	sand	graphite	aluminium	corten
3000K	120VAC	19°	796	901111032	901111033	901111034	901111035	901111038
8.2W led		32°	800	901111042	901111043	901111044	901111045	901111048
10.7W total		65°	760	901111052	901111053	901111054	901111055	901111058

3000K	120VAC	diffused	506	901111102	901111103	901111104	901111105	901111108
4.8W led								
5.8W total								

Talon Wall

biemission

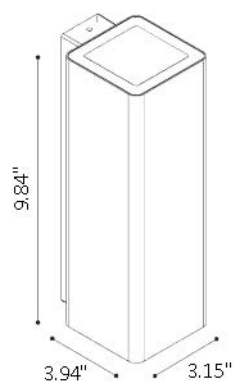

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
120VAC
upon request
≥80
IP65
I
wall transparent
glass

Power
Led Color temp.


120VAC 2x8.2W led 21.4W total
2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K	120VAC	19°	2x756	901131002	901131003	901131004	901131005	901131008
2x8.2W led		32°	2x760	901131012	901131013	901131014	901131015	901131018
2x10.7W total		65°	2x722	901131022	901131023	901131024	901131025	901131028
			lm	white	sand	graphite	aluminium	corten
3000K	120VAC	19°	2x796	901111002	901111003	901111004	901111005	901111008
2x8.2W led		32°	2x800	901111012	901111013	901111014	901111015	901111018
2x10.7W total		65°	2x760	901111022	901111023	901111024	901111025	901111028

Talon Wall

biemission h 3.94"



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
120VAC
upon request
≥80
IP65
I
wall
transparent glass
rectangular


Power
Led Color temp.

120VAC 2x4.8W led 11.6W total
2700K / 3000K



				lm	white	sand	graphite	aluminium	corten
2700K 2x4.8W led 2x5.8W total	120VAC	diffused		2x481	901131112	901131113	901131114	901131115	901131118
3000K 2x4.8W led 2x5.8W total	120VAC	diffused		2x506	901111112	901111113	901111114	901111115	901111118

Talon Roof




Available finishes:



Light Source power led / mid power led
Supply 120VAC
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application roof
Diffuser transparent glass / sandblasted

Power 120VAC 8.2W led 10.7W total
 4.8W led 5.8W total
Led Color temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K 8.2W led 10.7W total	120VAC	19°	756	901131122	901131123	901131124	901131125	901131128
		32°	760	901131132	901131133	901131134	901131135	901131138
		65°	722	901131142	901131143	901131144	901131145	901131148

2700K 4.8W led 5.8W total	120VAC	diffused	481	901131152	901131153	901131154	901131155	901131158
---------------------------------	--------	----------	-----	-----------	-----------	-----------	-----------	-----------

			lm	white	sand	graphite	aluminium	corten
3000K 8.2W led 10.7W total	120VAC	19°	796	901111122	901111123	901111124	901111125	901111128
		32°	800	901111132	901111133	901111134	901111135	901111138
		65°	760	901111142	901111143	901111144	901111145	901111148

3000K 4.8W led 5.8W total	120VAC	diffused	506	901111152	901111153	901111154	901111155	901111158
---------------------------------	--------	----------	-----	-----------	-----------	-----------	-----------	-----------

Talon Recessed



Available finishes:



white

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / mid power led
120VAC
upon request
≥80
IP65
II
ceiling
transparent glass / sandblasted

Power

120VAC 8.2W led 10.7W total
4.8W led 5.8W total

Led Color temp.

2700K / 3000K




			lm	white
2700K	120VAC	19°	756	901131162
8.2W led		32°	760	901131172
10.7W total		65°	722	901131182

2700K	120VAC	diffused	481	901131192
4.8W led				
5.8W total				

			lm	white
3000K	120VAC	19°	796	901111162
8.2W led		32°	800	901111172
10.7W total		65°	760	901111182

3000K	120VAC	diffused	506	901111192
4.8W led				
5.8W total				

ACCESSORIES



Metal box for concrete installation
10.31" x 10.43" x 4.92"

code **9078**



ACCESSORIES:

code **9078**