

TAGO



designplan™ 


Luce & Light

TAGO DESIGNED TO BRING FACADES TO LIFE

PROFILI LINEARI DA ESTERNO / OUTDOOR LINEAR PROFILES



designplanTM 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



^
TAGO 2.0
3000K, 14W, 29°
with honeycomb louver

TAGO



Tago is designed to provide architectural lighting for urban facades such as historic and public buildings, hotels and residential exteriors.

TAGO

MATERIALS

- ① TEMPERED EXTRA-CLEAR GLASS, UP TO 0.39" THICK, WITH GREY-VITRIFIED SERIGRAPHY, HIGH-TRANSMITTANCE TO ENSURE CHROMATIC HOMOGENEITY, AND EXCELLENT RESISTANCE TO KNOCKS AND SCRATCHES



- ② BODY MADE OF ANTICORODAL LOW-COPPER-CONTENT ALUMINUM EN AW 6060 T5 FOR EXCELLENT HEAT DISSIPATION, MANUFACTURED FROM AN EXTRUDED PROFILE AND SUBSEQUENTLY SUBJECTED TO A DEEP BLACK ELECTROCOLORING PROCESS OR PAINTED BLACK FOR EXCELLENT RESISTANCE TO CORROSION

- ③ TAGO 1 / 2 / 3
ANTI-GLARE RECESSED OPTICS TO ENSURE VISUAL COMFORT



IN/OUT CONNECTION

Easy wiring with quick connectors designed to connect the profiles in a line in the dimmable versions.



BUILT-IN PROTECTION SYSTEMS:
IPS INTELLIGENT PROTECTION SYSTEM
PID PROTECTIVE IMPEDANCE DEVICE



TAGO 1 / 2 / 3
AVAILABLE IN 0-10V DIMMABLE VERSIONS



SUITABLE FOR OUTDOOR APPLICATIONS




TAGO 4 / 5 / 6
LIGHTING CONTROLLED USING THE DMX512+RDM PROTOCOL



TAGO 1 / 2 / 4 / 5
DRIVE-OVER UP TO 4409 lbs



TAGO 1 / 4
RECESSED WITH REBATED FRAME




TAGO 2 / 5
RECESSED FLUSH, WITHOUT FRAME



TAGO 3 / 6
SURFACE MOUNTED WITH BRACKET

TAGO

ADJUSTABILITY



TAGO 1 / 2
TILTING SYSTEM INSIDE THE OPTICAL UNIT. THE LIGHT DIRECTION CAN BE ALTERED BY +/- 20° EXTERNALLY WITH A SIMPLE ADJUSTMENT ON THE END CAPS, WITHOUT COMPROMISING THE FIXTURE'S IP65 AND IP67 PROTECTION LEVELS




TAGO 1 / 2 / 3
ANTI-GLARE ACCESSORIES. THE HONEYCOMB LOUVRE OR ANTI-GLARE SHIELD, WHICH CAN BE ORDERED AT THE SAME TIME AS THE FIXTURE, IS MOUNTED ON THE OPTICAL UNIT, SO THAT THE CHOSEN OPTION TILTS TOGETHER WITH THE OPTICS IN THE RECESSED VERSION



TAGO 3 / 6
THE BRACKET WITH TWO PIVOT POINTS ALLOWS THE LIGHT OUTPUT TO BE PRECISELY DIRECTED

TAGO


OPTICS

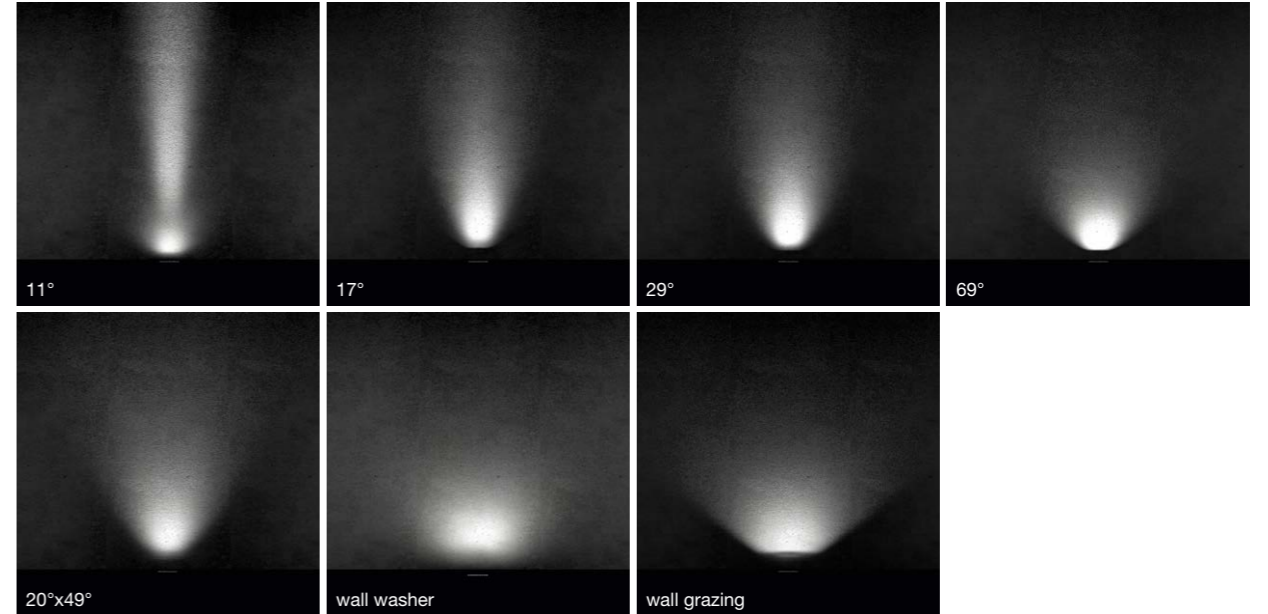

TAGO 1.0
PROFILE CENTRE DISTANCE FROM WALL, WALL WASHER OPTICS: 19.7", OTHER OPTICS: 7.9"

TAGO

TONES OF LIGHT

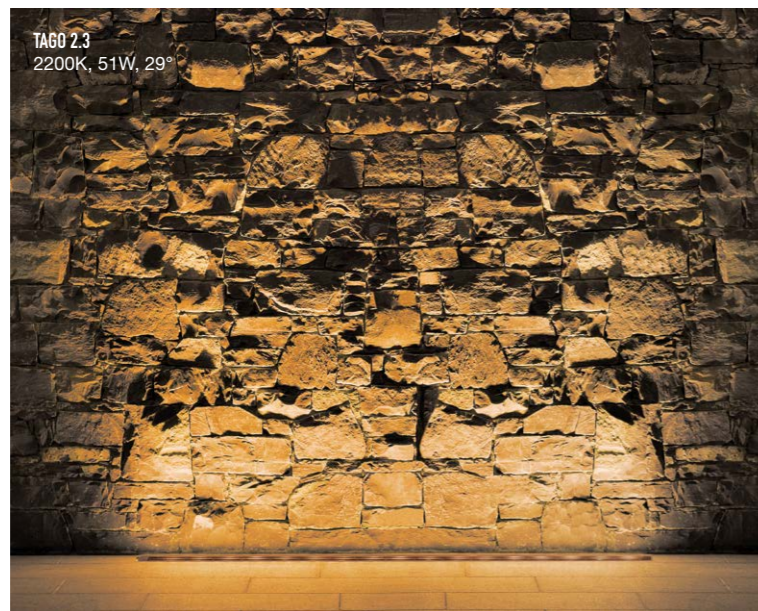


TAGO IS AVAILABLE WITH A 2200K WARM WHITE LIGHT.
THE USE OF WARM LIGHT SOURCES IN URBAN AND PUBLIC SETTINGS
RESPECTS THE CIRCADIAN CYCLES OF PEOPLE AND ANIMALS: EMISSIONS WITH
LONG WAVELENGTHS ARE COMPARABLE TO THE NATURAL LIGHT AT SUNSET.




VERSIONE RGBW >
RGBW VERSION

TAGO

PROFILI LINEARI DA ESTERNO / OUTDOOR LINEAR PROFILES



RECESSED, WITH REBATED FRAME



TAGO 1.0
14W
ON/OFF, 0-10V
12.7"



TAGO 1.1
24W
ON/OFF, 0-10V
22.5"



TAGO 1.3
51W
ON/OFF, 0-10V
42.2"



TAGO 4.0
14W 48VDC
DMX512, RDM
12.7"




TAGO 4.1
24W 48VDC
DMX512, RDM
22.5"



TAGO 4.3
49W 48VDC
DMX512, RDM
42.2"

RECESSED FLUSH, WITHOUT FRAME



TAGO 2.0
14W
ON/OFF, 0-10V
11.0"



TAGO 2.1
24W
ON/OFF, 0-10V
20.8"



TAGO 2.3
51W
ON/OFF, 0-10V
40.5"



TAGO 5.0
14W 48VDC
DMX512, RDM
11.0"



TAGO 5.1
24W 48VDC
DMX512, RDM
22.5"



TAGO 5.3
49W 48VDC
DMX512, RDM
40.5"

SURFACE MOUNTED, WITH BRACKETS



TAGO 3.0
14W
ON/OFF, 0-10V
11.3"



TAGO 3.1
24W
ON/OFF, 0-10V
21.1"



TAGO 3.3
51W
ON/OFF, 0-10V
40.8"



TAGO 6.0
14W 48VDC
DMX512, RDM
11.3"



TAGO 6.1
24W 48VDC
DMX512, RDM
21.1"



TAGO 6.3
49W 48VDC
DMX512, RDM
40.8"

On/off version: 1 cable gland
 DALI, 0-10V version:
 3 cable glands, 2 connectors



LED TECH 2.92 lbs 4409 lbs IK09 IP65 IP67
 IPS PID T_{max} 104°F 0-10V

POWER / POWER SUPPLY	14W 12.68" LED spacing 0.79"
CODE	TG10100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
CONTROL SYSTEM	0 - on/off 2 - 0-10V
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	1492 lm (3000K)
DELIVERED LUMEN OUTPUT	932 lm (3000K, 29°)
NO. AND TYPE OF LED	12 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 4.64 lbs 4409 lbs IK09 IP65 IP67
 IPS PID T_{max} 104°F 0-10V

POWER / POWER SUPPLY	24W 22.52" LED spacing 0.79"
CODE	TG11100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
CONTROL SYSTEM	0 - on/off 2 - 0-10V
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	2984 lm (3000K)
DELIVERED LUMEN OUTPUT	1864 lm (3000K, 29°)
NO. AND TYPE OF LED	24 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 9.00 lbs 4409 lbs IK09 IP65 IP67
 IPS PID T_{max} 104°F 0-10V

POWER / POWER SUPPLY	51W 42.20" LED spacing 0.79"
CODE	TG13100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
CONTROL SYSTEM	0 - on/off 2 - 0-10V
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	5968 lm (3000K)
DELIVERED LUMEN OUTPUT	3728 lm (3000K, 29°)
NO. AND TYPE OF LED	48 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

On/off version: 1 cable gland
DALI, 0/1-10V version:
3 cable glands, 2 connectors



LED TECH 2.56 lbs 4409 lbs IK09 IP65 IP67
IPS PID T max 104°F 0-10V

POWER / POWER SUPPLY	14W 10.98" LED spacing 0.79"
CODE	TG20100 ■ 0 ■ 0 ■ 0 ■ V
CONTROL SYSTEM	0 - on/off 2 - 0-10V
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	1492 lm (3000K)
DELIVERED LUMEN OUTPUT	932 lm (3000K, 29°)
NO. AND TYPE OF LED	12 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)




LED TECH 4.07 lbs 4409 lbs IK09 IP65 IP67
IPS PID T max 104°F 0-10V

POWER / POWER SUPPLY	24W 20.83" LED spacing 0.79"
CODE	TG21100 ■ 0 ■ 0 ■ 0 ■ V
CONTROL SYSTEM	0 - on/off 2 - 0-10V
OPTICAL ACCESSORIES	0 - none 1 -honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	2984 lm (3000K)
DELIVERED LUMEN OUTPUT	1864 lm (3000K, 29°)
NO. AND TYPE OF LED	24 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 8.06 lbs 4409 lbs IK09 IP65 IP67
IPS PID T max 104°F 0-10V

POWER / POWER SUPPLY	51W 40.51" LED spacing 0.79"
CODE	TG23100 ■ 0 ■ 0 ■ 0 ■ V
CONTROL SYSTEM	0 - on/off 2 - 0-10V
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	5968 lm (3000K)
DELIVERED LUMEN OUTPUT	3728 lm (3000K, 29°)
NO. AND TYPE OF LED	48 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



Optics 20°x49°

On/off version: 1 cable gland
DALI, 0/1-10V version:
3 cable glands, 2 connectors



LED TECH 2.39 lbs IK09 IP65 IP67 0-10V
IPS PID

POWER / POWER SUPPLY	14W 11.26" LED spacing 0.79"
CODE	TG30100 ■ 0 ■ ■ 0 ■ N Black

CONTROL SYSTEMS	0 - on/off 2 - 0-10V
------------------------	-------------------------

OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
----------------------------	--

LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
------------------	--

OPTICS	S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer
---------------	--

LUMEN OUTPUT AT SOURCE	1492 lm (3000K)
-------------------------------	-----------------

DELIVERED LUMEN OUTPUT	932 lm (3000K, 29°)
-------------------------------	---------------------

NO. AND TYPE OF LED	12 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)
----------------------------	--



LED TECH 4.15 lbs IK09 IP65 IP67 0-10V
IPS PID

POWER / POWER SUPPLY	24W 21.10" LED spacing 0.79"
CODE	TG31100 ■ 0 ■ ■ 0 ■ N Black

CONTROL SYSTEMS	0 - on/off 2 - 0-10V
------------------------	-------------------------

OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
----------------------------	--

LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
------------------	--

OPTICS	S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer
---------------	--

LUMEN OUTPUT AT SOURCE	2984 lm (3000K)
-------------------------------	-----------------

DELIVERED LUMEN OUTPUT	1864 lm (3000K, 29°)
-------------------------------	----------------------

NO. AND TYPE OF LED	24 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)
----------------------------	--



LED TECH 7.94 lbs IK09 IP65 IP67 0-10V
IPS PID

POWER / POWER SUPPLY	51W 40.79" LED spacing 0.79"
CODE	TG33100 ■ 0 ■ ■ 0 ■ N Black

CONTROL SYSTEMS	0 - on/off 2 - 0-10V
------------------------	-------------------------

OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
----------------------------	--

LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
------------------	--


OPTICS	S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer
---------------	--

LUMEN OUTPUT AT SOURCE	5968 lm (3000K)
-------------------------------	-----------------

DELIVERED LUMEN OUTPUT	3728 lm (3000K, 29°)
-------------------------------	----------------------

NO. AND TYPE OF LED	48 SMD LED, LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)
----------------------------	--

TAGO 4.0

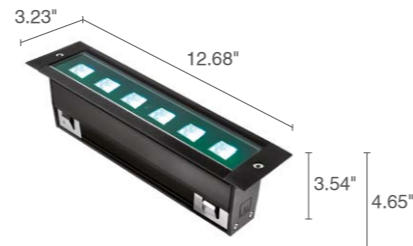

3 cable glands, 2 connectors



IK09 IP65 IP67 DMX512 RDM



POWER / POWER SUPPLY	14W 48VDC 12.68" LED spacing 1.64"
CODE	TG4030040070 ■ N Anodized black

OPTICS	S - 24° M - 30° L - 52°
---------------	--

LED COLOR	RGBW
------------------	------

LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
-------------------------------	--


DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
-------------------------------	--

NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)
----------------------------	--

TAGO 4.1



3 cable glands, 2 connectors



IK09 IP65 IP67 DMX512 RDM



POWER / POWER SUPPLY	24W 48VDC 22.52" LED spacing 1.64"
CODE	TG4130040070 ■ N Anodized black

POWER / POWER SUPPLY	29W Integral? 22.52" LED spacing 1.64"
CODE	TG4110040070 ■ N Anodized black

OPTICS	S - 24° M - 30° L - 52°
---------------	--


LED COLOR	RGBW
------------------	------

LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
-------------------------------	--


DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
-------------------------------	--

NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)
----------------------------	--

TAGO 4.3

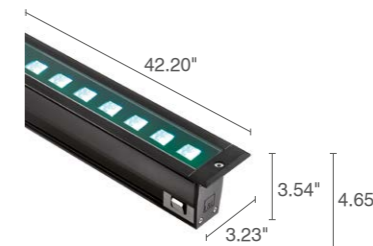

3 cable glands, 2 connectors



IK09 IP65 IP67 DMX512 RDM



POWER / POWER SUPPLY	49W 48VDC 42.20" LED spacing 1.64"
CODE	TG4330040070 ■ N Anodized black

POWER / POWER SUPPLY	55W Integral 1072 mm LED spacing 1.64"
CODE	TG4310040070 ■ N Anodized black

OPTICS	S - 24° M - 30° L - 52°
---------------	--

LED COLOR	RGBW
------------------	------

LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
-------------------------------	--


DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
-------------------------------	---

NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)
----------------------------	--

TAGO 5.0



3 cable glands, 2 connectors



POWER / POWER SUPPLY	14W 48VDC 10.98" LED spacing 1.64"
CODE	TG5030040070 ■ V

OPTICS	S - 24° M - 30° L - 52°
---------------	--


LED COLOR	RGBW
------------------	------

LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
-------------------------------	--


DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
-------------------------------	--

NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)
----------------------------	--

TAGO 5.1

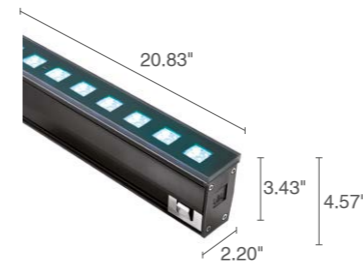

3 cable glands, 2 connectors



POWER / POWER SUPPLY	24W 48VDC 20.83" LED spacing 1.64"
CODE	TG5130040070 ■ V

29W Integral 20.83" LED spacing 1.64"
TG5110040070 ■ V

OPTICS	S - 24° M - 30° L - 52°
---------------	--


LED COLOR	RGBW
------------------	------

LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
-------------------------------	--

DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
-------------------------------	--

NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)
----------------------------	--

TAGO 5.3

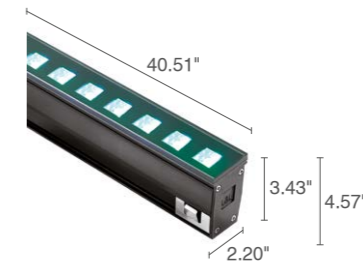

3 cable glands, 2 connectors



POWER / POWER SUPPLY	49W 48VDC 40.51" LED spacing 1.64"
CODE	TG5330040070 ■ V

55W Integral 40.51" LED spacing 1.64"
TG5310040070 ■ V

OPTICS	S - 24° M - 30° L - 52°
---------------	--


LED COLOR	RGBW
------------------	------

LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
-------------------------------	--

DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
-------------------------------	---

NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)
----------------------------	--

TAGO 6.0




3 cable glands, 2 connectors

5.29 lbs
 IK09 IP65 IP67 DMX512 RDM

POWER / POWER SUPPLY	14W 48VDC 11.26" LED spacing 1.64"
CODE	TG6030040070 ■ N Black
OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 6.1




3 cable glands, 2 connectors

7.94 lbs Integral
 8.38 lbs 48VDC
 IK09 IP65 IP67 DMX512 RDM

POWER / POWER SUPPLY	24W 48VDC 21.10" LED spacing 1.64"
CODE	TG6130040070 ■ N Black
OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 6.3

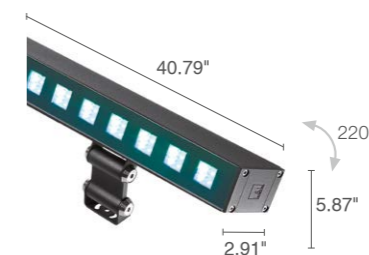

3 cable glands, 2 connectors

12.35 lbs Integral
 11.90 lbs 48VDC
 IK09 IP65 IP67 DMX512 RDM

POWER / POWER SUPPLY	49W 48VDC 40.79" LED spacing 1.64"
CODE	TG6330040070 ■ N Black
OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO

ACCESSORIES


ACCESSORIES FOR INSTALLATION



Outer casing
WCTG10A0T - 12.32"
(Tago 1.0 / 4.0)
WCTG11A0T - 22.17"
(Tago 1.1 / 4.1)
WCTG13A0T - 41.85"
(Tago 1.3 / 4.3)



Outer casing
WCTG20A0F - 11.14"
(Tago 2.0 / 5.0)
WCTG21A0F - 20.98"
(Tago 2.1 / 5.1)
WCTG23A0F - 40.67"
(Tago 2.3 / 5.3)



Pair of adjustable brackets
WMA03N
(Tago 3 / 6)



Alignment kit for outer casings
WN6005
(Tago 2 / 5)



3-pin female connector
for in/out connection - IP66-IP68
WFA03



3-pin male connector
for in/out connection - IP66-IP68
WFA04



5-m 3-pin interconnect cable
(DALI or 0-10V version)
WFA0005
(Tago 1 / 2 / 3)



5-m 3-pin interconnect cable
for DMX signal
WFA0105
(Tago 4 / 5 / 6)

SPARE PARTS




IP68 "h"-type three-way
connector 4-pin
WFA02

TAGO


PHOTOMETRIC DATA

TAGO 1.0 / 2.0 / 3.0


S - 11°

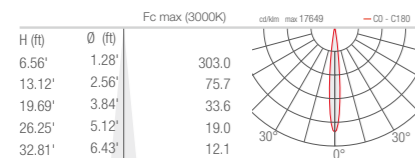

M - 17°

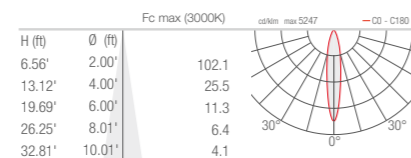


L - 29°

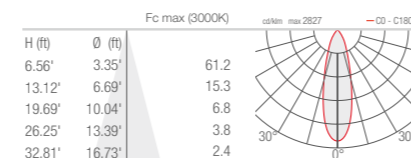


TAGO 4.0 / 5.0 / 6.0


S - 24°

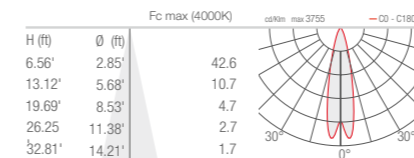


M - 30°

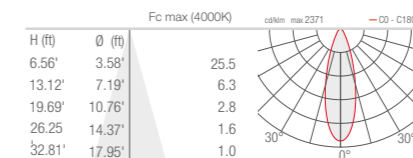


L - 52°

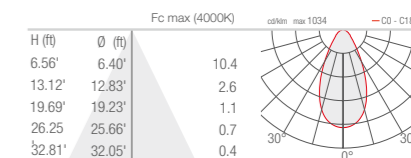


K - 69°

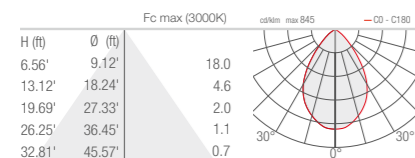


W - 20°x49°

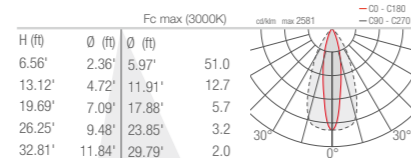

G - Wall grazing

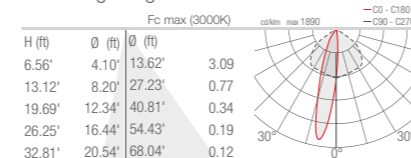

A - Wall washer

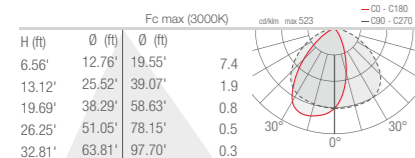

CONCEPT AND ART DIRECTION
valentinicesarottiassociati

© L&L LUCE&LIGHT SRL, 2022
ALL RIGHTS RESERVED

REV01/2022

TAGO 3.3
3000K, 51W, 69", nero/black

