

TAGO



Luce & Light

TAGO DESIGNED TO BRING FACADES TO LIFE

OUTDOOR LINEAR PROFILES





^
TAGO 2.0
3000K, 14W, 29°
with honeycomb louvre

TAGO



Tago is designed to provide architectural lighting for urban facades such as historic and public buildings, hotels and residential exteriors.

TAGO

MATERIALS

- ① TEMPERED EXTRA-CLEAR GLASS, UP TO 3.94" THICK, WITH GREY-VITRIFIED SERIGRAPHY, HIGH-TRANSMITTANCE TO ENSURE CHROMATIC HOMOGENEITY, AND EXCELLENT RESISTANCE TO KNOCKS AND SCRATCHES

IK09

- ② BODY MADE OF ANTICORODAL LOW-COPPER-CONTENT ALUMINUM EN AW 6060 T5 FOR EXCELLENT HEAT DISSIPATION, MANUFACTURED FROM AN EXTRUDED PROFILE AND SUBSEQUENTLY SUBJECTED TO A DEEP BLACK ELECTROCOLORING PROCESS OR PAINTED BLACK FOR EXCELLENT RESISTANCE TO CORROSION

- ③ ANTI-GLARE RECESSED OPTICS TO ENSURE VISUAL COMFORT



IN/OUT CONNECTION
Easy wiring with quick connectors designed to connect the profiles in a line in the dimmable versions.



BUILT-IN PROTECTION SYSTEMS:
IPS INTELLIGENT PROTECTION SYSTEM PID PROTECTIVE IMPEDANCE DEVICE



SUITABLE FOR OUTDOOR APPLICATIONS



TAGO 1 / 2 / 4 / 5
DRIVE-OVER UP TO 4409.24 lbs




TAGO 1 / 2 / 3
AVAILABLE IN DALI AND 0-10V DIMMABLE VERSIONS



TAGO 4 / 5 / 6
LIGHTING CONTROLLED USING THE DMX512+RDM PROTOCOL



TAGO 1 / 4
RECESSED WITH REBATED FRAME




TAGO 2 / 5
RECESSED FLUSH, WITHOUT FRAME



TAGO 3 / 6
SURFACE MOUNTED WITH BRACKET

TAGO

ADJUSTABILITY



TAGO 1 / 2
TILTING SYSTEM INSIDE THE OPTICAL UNIT. THE LIGHT DIRECTION CAN BE ALTERED BY +/- 20° EXTERNALLY WITH A SIMPLE ADJUSTMENT ON THE END CAPS, WITHOUT COMPROMISING THE FIXTURE'S IP65 AND IP67 PROTECTION LEVELS




TAGO 1 / 2 / 3
ANTI-GLARE ACCESSORIES. THE HONEYCOMB LOUVRE OR ANTI-GLARE SHIELD, WHICH CAN BE ORDERED AT THE SAME TIME AS THE FIXTURE, IS MOUNTED ON THE OPTICAL UNIT, SO THAT THE CHOSEN OPTION TILTS TOGETHER WITH THE OPTICS IN THE RECESSED VERSION



TAGO 3 / 6
THE BRACKET WITH TWO PIVOT POINTS ALLOWS THE LIGHT OUTPUT TO BE PRECISELY DIRECTED

TAGO


OPTICS

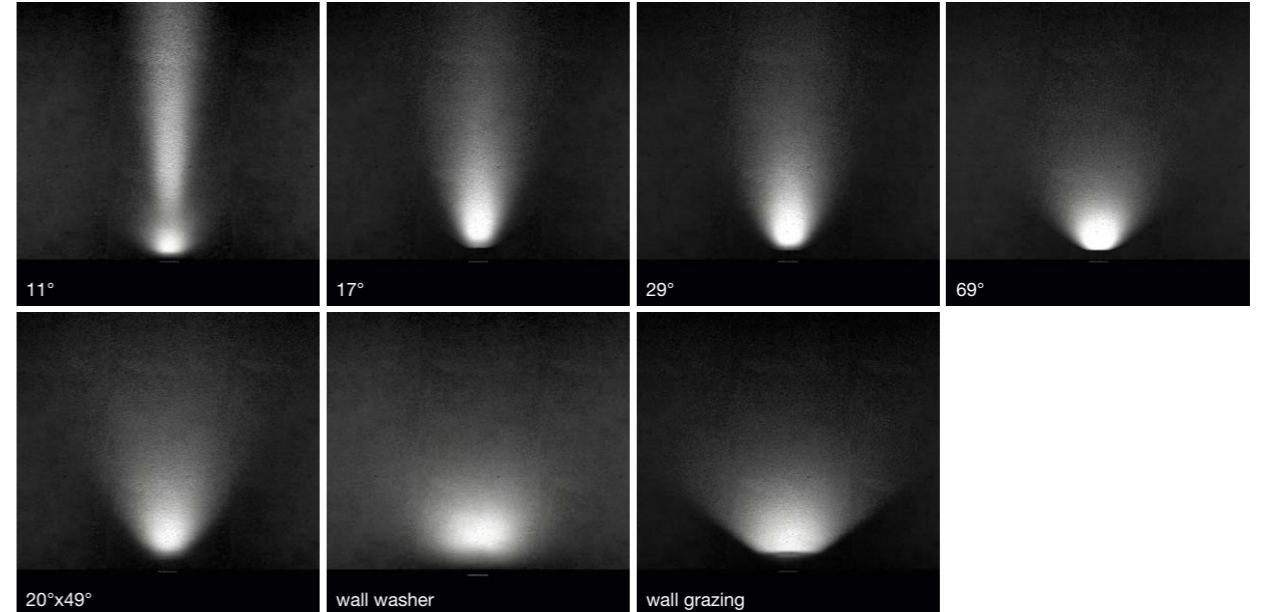

TAGO 1.0
PROFILE CENTRE DISTANCE FROM WALL, WALL WASHER OPTICS: 19.7",
OTHER OPTICS: 7.9"

TAGO

TONES OF LIGHT


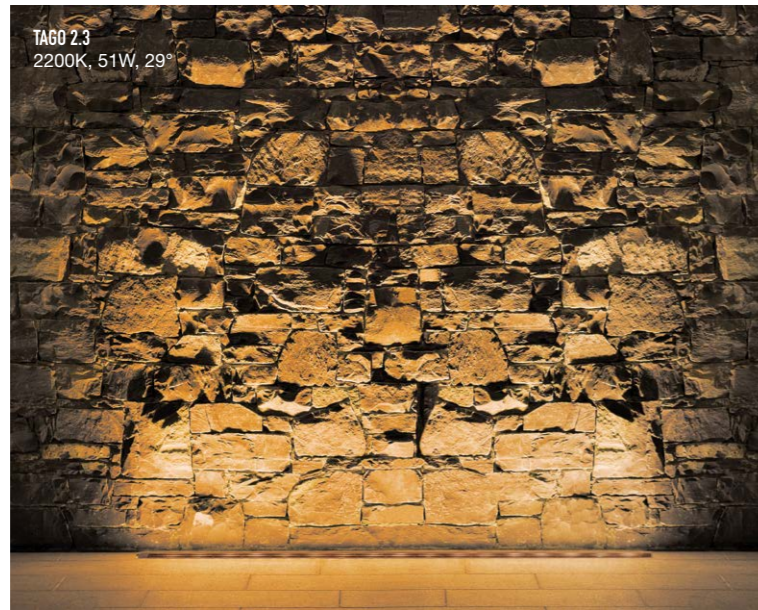


TAGO IS AVAILABLE WITH A 2200K WARM WHITE LIGHT.
THE USE OF WARM LIGHT SOURCES IN URBAN AND PUBLIC SETTINGS
RESPECTS THE CIRCADIAN CYCLES OF PEOPLE AND ANIMALS: EMISSIONS WITH
LONG WAVELENGTHS ARE COMPARABLE TO THE NATURAL LIGHT AT SUNSET.


[RGBW VERSION >](#)

TAGO

OUTDOOR LINEAR PROFILES



RECESSED, WITH REBATED FRAME



TAGO 1.0
14W 120-277VAC
12.68"



TAGO 1.1
24W 120-277VAC
22.52"



TAGO 1.3
51W 120-277VAC
42.20"



TAGO 4.0
14W 120-277VAC
DMX512, RDM
12.68"




TAGO 4.1
24W 120-277VAC
DMX512, RDM
22.52"



TAGO 4.3
49W 120-277VAC
DMX512, RDM
42.20"

RECESSED FLUSH, WITHOUT FRAME



TAGO 2.0
14W 120-277VAC
10.98"



TAGO 2.1
24W 120-277VAC
20.83"



TAGO 2.3
51W 120-277VAC
40.51"



TAGO 5.0
14W 120-277VAC
DMX512, RDM
10.98"



TAGO 5.1
24W 120-277VAC
DMX512, RDM
20.83"



TAGO 5.3
49W 120-277VAC
DMX512, RDM
40.51"

SURFACE MOUNTED, WITH BRACKETS



TAGO 3.0
14W 120-277VAC
11.26"



TAGO 3.1
24W 120-277VAC
21.10"



TAGO 3.3
51W 120-277VAC
40.79"



TAGO 6.0
14W 120-277VAC
DMX512, RDM
11.26"



TAGO 6.1
24W 120-277VAC
DMX512, RDM
21.10"



TAGO 6.3
49W 120-277VAC
DMX512, RDM
40.79"



LED TECH 2.92 lbs 4409.24 lbs IK09 IP65 IP67
 IPS PID T_{max} 104°F DALI 0-10V

POWER / MODEL CODE	14W 120-277VAC 12.68" LED spacing 0.79" TG10100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
CONTROL SYSTEM	2 - Integral 120-277VAC (0-10V Dimming)
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	1492 lm (3000K)
DELIVERED LUMEN OUTPUT	932 lm (3000K, 29°)
NO. AND TYPE OF LED	12 SMD LED pitch 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 4.64 lbs 4409.24 lbs IK09 IP65 IP67
 IPS PID T_{max} 104°F DALI 0-10V

POWER / MODEL CODE	24W 120-277VAC 22.52" LED spacing 0.79" TG11100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
CONTROL SYSTEM	2 - Integral 120-277VAC (0-10V Dimming)
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	2984 lm (3000K)
DELIVERED LUMEN OUTPUT	1864 lm (3000K, 29°)
NO. AND TYPE OF LED	24 SMD LED pitch 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 9.00 lbs 4409.24 lbs IK09 IP65 IP67
 IPS PID T_{max} 104°F DALI 0-10V

POWER / MODEL CODE	51W 120-277VAC 42.20" LED spacing 0.79" TG13100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
CONTROL SYSTEM	2 - Integral 120-277VAC (0-10V Dimming)
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°
LUMEN OUTPUT AT SOURCE	5968 lm (3000K)
DELIVERED LUMEN OUTPUT	3728 lm (3000K, 29°)
NO. AND TYPE OF LED	48 SMD LED pitch 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 2.56 lbs 4409.24 lbs IK09 IP65 IP67
 IPS PID T max 104°F DALI 0-10V

POWER / MODEL CODE 14W 120-277VAC 10.98" LED spacing 0.79"
TG20100 ■ 0 ■ ■ 0 ■ 0 ■ V

CONTROL SYSTEM 2 - Integral 120-277VAC (0-10V Dimming)

OPTICAL ACCESSORIES 0 - none
 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics)
 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)

LED COLOR N - 2200K
 F - 2700K
 5 - 3000K
 9 - 4000K

OPTICS S - 11° tiltable ±20°
 M - 17° tiltable ±20°
 L - 29° tiltable ±20°
 K - 69° tiltable ±20°
 W - 20°x49° tiltable ±20°
 G - wall grazing tiltable ±20°
 A - wall washer tiltable ±20°

LUMEN OUTPUT AT SOURCE 1492 lm (3000K)

DELIVERED LUMEN OUTPUT 932 lm (3000K, 29°)

NO. AND TYPE OF LED 12 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 4.07 lbs 4409.24 lbs IK09 IP65 IP67
 IPS PID T max 104°F DALI 0-10V

POWER / MODEL CODE 24W 120-277VAC 20.83" LED spacing 0.79"
TG21100 ■ 0 ■ ■ 0 ■ 0 ■ V

CONTROL SYSTEM 2 - Integral 120-277VAC (0-10V Dimming)

OPTICAL ACCESSORIES 0 - none
 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics)
 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)

LED COLOR N - 2200K
 F - 2700K
 5 - 3000K
 9 - 4000K

OPTICS S - 11° tiltable ±20°
 M - 17° tiltable ±20°
 L - 29° tiltable ±20°
 K - 69° tiltable ±20°
 W - 20°x49° tiltable ±20°
 G - wall grazing tiltable ±20°
 A - wall washer tiltable ±20°

LUMEN OUTPUT AT SOURCE 2984 lm (3000K)

DELIVERED LUMEN OUTPUT 1864 lm (3000K, 29°)

NO. AND TYPE OF LED 24 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 8.06 lbs 4409.24 lbs IK09 IP65 IP67
 IPS PID T max 104°F DALI 0-10V

POWER / MODEL CODE 51W 120-277VAC 40.51" LED spacing 0.79"
TG23100 ■ 0 ■ ■ 0 ■ 0 ■ V

CONTROL SYSTEM 2 - Integral 120-277VAC (0-10V Dimming)

OPTICAL ACCESSORIES 0 - none
 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics)
 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)


LED COLOR N - 2200K
 F - 2700K
 5 - 3000K
 9 - 4000K

OPTICS S - 11° tiltable ±20°
 M - 17° tiltable ±20°
 L - 29° tiltable ±20°
 K - 69° tiltable ±20°
 W - 20°x49° tiltable ±20°
 G - wall grazing tiltable ±20°
 A - wall washer tiltable ±20°

LUMEN OUTPUT AT SOURCE 5968 lm (3000K)

DELIVERED LUMEN OUTPUT 3728 lm (3000K, 29°)

NO. AND TYPE OF LED 48 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



Optics 20°x49°



LED TECH 2.39 lbs IK09 IP65 IP67 DALI 0-10V
 IPS PID

POWER / MODEL CODE	14W 120-277VAC 11.26" LED spacing 0.79" TG30100 ■ 0 ■ 0 ■ 0 ■ N Black
■ CONTROL MANAGEMENT	2 - Integral 120-277VAC (0-10V Dimming)
■ OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
■ LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer
LUMEN OUTPUT AT SOURCE	1492 lm (3000K)
DELIVERED LUMEN OUTPUT	932 lm (3000K, 29°)
NO. AND TYPE OF LED	12 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 4.15 lbs IK09 IP65 IP67 DALI 0-10V
 IPS PID

POWER / MODEL CODE	24W 120-277VAC 21.10" LED spacing 0.79" TG31100 ■ 0 ■ 0 ■ 0 ■ N Black
■ CONTROL MANAGEMENT	2 - Integral 120-277VAC (0-10V Dimming)
■ OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
■ LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer
LUMEN OUTPUT AT SOURCE	2984 lm (3000K)
DELIVERED LUMEN OUTPUT	1864 lm (3000K, 29°)
NO. AND TYPE OF LED	24 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)




LED TECH 7.94 lbs IK09 IP65 IP67 DALI 0-10V
 IPS PID

POWER / MODEL CODE	51W 120-277VAC 40.79" LED spacing 0.79" TG33100 ■ 0 ■ 0 ■ 0 ■ N Black
■ CONTROL MANAGEMENT	2 - Integral 120-277VAC (0-10V Dimming)
■ OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
■ LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer
LUMEN OUTPUT AT SOURCE	5968 lm (3000K)
DELIVERED LUMEN OUTPUT	3728 lm (3000K, 29°)
NO. AND TYPE OF LED	48 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

TAGO 4.0




3 cable glands, 2 connectors




POWER / MODEL CODE 14W 120-277VAC 12.68" LED spacing 1.61"
TG4030040070 ■ Anodized black

OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 4.1

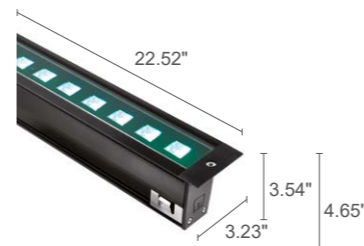


3 cable glands, 2 connectors



29W 120-277VAC 22.52" LED spacing 1.61"
TG4110040070 ■ N Anodized black

OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 4.3

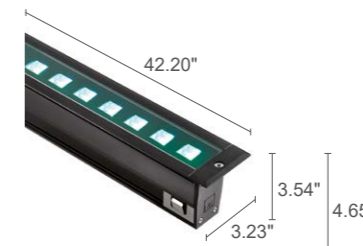

3 cable glands, 2 connectors




55W 120-277VAC 42.20" LED spacing 1.61"
TG4310040070 ■ N Anodized black

OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 5.0




3 cable glands, 2 connectors



POWER / MODEL CODE 14W 120-277VAC 10.98" LED spacing 1.61"
TG5030040070 ■ V

OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 5.1

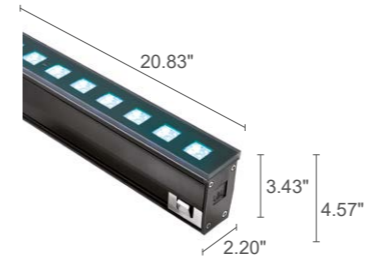


3 cable glands, 2 connectors



29W 120-277VAC 20.83" LED spacing 1.61"
TG5110040070 ■ V

OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 5.3

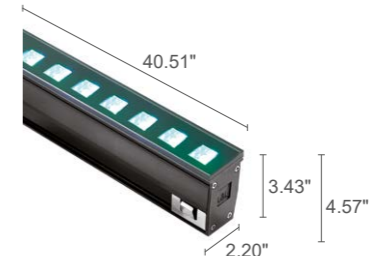


3 cable glands, 2 connectors




55W 120-277VAC 40.51" LED spacing 1.61"
TG5310040070 ■ V

OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 6.0



3 cable glands, 2 connectors




 5.29 lbs
 IK09 IP65 IP67 DMX512 RDM






POWER / MODEL CODE	14W 48VDC 11.26" LED spacing 1.61" TG6030040070 ■ N Black
OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 6.1




3 cable glands, 2 connectors



 120-277VAC
 7.94 lbs 120-277VAC
 IK09 IP65 IP67 DMX512 RDM




POWER / MODEL CODE	29W 120-277VAC 21.10" LED spacing 1.61" TG6110040070 ■ N Black
OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)

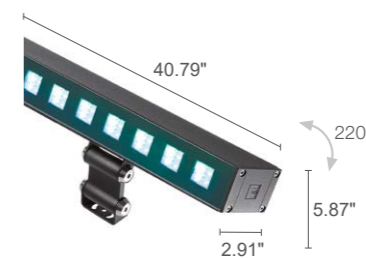TAGO 6.3



3 cable glands, 2 connectors



 122-277VAC 48VDC
 12.35 lbs 120-277VAC
 IK09 IP65 IP67 DMX512 RDM




POWER / MODEL CODE	55W 120-277VAC 40.79" LED spacing 1.61" TG6310040070 ■ N Black
OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO

ACCESSORIES

ACCESSORIES FOR INSTALLATION



Outer casing
WCTG10A0T -
12.32" (Tago 1.0 / 4.0)
WCTG11A0T -
22.17" (Tago 1.1 / 4.1)
WCTG13A0T -
41.85" (Tago 1.3 / 4.3)



Outer casing
WCTG20A0F -
11.14" (Tago 2.0 / 5.0)
WCTG21A0F -
20.98" (Tago 2.1 / 5.1)
WCTG23A0F -
40.67" (Tago 2.3 / 5.3)



Pair of adjustable brackets
WMA03N
(Tago 3 / 6)



Alignment kit for outer casings
WN6005
(Tago 2 / 5)



3-pin female connector
for in/out connection - IP66-IP68
WFA03
included with fixture



3-pin male connector
for in/out connection - IP66-IP68
WFA04

*REQUIRED when daisy-chaining
fixtures that are more than 1.5
meters/ 4.9 feet apart
MUST BE ORDERED WITH WFA0005



16.40' (5-m) 3-pin interconnect cable
(DALI or 0/1-10V version)
WFA0005
(Tago 1 / 2 / 3)
*REQUIRED when daisy-chaining
fixtures that are more than 1.5
meters/ 4.9 feet apart
MUST BE ORDERED WITH WFA04



16.40' (5-m) 3-pin interconnect cable
for DMX signal
WFA0105
(Tago 4 / 5 / 6)

SPARE PARTS










IP68 "h"-type three-way
connector 4-pin
WFA02




TAGO

PHOTOMETRIC DATA

TAGO 1.0 / 2.0 / 3.0

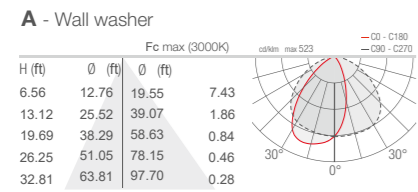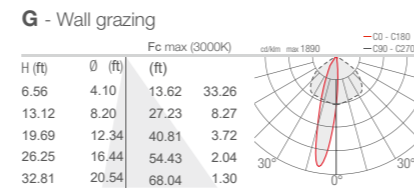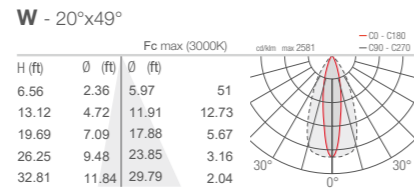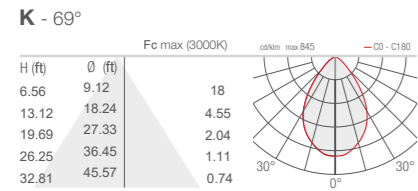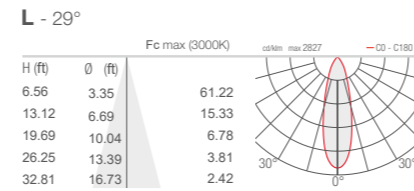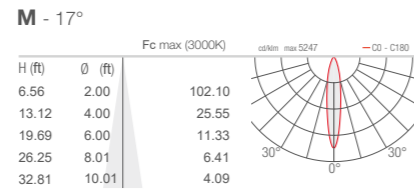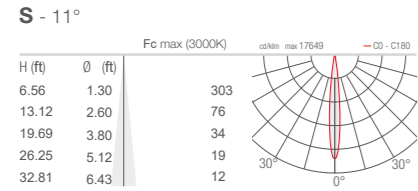

TAGO 4.0 / 5.0 / 6.0

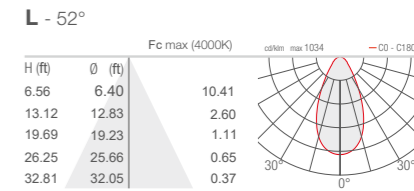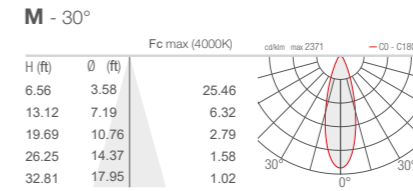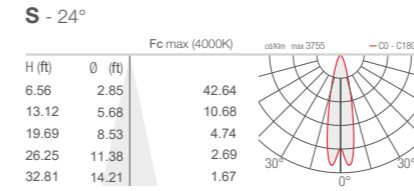

CONCEPT AND ART DIRECTION
valentinicesarottiassociati

© L&L LUCE&LIGHT SRL, 2022
ALL RIGHTS RESERVED

REV01/2022

TAGO 3.3
3000K, 51W, 69°, black



