


Talon Roof is an IP65 rated, surface mounted LED luminaire that is suitable for installation on ceilings. It is available in 4 optics options and 5 standard finishes. Also available in a wall mounted version, Talon Wall or recessed version, Talon Recessed.



TECHNICAL DATA

Wattage / Input	8.2W, 4.8W (diffused version)
Power Supply	Integral 120VAC
Construction	Body: Die-Cast Aluminum Lens: Tempered, Transparent Glass
CCT	2700K, 3000K
CRI	>80
BUG Rating	B1-U0-G0 (19°, 32° - 3000K) B0-U1-G0 (Diffuse - 3000K)
Delivered Lumens	800 lm (32°, 3000K) 506 lm (Diffuse, 3000K)
Efficacy	74.8 lm/W (32°, 3000K) 87.2 lm/W (Diffuse, 3000K)
Optics	19°, 32°, 65°, Diffuse
LED Source	Power LED or Mid Power LED (Diffuse)
Finishes	5 Standard, See Below
Fixture Dimensions	3.94" l x 3.15" w x 4.33" h
IP Rating	IP65

Fixture Dimensions



ORDERING INFORMATION

Example: D901111144.US

D9011				US
Model No.	CCT	Optics / Wattage	Finish	
D9011	311 - 2700K 111 - 3000K	2 - 19°, 8.2W 3 - 32°, 8.2W 4 - 65°, 8.2W 5 - Diffuse, 4.8W	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten	US

Job Name/Date:

Fixture Type Designation:

FINISHES



white



sand



graphite



aluminum




corten

PHOTOMETRIC DATA

19°


Maximum Candela = 4740.4

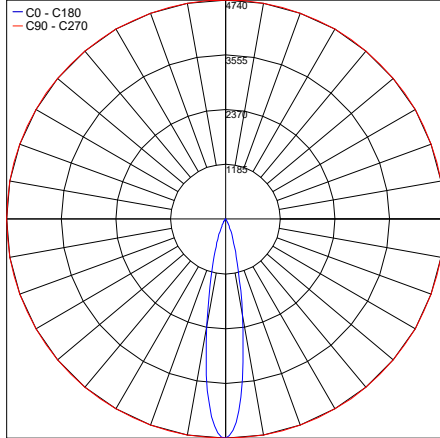

PHOTOMETRIC FILENAME : TALON ROOF 19° 3000K.IES

32°


Maximum Candela = 2818.7

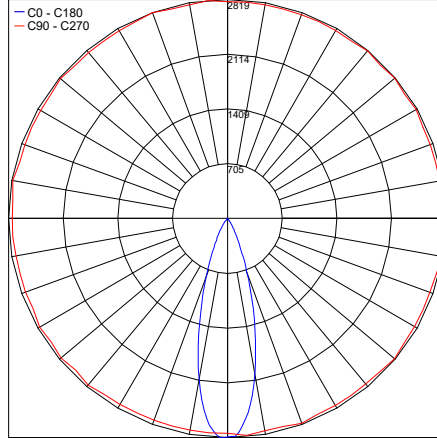

PHOTOMETRIC FILENAME : TALON ROOF 32° 3000K.IES

Diffuse

Maximum Candela = 209.5

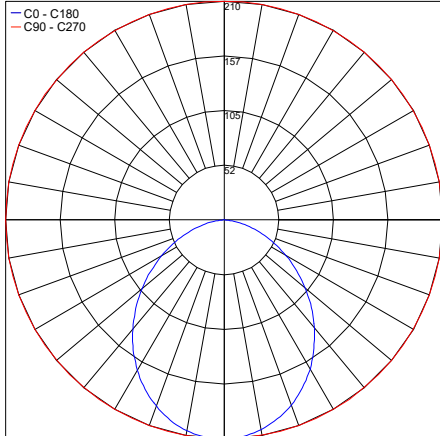

PHOTOMETRIC FILENAME : TALON ROOF DIFFUSED 3000K.IES

Job Name/Date:

Fixture Type Designation: