


Talon Roof is an IP65 rated, surface mounted LED luminaire that is suitable for installation on ceilings. It is available in 4 optics options and 5 standard finishes. Also available in a wall mounted version, Talon Wall or recessed version, Talon Recessed.



## TECHNICAL DATA

<b>Wattage / Input</b>	10.7W, 5.8W (diffused version)
<b>Power Supply</b>	Integral 120VAC
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Tempered, Transparent Glass
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B1-U0-G0 (19°, 32° - 3000K) B0-U1-G0 (Diffuse - 3000K)
<b>Delivered Lumens</b>	800 lm (32°, 3000K) 506 lm (Diffuse, 3000K)
<b>Efficacy</b>	74.8 lm/W (32°, 3000K) 87.2 lm/W (Diffuse, 3000K)
<b>Optics</b>	19°, 32°, 65°, Diffuse
<b>LED Source</b>	Power LED or Mid Power LED (Diffuse)
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	3.94" l x 3.15" w x 4.33" h
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK05

Fixture Dimensions



## ORDERING INFORMATION

Example: D901111144.US

D9011				US
Model No.	CCT	Optics / Wattage	Finish	
D9011	311 - 2700K 111 - 3000K	2 - 19°, 10.7W 3 - 32°, 10.7W 4 - 65°, 10.7W 5 - Diffuse, 5.8W	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten	US

Job Name/Date:

Fixture Type Designation:

## FINISHES



white



sand



graphite



aluminum




corten

## PHOTOMETRIC DATA

19°


Maximum Candela = 4740.4

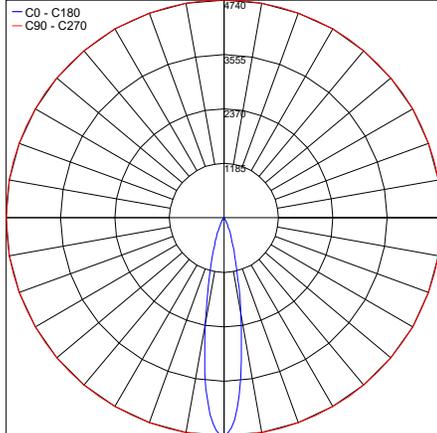

PHOTOMETRIC FILENAME : TALON ROOF 19° 3000K.IES

32°


Maximum Candela = 2818.7

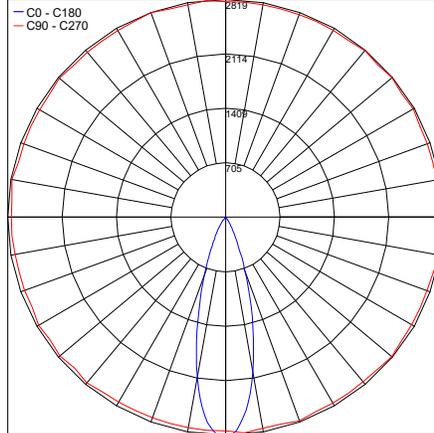

PHOTOMETRIC FILENAME : TALON ROOF 32° 3000K.IES

Diffuse

Maximum Candela = 209.5

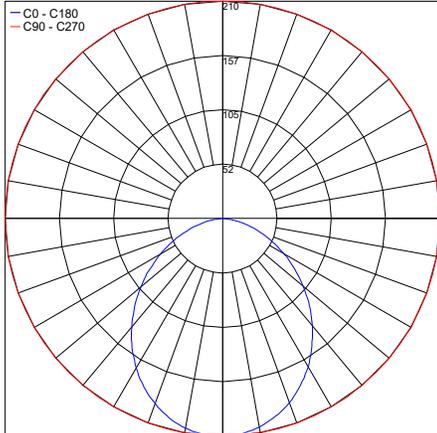

PHOTOMETRIC FILENAME : TALON ROOF DIFFUSED 3000K.IES

Job Name/Date:

Fixture Type Designation: