

Talon Wall is an IP65 rated, surface mounted, mono or bidirectional LED luminaire that comes in 2 sizes and is suitable for installation on walls. It is available in 4 optics options and 5 standard finishes. Available in a ceiling mounted version, Talon Roof or recessed version, Talon Recessed.


TECHNICAL DATA

Wattage / Input	2 x 8.2W (double), 8.2W (single) Diffuse: 2 x 4.8W (double), 4.8W (single)
Power Supply	Integral 120VAC
Construction	Body: Die-Cast Aluminum Lens: Tempered, Transparent Glass
CCT	2700K, 3000K
CRI	>80
BUG Rating	B1-U0-G0 (Single, 3000K - 19°, 32°, 56°) B0-U1-G0 (Single, 3000K, Diffuse)
Delivered Lumens	800 lm per beam (32°, 3000K) 506 lm per beam (diffuse, 3000K)
Efficacy	74.8 lm/W per beam (32°, 3000K) 87.2 lm per beam (diffuse, 3000K)
Optics	19°, 32°, 65°, Diffuse
LED Source	Power LED or Mid Power LED (diffused)
Finishes	5 Standard, See Below
Fixture Dimensions	3.94" l x 3.15" w x 3.94" or 9.84" h
IP Rating	IP65
Impact Resistance	IK05




ADA Compliant

Fixture Dimensions



MONODIRECTIONAL

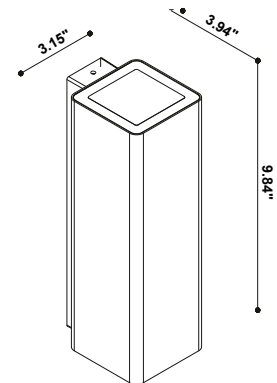

BIDIRECTIONAL

ORDERING INFORMATION

Example: D901111054.US

D9011				US
Model No.	CCT	Optics, Beam, Wattage	Finish	
D9011	310 - 2700K 110 - 3000K	0 - 19°, Bidirectional (2 x 8.2W) 3 - 19°, Monodirectional (8.2W) 1 - 32°, Bidirectional (2 x 8.2W) 4 - 32°, Monodirectional (8.2W) 2 - 65°, Bidirectional (2 x 8.2W) 5 - 65°, Monodirectional (8.2W)	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten	US
	311 - 2700K 111 - 3000K	1 - Diffuse, Bidirectional (2 x 4.8W) 0 - Diffuse, Monodirectional (4.8W)		

Job Name/Date:

Fixture Type Designation:

FINISHES



white



sand



graphite



aluminum




corten

PHOTOMETRIC DATA

19°


Maximum Candela = 4740.4

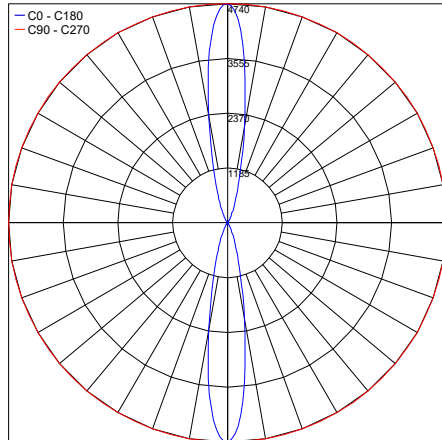

PHOTOMETRIC FILENAME : TALON WALL DOUBLE 19°_3000K.IES

32°


Maximum Candela = 2818.7

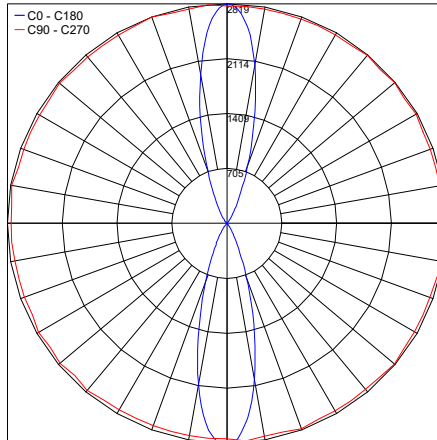

PHOTOMETRIC FILENAME : TALON WALL DOUBLE 32°_3000K.IES

65°


Maximum Candela = 916.4

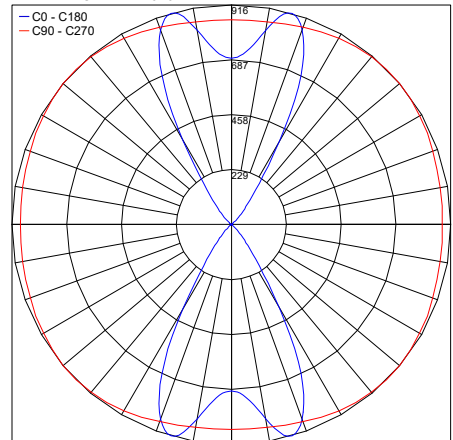

PHOTOMETRIC FILENAME : TALON WALL DOUBLE 65°_3000K.IES


Diffuse

Maximum Candela = 209.5

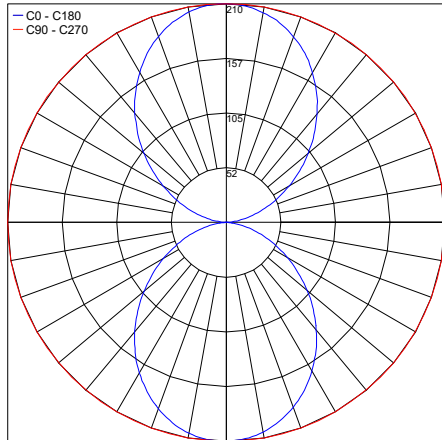

PHOTOMETRIC FILENAME : TALON WALL DOUBLE DIFFUSED_3000K.IES

Maximum Candela = 209.5

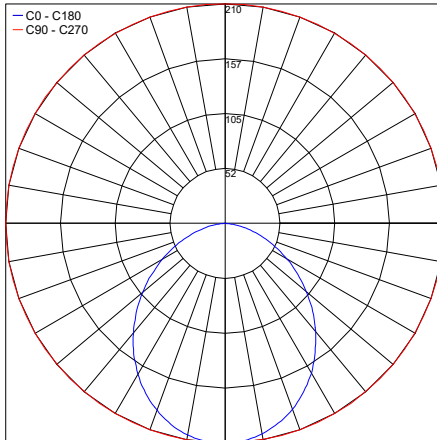

PHOTOMETRIC FILENAME : TALON WALL MONO DIFFUSED_3000K.IES

Job Name/Date:

Fixture Type Designation: