


TAURUS SINGLE

Taurus is an indoor recessed downlight made of Coral® that is available with a single, double or triple rearward spotlight that is extractable and adjustable on both axes. It comes in 3000K as standard with a 22° optic - installable on plasterboard ceilings or walls.

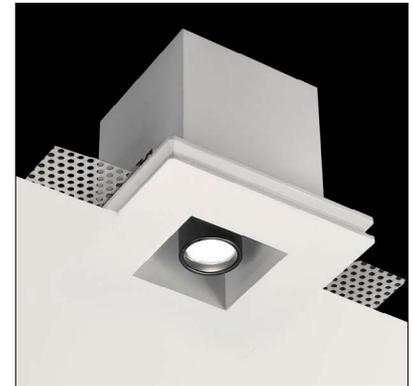

TECHNICAL DATA


Wattage / Input	6W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Coral®
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	452 lm (3000K)
Efficacy	75.3 lm/W
Optics	22°
Finishes	Black, White
Fixture Dimensions	4.33" l x 4.33" w x 3.94" h
Cut-out Dimension	4.72" x 4.72"
Aperature	1.97" x 1.97"
Fixture Weight	2.20 lbs
IP Rating	IP40

The body is made of Coral® a unique patented composite material made from natural minerals and aggregating elements.

Additionally, Coral® is:

- Extreme resistance to high temperatures and thermal shock.
- Highly impervious to knocks and scratches.
- Can easily be decorated with any type of paint (water or spirit based).
- Made of non-toxic materials and is non-allergic.
- Does not produce fumes, even in case of fire.
- Naturally dust repellent.

Fixture Dimensions

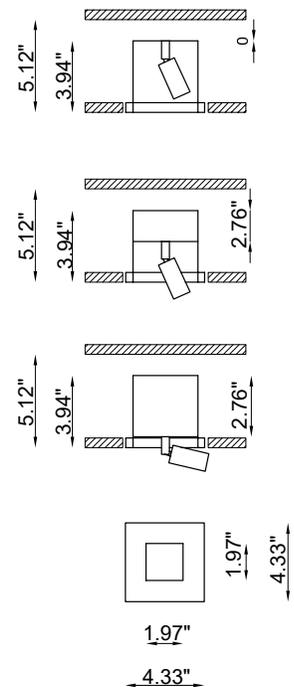

ORDERING INFORMATION

Example: BU1831.27.00.US. Power Supplies ordered separately.

		00	US
Model No.	CCT	Finish	
BU1831 - Black	30 - 3000K (standard)	00 - Coral®	US
BU1834 - White	27 - 2700K (on request)		
	40 - 4000K (on request)		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2, DAMP	1-1
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	1-2
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 50W, Class 2	1-8
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-4

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
PPLT00676	PEQOE	PEQ0	100%-0.1%	Hi-Lume Premier 0.1% EcoSystem™ LED Driver	120-277VAC to 500mA, 20W, Class 2	1-3

For other power supply options consult factory.

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 1874.3

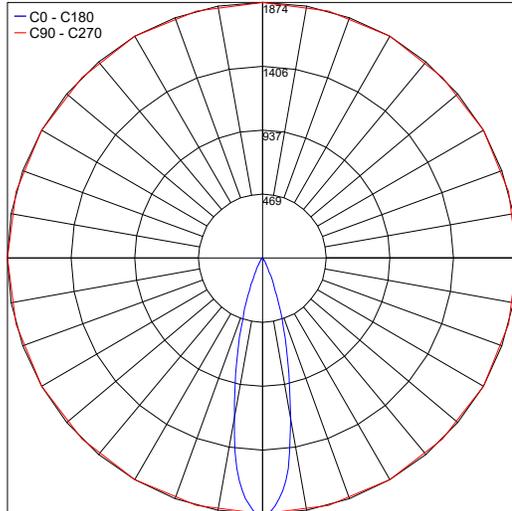

ACCESSORIES

Anti-Glare



ACC0047
Honeycomb Screen

Job Name/Date:

Fixture Type Designation: