

TAURUS



REMOVABLE AND SWIVELLING
1, 2 OR 3 LIGHT POINTS, WHITE OR
BLACK

SUPERFUTUREDESIGN*



Taurus







OTHER AVAILABLE CODES

BU1831.00. B 2 22 M 27 WD	<i>lens</i>	22°
	<i>light color</i>	2700K
BU1831.00. B 2 22 M 40 WD	<i>lens</i>	22°
	<i>light color</i>	4000K (on request)
BU1834.27.00	<i>lens</i>	22°
	<i>light color</i>	2700K
BU1834.40.00	<i>lens</i>	22°
	<i>light color</i>	4000K (on request)



OPTIONAL
Honeycomb: anti-glare screen
for proper light directionally.

Indoor Recessed



TECHNICAL FEATURES

Code	BU1831.00	BU1834.00
Type	Tilttable downlight ± 360° / ± 90°	Tilttable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®
Finishing	Black	White
Weight	2.20 lbs	2.20 lbs
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Insulation class	Remote constant current	Remote constant current
Control gear	electronic driver (not included)	electronic driver (not included)
Cut out for plasterboard	4.72 × 4.72 in	4.72 × 4.72 in
Lamp type	LED 500mA	LED 500mA
	⚡ V: 11 VDC	⚡ V: 11 VDC
Lamp wattage	1 × 6W	1 × 6W
Luminous efficacy	1 × 520 lm - 3000K	1 × 520 lm - 3000K
Light distribution	Beam 22°	Beam 22°
Fitting	-	-
Light color	White 3000K	White 3000K
Light hole	1.97 × 1.97 in	1.97 × 1.97 in
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Note	Other available light colors: 2700K, 4000K (on request).	Other available light colors: 2700K, 4000K (on request).
	Other available beams: 50° (on request).	Other available beams: 50° (on request).

OPTIONAL

Honeycomb screen

cod. ACC0047

cod. ACC0047

designplan®



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



Taurus 2

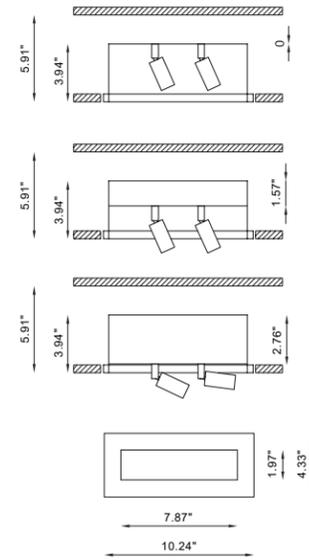

OPTIONAL
Honeycomb: anti-glare screen
for proper light directionally.

OTHER AVAILABLE CODES

BU1832.00. B 2 22 E 27 WD	<i>lens</i>	22°
	<i>light color</i>	2700K
BU1835.00 B 2 22 E 27 WD	<i>lens</i>	22°
	<i>light color</i>	2700K
BU1835.40.00	<i>lens</i>	22°
	<i>light color</i>	4000K (on request)

TECHNICAL FEATURES



Code	BU1832.00	BU1835.00
Type	Tilttable downlight ± 360° / ± 90°	Tilttable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®
Finishing	Black	White
Weight	4.41 lbs	4.41 lbs
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Cut out for plasterboard	10.63 × 4.72 in	10.63 × 4.72 in
Lamp type	LED 500 mA ⚡ Vf: 2 × 11 VDC	LED 500 mA ⚡ Vf: 2 × 11 VDC
Lamp wattage	2 × 6W	2 × 6W
Luminous efficacy	2 × 520 lm - 3000K	2 × 520 lm - 3000K
Light distribution	Beam 22°	Beam 22°
Fitting	-	-
Light color	White 3000K	White 3000K
Light hole	1.97 × 7.87 in	1.97 × 7.87 in
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Note	Other available light colors: 2700K, 4000K (on request). Other available beams: 50° (on request).	Other available light colors: 2700K, 4000K (on request). Other available beams: 50° (on request).

OPTIONAL

Honeycomb screen	cod. ACC0047	cod. ACC0047
------------------	--------------	--------------



Taurus 3

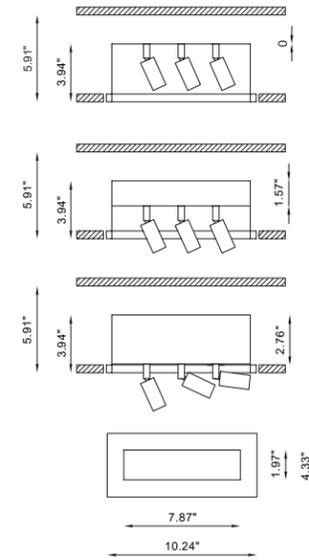

OPTIONAL
Honeycomb: anti-glare screen
for proper light directionally.

OTHER AVAILABLE CODES

BU1833.00. B 2 22 E 40 WD	<i>lens</i>	22°
	<i>light color</i>	4000K (on request)
BU1836.00 2 22 E 27 WD	<i>lens</i>	22°
	<i>light color</i>	2700K

TECHNICAL FEATURES

Code	BU1833.00	BU1836.00
Type	Tilttable downlight ± 360° / ± 90°	Tilttable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®
Finishing	Black	White
Weight	4.63 lbs	4.63 lbs
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Insulation class	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Cut out for plasterboard	10.63 × 4.72 in	10.63 × 4.72 in
Lamp type	LED 500 mA ⚡ Vf: 3 × 11 VDC	LED 500 mA ⚡ Vf: 3 × 11 VDC
Lamp wattage	3 × 6W	3 × 6W
Luminous efficacy	3 × 520 lm - 3000K	3 × 520 lm - 3000K
Light distribution	Beam 22°	Beam 22°
Fitting	-	-
Light colour	White 3000K	White 3000K
Light hole	1.97 × 1.97 in	1.97 × 1.97 in
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Note	Other available light colors: 2700K, 4000K (on request). Other available beams: 50° (on request).	Other available light colors: 2700K, 4000K (on request). Other available beams: 50° (on request).

OPTIONAL

Honeycomb screen	cod. ACC0047	cod. ACC0047
------------------	--------------	--------------

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042