

TECH MEDIUM 02 ROUND


Tech Medium 02 Round is a wall mounted luminaire for outdoor installation with an up and down light distribution and adjustable +/- 15°. It is available in 2 color temperatures, 3 optic options and 3 standard finishes.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 2 x 8W (120VAC) |
| Power Supply | Integral |
| Construction | Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass |
| CCT | 3000K, 4000K |
| Delivered Lumens | 720 lm per beam(3000K, 10°) |
| Efficacy | 90.0 lm/W per beam (3000K, 10°) |
| Optics | 3 Standard, See Below |
| Finishes | Textured Gray, Anthracite Gray, Matte Black (on request) |
| Fixture Dimensions | Ø5.51" x 9.37" h |
| LED Source | 5 x 1.5W CREE "XP-G3" High Power LEDs up and down. |
| Fixture Weight | 6.6 lbs |
| IP Rating | IP65 |
| IK Rating | IK09 |

Fixture Dimensions

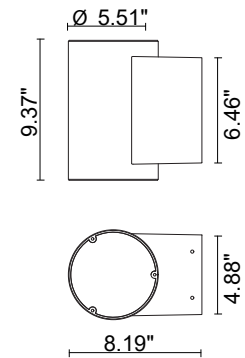

ORDERING INFORMATION

Example: 401004P-30K-10-MB

| 401004P | - | | - | | - | |
|-----------|----------------------------|----------------------------------|---|--|---|--|
| Model No. | CCT | Optics | Finish | | | |
| 401004P | 30K - 3000K 40K - 4000K | 10 - 10° 30 - 30° 45 - 45° | TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request) | | | |


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: all photometry is 3000K

Maximum Candela = 15562.5

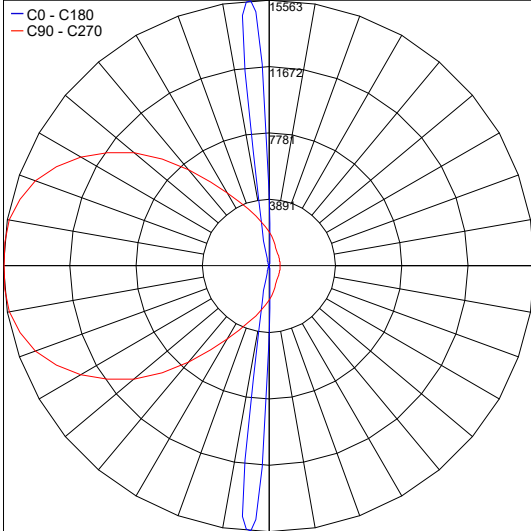

PHOTOMETRIC FILENAME : 401004_10°.IES

Maximum Candela = 1429.3

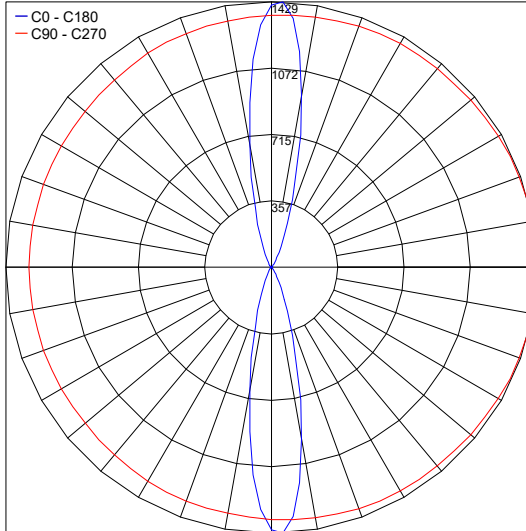

PHOTOMETRIC FILENAME : 401004_30°.IES

Job Name/Date:

Fixture Type Designation: