

## Technical features


IP65 IK09



401016P

## TECH MEDIUM 02 ROUND PRO

Round up&down luminaire for outdoor installation on a facade/wall. Phosphochromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 2 x 5 CREE XP-L LED. IP65 rating.

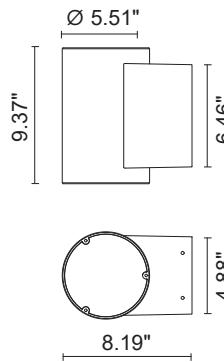

## Technical data

Wattage	2x14W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 5 CREE "XP-L" LED up and NR. 5 CREE "XP-L" LED down
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Rubber grommet	M20 Rutaseal® in EPDM
Glass	Tempered
Gross weight	6.6 lbs

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	10°	2 x 1,300	92.86
high-power led	30°	2 x 1,230	87.86
high-power led	45°	2 x 1,170	83.57

\* Other light colors available on request: Neutral-white

### Finish color options:

 Textured Gray  
RAL 9006

 Anthracite Gray  
RAL 7016

 Matte Black  
(on request)

