


# TECH MEDIUM 02 SQUARE PRO


Tech Medium 02 Square Pro is a wall mounted luminaire for outdoor installation with an up and down light distribution and adjustable +/- 15°. It is available in 3000K with 3 optic options and 3 standard finishes.

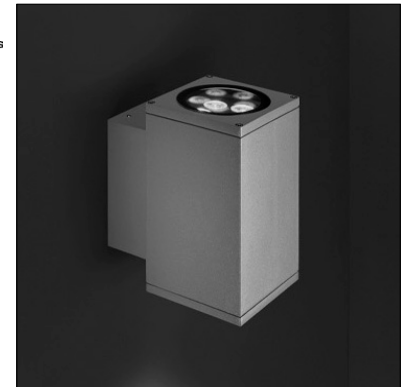

## TECHNICAL DATA

<b>Wattage / Input</b>	2 x 14W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass
<b>CCT</b>	3000K
<b>BUG Rating</b>	B3-U5-G0 (10°)
<b>Delivered Lumens</b>	1300 lm per beam (10°)
<b>Efficacy</b>	92.9 lm/W per beam
<b>Optics</b>	3 Standard, See Below
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black (on request)
<b>Fixture Dimensions</b>	5.51" w x 5.51" l x 9.37" h
<b>LED Source</b>	5 CREE "XP-L" High Power LED up and 5 CREE "XP-L" High Power LED down
<b>Fixture Weight</b>	6.6 lbs
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK09

Fixture Dimensions

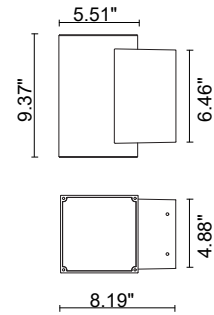

## ORDERING INFORMATION

Example: 401018P-30K-10-MB


401018P	-	30K	-		-	
Model No.	CCT	Optics	Finish			
401018P	30K - 3000K	10 - 10° 30 - 30° 45 - 45°	<b>TG</b> - Textured Gray <b>AG</b> - Anthracite Gray <b>MB</b> - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Maximum Candela = 53240.2

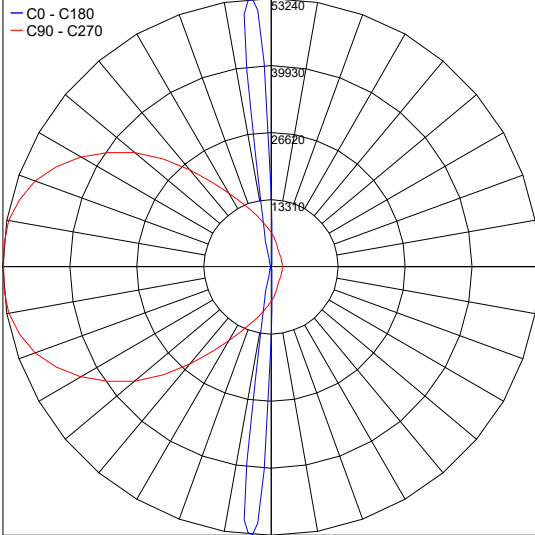

PHOTOMETRIC FILENAME : 401018 TECH MED 02 SQ PRO 2X14 10°.IES

Maximum Candela = 5726.6

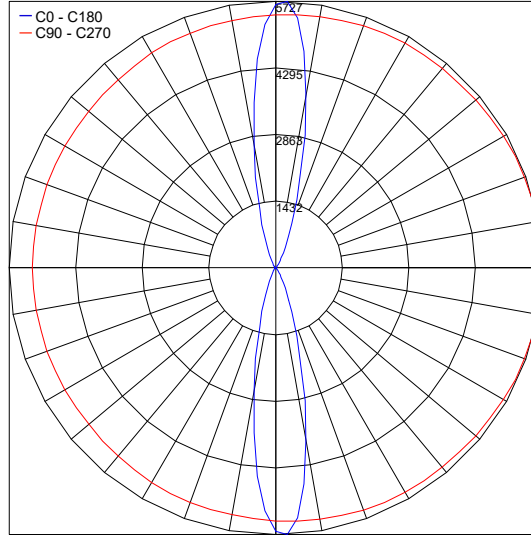

PHOTOMETRIC FILENAME : 401018 TECH MED 02 SQ PRO 2X14 30°.IES

Job Name/Date:

Fixture Type Designation: