

TEKNO




RECTANGULAR RECESSED FIXTURE
WITH RETRACTED GLASS

Indoor Recessed



Tekno

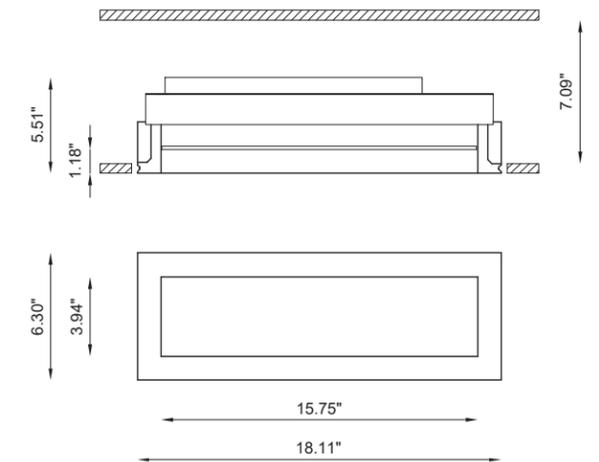

TECHNICAL FEATURES

Code	BU6051.AC	BU6052.AC
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	118.83 ft²	118.83 ft²
Weight	13.23 lbs	13.23 lbs
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Control gear	ON/OFF driver (included)	ON/OFF driver (included)
Cut out for plasterboard	6.69 × 18.50 in	6.69 × 18.50 in
Lamp type	LED 350 mA	LED 350 mA
Lamp wattage	1 × 12W	2 × 12W
Luminous efficacy	1 × 1640 lm - 3000K	2 × 1640 lm - 3000K
Light distribution	Wide beam 120°	Wide beam 120°
Fitting	-	-
Light color	White 3000K	White 3000K
Light hole	3.94 × 15.75 in	3.94 × 15.75 in
Voltage connection	50/60Hz	50/60Hz
CRI	>90	>90
Note	Extra white satin glass. Frosted glass recessed 1.18 in into the ceiling. Other available light colors: 2700K (on request), 4000K (on request).	Extra white satin glass. Frosted glass recessed 1.18 in into the ceiling. Other available light colors: 2700K (on request), 4000K (on request).

OPTIONAL

Brick box	cod. BR6051LT	cod. BR6052LT
-----------	---------------	---------------

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²