


Teko is a family of indoor, ceiling mounted fixtures available in 2 shapes, a cube or cylinder, each with diffuse optics. Teko 5.1 is the smaller cylinder shape in 5W or 9W and 3 color temperatures options.



TECHNICAL DATA

Wattage / Input	5W (500mA), 9W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anodized Aluminum Lens: Frosted Plexiglass
CCT	2700K, 3000K, 4000K
CRI	80
Delivered Lumens	382 lm (3000K, 5W) 684 lm (3000K, 9W)
Efficacy	76.4 lm/W (3000K, 5W) 76.0 lm/W (3000K, 9W)
Optics	Diffuse
Finishes	White, Custom RAL
Fixture Dimensions	Ø3.15" x 3.94" h
Fixture Weight	1.23 lbs
LED Source	Power LED Matrix
Lumen Maintenance	L80, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	32°F to 113°F
IP Rating	IP40

Fixture Dimensions



ORDERING INFORMATION

Example: TK51105DB. Power Supplies ordered separately.

<input type="text"/>	<input type="text"/>	<input type="text" value="D"/>	<input type="text"/>
Model No.	CCT	Optics	Finish
TK5110 - 5W (500mA)	F - 2700K	D - Diffuse	B - White
TK5111 - 9W (350mA)	5 - 3000K		C - Custom RAL
	9 - 4000K		(consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA - 5W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2, DAMP	1-1
PPLT00469	Phase Dim (120V Only)	120VAC to 500mA, 14W, Class 2	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA 20W, Class 2	1-4
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-4
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2, DAMP	1-16

Lutron Compatible Drivers

500mA - 5W version

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 10W	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	2-3
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC , 27W	3-4

350mA - 9W version

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2, DAMP	1-1
PPLT00468	Phase Dim (120V Only)	120VAC to 500mA, 14W, Class 2	1-1
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-2
PPLT00263	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-2
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2, DAMP	1-8

Lutron Compatible Drivers

350mA - 9W version

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 13W	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	2-2

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

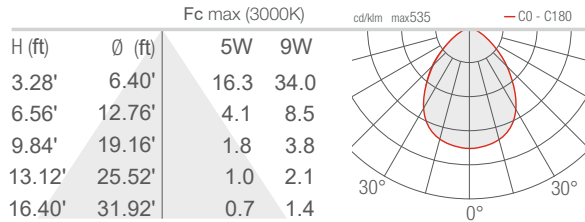

Job Name/Date:

Fixture Type Designation: