


Teko is a family of indoor, ceiling mounted fixtures available in 2 shapes, a cube or cylinder, each with diffuse optics. Teko 7.1 is the larger cylinder shape in 9W with 3 color temperature options.



TECHNICAL DATA

Wattage / Input	9W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anodized Aluminum Lens: Frosted Plexiglass
CCT	2700K, 3000K, 4000K
CRI	80
Delivered Lumens	684 lm (3000K)
Efficacy	76 lm/W
Optics	Diffuse
Finishes	White, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø3.94 x 3.94" h
Fixture Weight	1.68 lbs
LED Source	Power LED Matrix
Lumen Maintenance	L80, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	32°F to 113°F
IP Rating	IP40

Fixture Dimensions



ORDERING INFORMATION

Example: TK71105DB. Power Supplies ordered separately.

TK7110		D	
Model No.	CCT	Optics	Finish
TK7110 - 9W (350mA)	F - 2700K 5 - 3000K 9 - 4000K	D - Diffuse	B - White C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures 9W
PPLT00468	Phase Dim (120V Only)	120VAC to 500mA, 14W, Class 2	1-1
PPLT00263	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2, DAMP	1-2

Lutron Compatible Drivers


350mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures 9W
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 13W	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

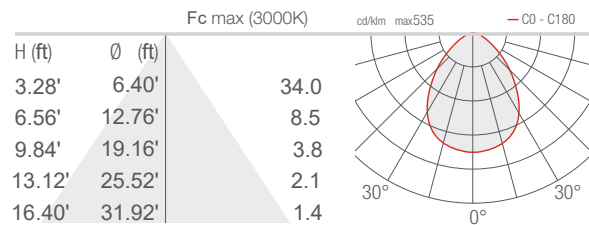D - Diffuse

Job Name/Date:

Fixture Type Designation: