




79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

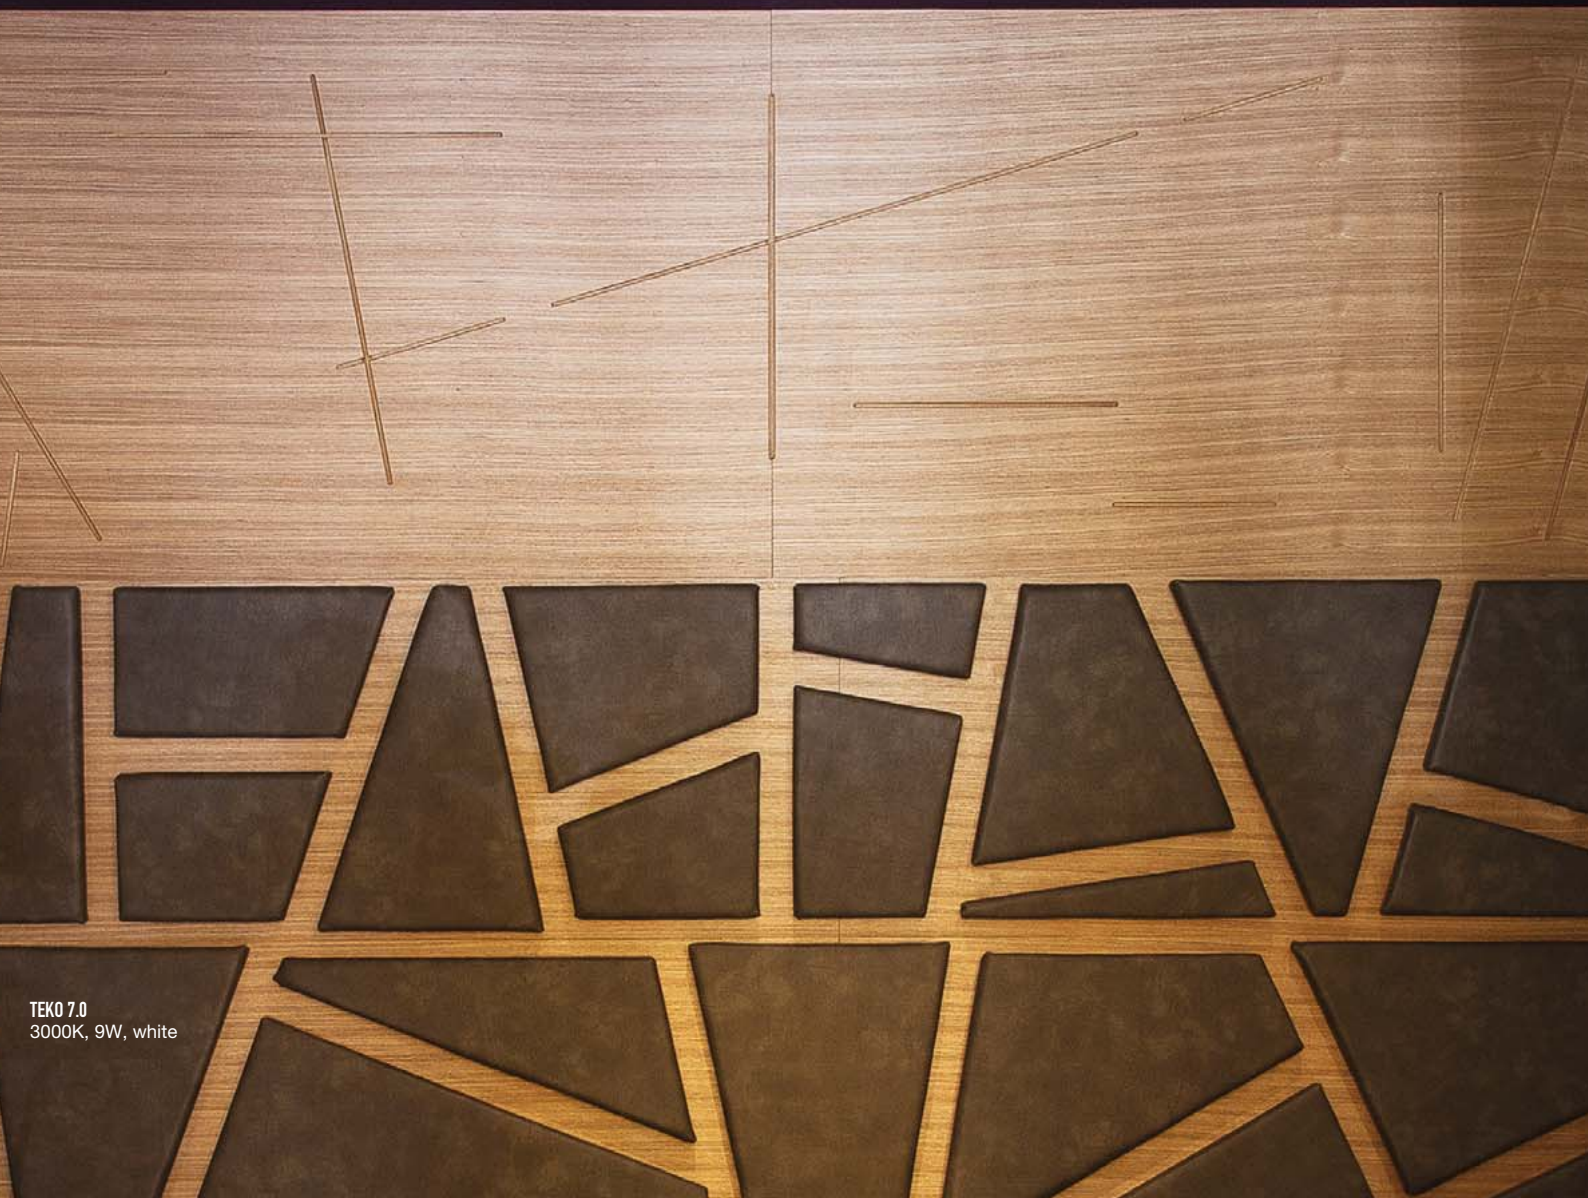

TEKO 7.0
3000K, 9W, white

TEKO

INDOOR CEILING MOUNTED
WITH DIFFUSE LIGHT



diffuse

2700K 3000K 4000K

SQUARE

ROUND

3.15 x 3.15 in



TEKO 5.0
5W 500mA
9W 350mA

Ø3.15 in



TEKO 5.1
5W 500mA
9W 350mA

3.94 x 3.94 in



TEKO 7.0
9W 350mA
17W 500mA

Ø3.94" in




TEKO 7.1
9W 350mA



TEKO



TEKO 5.0



TEKO 5.1




POWER // POWER SUPPLY MODEL NO.	5W 500mA TK5010 ■ D B White
	9W 350mA TK5011 ■ D B White
■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	460 lm (3000K, 5W) 826 lm (3000K, 9W)
DELIVERED LUMEN OUTPUT	330 lm (3000K, 5W) 590 lm (3000K, 9W)
NO. AND TYPE OF LED	power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	terminal block
MOUNTING	surface mounted (ceiling)

5W 500mA TK5110 ■ D B White	
	9W 350mA TK5111 ■ D B White
■ F - 2700K 5 - 3000K 9 - 4000K	
diffuse	
534 lm (3000K, 5W) 958 lm (3000K, 9W)	
382 lm (3000K, 5W) 684 lm (3000K, 9W)	
power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)	
body in anodized aluminum lens in one-side-frosted, transparent plexiglass	
remote power supply required, not included	
terminal block	
surface mounted (ceiling)	





TEKO 7.0



POWER // POWER SUPPLY MODEL NO.	9W 350mA TK7010 ■ D B White
	17W 500mA TK7011 ■ D B White
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	826 lm (3000K, 9W) 1565 lm (3000K, 17W)
DELIVERED LUMEN OUTPUT	590 lm (3000K, 9W) 1119 lm (3000K, 17W)
NO. AND TYPE OF LED	power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	terminal block
MOUNTING	surface mounted (ceiling)



TEKO 7.1



POWER // POWER SUPPLY MODEL NO.	9W 350mA TK7110 ■ D B White
	17W 500mA TK7111 ■ D B White
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	958 lm (3000K)
DELIVERED LUMEN OUTPUT	684 lm (3000K)
NO. AND TYPE OF LED	power LED matrix 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	terminal block
MOUNTING	surface mounted (ceiling)




TEKO

INDOOR CEILING MOUNTED


TEKO 5.0

D - Diffuse

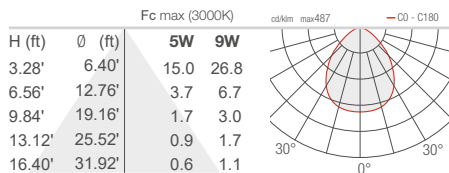


TEKO 5.1

D - Diffuse

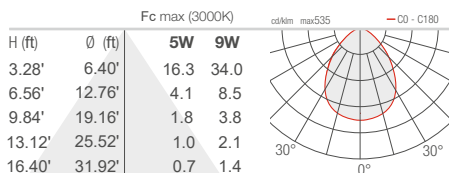

TEKO 7.0

D - Diffuse

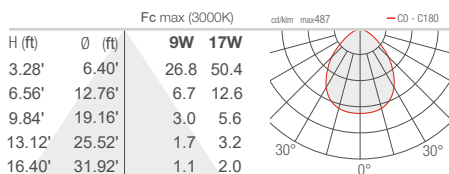

TEKO 7.1

D - Diffuse

