

# THE BOLLARD


The Bollard is a DurCoral®, IP65 rated, opaque black, outdoor bollard with a compact and minimal design. The pole height is customizable and the body can be decorated with any types of paintings in order to merge with all kinds of environments. It is available in 3000K as standard with a wide 70° light beam. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage / Input</b>	5W (500mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: DurCoral®
<b>CCT</b>	3000K (2700K - 4000K on request)
<b>BUG RATING</b>	B0-U1-G0
<b>CRI</b>	>80, >90 on request
<b>Delivered Lumens</b>	Coming Soon Dark Sky compliant, output below 80°
<b>Efficacy</b>	Coming Soon
<b>Optics</b>	70°
<b>Finishes</b>	DurCoral®
<b>Fixture Dimensions</b>	Head: 7.87" h x 3.15" w x 6.10" l Base Height: Customizable
<b>Fixture Weight</b>	13.23 lbs
<b>IP Rating</b>	IP65

Fixture Dimensions

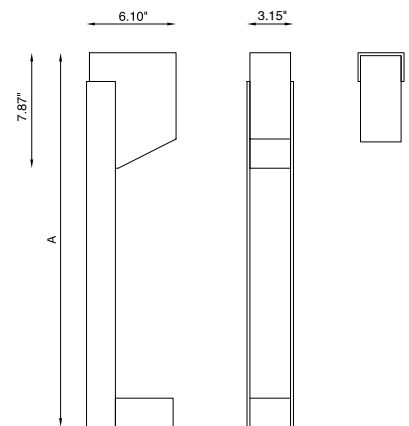

The body is made of DurCoral®, a high-performance “hi-tech” material born from the union of Coral® and cement. It is an aggregate twice as hard as concrete, which allows very high performances in terms of quality, flow and resistance and that, above all, differs from other outdoor materials, for the possibility of being treated with any type of paint and finish. Distinguished by the ability to resist abrasion, insensitive to ultraviolet rays, pollution and atmospheric agents is certainly the ideal material to be placed outdoors.

## ORDERING INFORMATION

Example: BU1731.DC.US

BU1731	DC	US
<b>Model No.</b>	<b>Finish</b>	
BU1731	DC - DurCoral®	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00154</a>	0-10V Dimming to 10%	120-277VAC to 500mA, 12W, Class 2	2-2
<a href="#">PPLT00469</a>	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	2-2
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-5
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-20

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00259</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	4-5

For other power supply options consult factory.

## PHOTOMETRIC DATA

All photometry is 3000K

Maximum Candela = 342.7

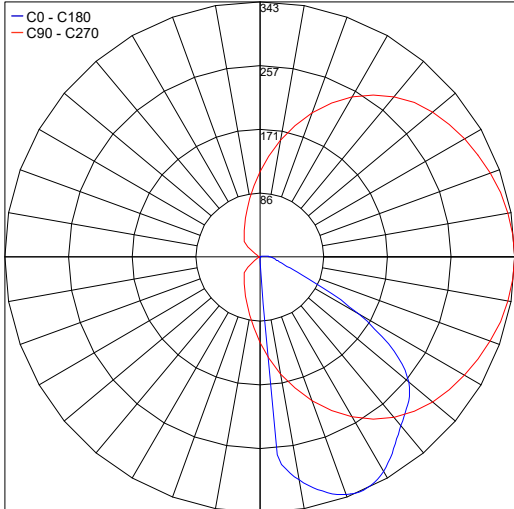

PHOTOMETRIC FILENAME : THE BOLLARD-BU1731.IES

Job Name/Date:

Fixture Type Designation: