



The Tube is an indoor suspended pendant with a sleek and minimal design. It has a diameter of only 0.59" making it extremely discrete and elegant in shape. Available in 3000K (2700K on request), and 5 standard finishes.

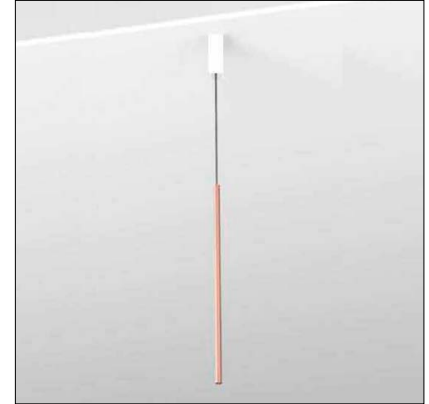

## TECHNICAL DATA

|                           |                                   |
|---------------------------|-----------------------------------|
| <b>Wattage / Input</b>    | 4.5W (350mA)                      |
| <b>Power Supply</b>       | Remote, not included. See page 2. |
| <b>Construction</b>       | Body: Aluminum                    |
| <b>CCT</b>                | 3000K (2700K on request)          |
| <b>CRI</b>                | >90                               |
| <b>LED Lumens</b>         | 360 lm (3000K)                    |
| <b>Efficacy</b>           | 80 lm/W (3000K)                   |
| <b>Optics</b>             | Narrow                            |
| <b>Finishes</b>           | 5 Standard, See Below             |
| <b>Fixture Dimensions</b> | Ø 0.6 x 19.7" l                   |
| <b>Cable Length</b>       | 4.92'                             |
| <b>Fixture Weight</b>     | 1.76 lbs                          |
| <b>IP Rating</b>          | IP40                              |

Fixture Dimensions

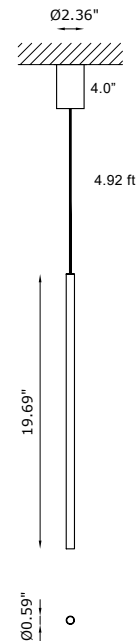

Does not require a J-Box

## ORDERING INFORMATION

Example: BU1131 WH 4 S 00 M 27 ND.US. Power supplies for remote ordered separately.

| BU1131    |  | 4 S 00          |  | .US |
|-----------|--|-----------------|--|-----|
| Model No. | Finish   | Optics          | CCT  |     |
| BU1131    | WH - White<br>BL - Black<br>CP - Chromed<br>A1 - Champagne<br>A2 - Rose Gold | 4 S 00 - Narrow | M 30 ND - 3000K (standard)<br>M 27 ND - 2700K (on request) | .US |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

| Part Number                 | Description           | Input/Output                       | Fixtures |
|-----------------------------|-----------------------|------------------------------------|----------|
| <a href="#">PPLT00466-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 350mA, 10W, Class 2  | 1-2      |
| <a href="#">PPLT00468</a>   | Phase Dim (120V Only) | 120VAC to 350mA, 14W, Class 2      | 2-3      |
| <a href="#">PPLT00308-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 30W, Class 2  | 1-4      |
| <a href="#">PPLT00168-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 350mA, 50W, Class 2  | 1-8      |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 100W, Class 2 | 1-16     |

## Suggested Lutron Compatible


| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| <a href="#">PPLT00247</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 7W, Class 2  | 1-1           |
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 2-2           |
| <a href="#">PPLT00179</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 19W, Class 2 | 4-4           |

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 109.8

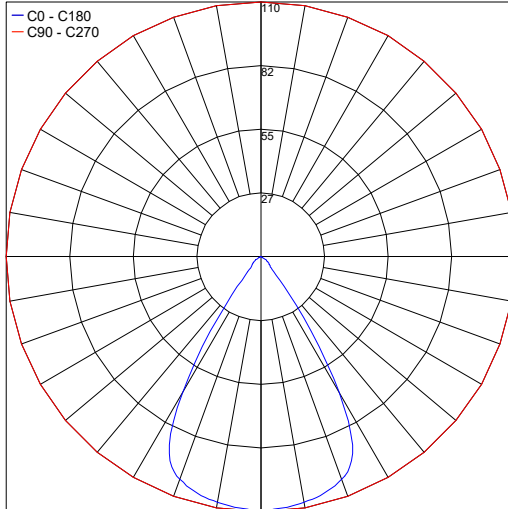

PHOTOMETRIC FILENAME : THE TUBE - BU1131.IES

Job Name/Date:

Fixture Type Designation: