


Tower is an outdoor bollard suitable for ground installation along public and private pathways. It is available in 3 heights, each with mono- or bi-light emission and diffused optics.

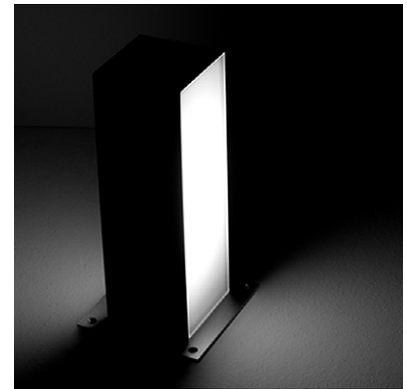

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	4W, 12W, 20W - Mono Emission 2 x 4W, 12W, 20W - Bi Emission
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Stainless Steel and Aluminum Lens: Extra-clear, Laminated Glass Cable Length: 3.28'
CCT	3000K, 4000K
BUG Rating	B0-U3-G1 (Tower 1 Bi) B1-U5-G1 (Tower 2 Bi) B1-U5-G1 (Tower 3 Bi)
Delivered Lumens	645 lm per beam (Tower 1 - 3000K) 1935 lm per beam (Tower 2- 3000K) 3225 lm per beam (Tower 3 - 3000K)
Efficacy	161.3 lm/W (3000K)
Optics	Diffuse
Finishes	5 Standard, See Below
Fixture Dimensions	3.94" x 3.94" x 12.40" h (Tower 1) 3.94" x 3.94" x 35.43" h (Tower 2) 3.94" x 3.94" x 59.06" h (Tower 3)
Color Consistency	<3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK10

ORDERING INFORMATION


Example: LM05.101214.US.03.AN.DI.BP. Accessories / Power Supplies ordered separately.

		DI	
Model No.	Finish	Optics	CCT
LM05.101211.US - Tower 1 Mono (4W)	01 - White	DI - Diffuse	BP - 3000K
LM05.101214.US - Tower 1 Bi (2 x 4W)	02 - Black		BF - 4000K
LM05.101212.US - Tower 2 Mono (12W)	03 - Gray		
LM05.101215.US - Tower 2 Bi (2 x 12W)	04 - Cor-ten		
LM05.101213.US - Tower 3 Mono (20W)	11 - Anthracite		
LM05.101216.US - Tower 3 Bi (2 x 20W)			


Job Name/Date:

Fixture Type Designation:


FIXTURE DIMENSIONS



Tower 1

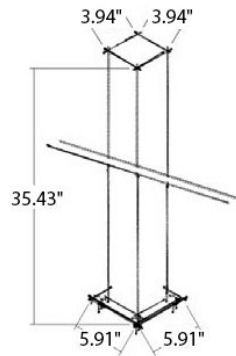

Tower 2

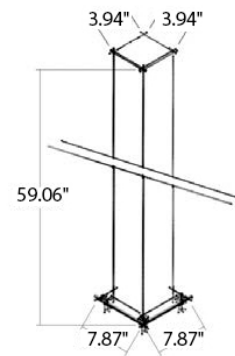

Tower 3

SUGGESTED POWER SUPPLIES

Remote 24VDC Driver in NEMA Enclosure - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures (Mono)		
			1	2	3
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-19	1-6	1-3

Part Number	Description	Input/Output	# of Fixtures (Bi)		
			1	2	3
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-9	1-3	1-1

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



LM20.100367


Anchor Plate - Tower 1-2
(5.91" x 5.91" x 5.12" h)

LM20.100368

Anchor Plate - Tower 3
(7.87" x 7.87" x 8.94" h)

PHOTOMETRIC DATA

Note: All photometric data is 3000K

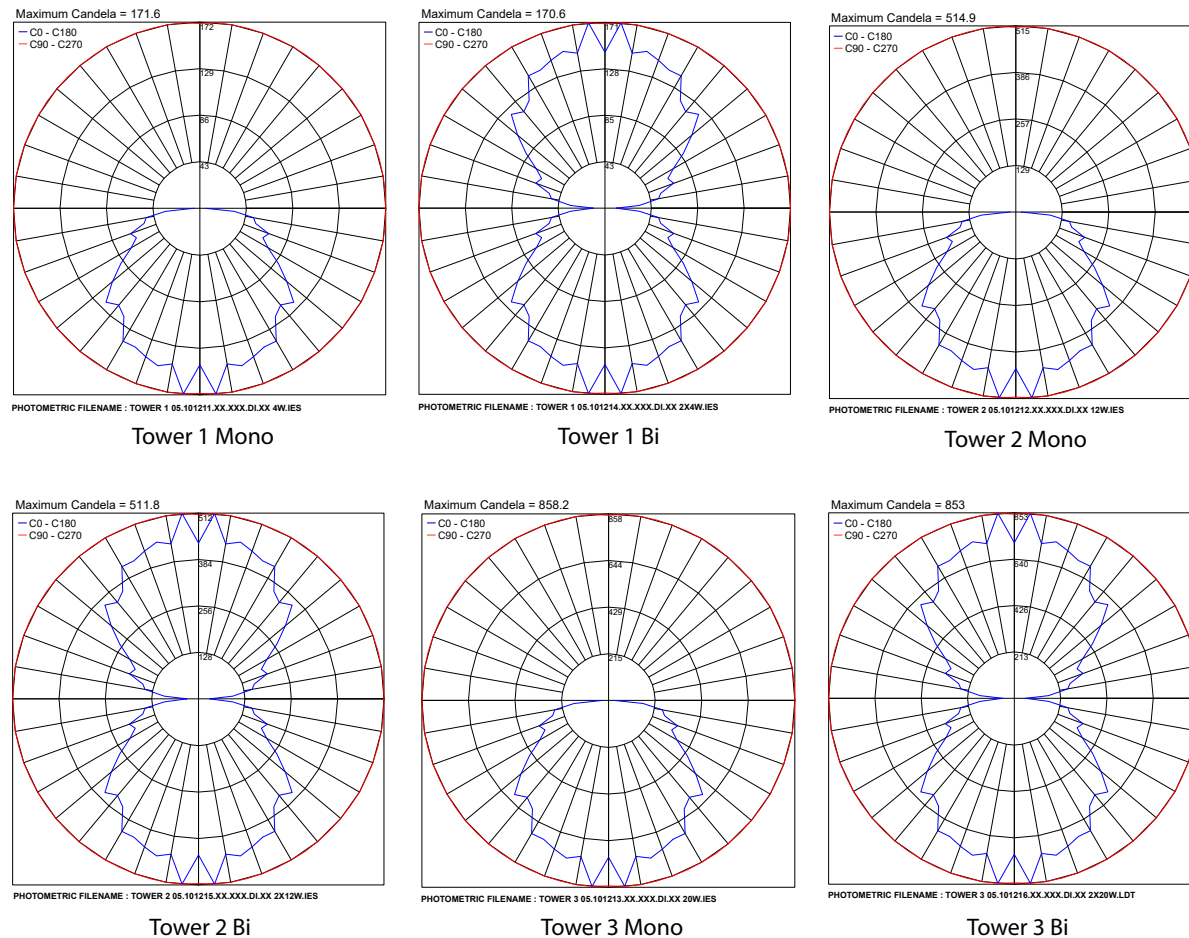

Job Name/Date:

Fixture Type Designation: