


TRITON COMPACT

Triton Compact is a surface or wall mounted linear profile luminaire that is vandal resistant and has a protection rating of IP65. It is available in 2 lengths, 3 color temperatures and 3 standard finishes.



MADE IN THE U.S.A.

Fixture Dimensions
(4 foot version)

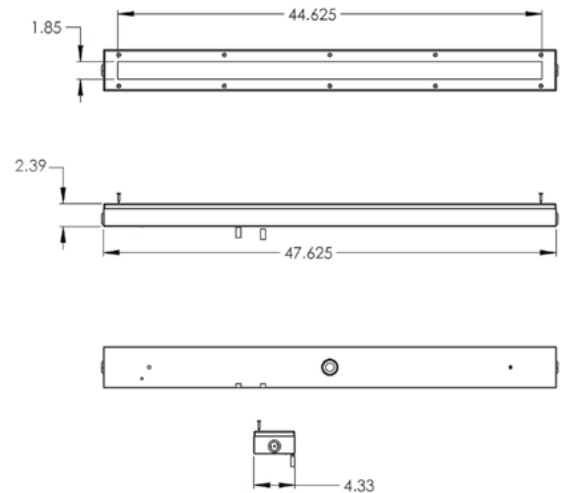

TECHNICAL DATA

Wattage / Input	7.5W per foot, per row (120-277VAC)
Power Supply	Integral (Dimming or Non-Dim Available)
Construction	Body: 18GA Powder Coated Galvanized Steel Frame Cover: 12GA Powder Coated Galvanized Steel Lens: 3/16" UV Stabilized Polycarbonate Screws: Vandal Reistant Stainless Steel
CCT	3000K, 3500K, 4000K
CRI	>90, >80
Delivered Lumens	1000 lm per foot, per row (3000K)
Efficacy	133.3 lm/W per foot, per row
Finishes	3 Standard, Custom RAL. See Below.
Fixture Dimensions	4.33" w x 47.63" l x 2.39" h (4 foot) 4.33" w x 24.96" l x 2.39" h (2 foot)
Aperature	1.85" x 44.63" (4 foot) 1.85" x 22.50" (2 foot)
IP Rating	IP65
IK Rating	IK10

ORDERING INFORMATION

Example: TCS-L-210-830-0-02-UNA-X-0.

TCS-L	-		-	0	-		-	X	-	
Model #	Length/Lumens	CCT	Body	Finish	Driver	Lens	Options			
TCS-L	210 - 2', 1 Row, 1000 lm/ft.	830 - 30K, >80	0 - Surface Mount	02 - Black Suede	UNA - No Dim 120-277VAC	X - Opal Polycarbonate	0 - None 1 - Emergency*			
	220 - 2', 2 Row, 2000 lm/ft.	835 - 35K, >80		11 - White Suede	U02 - 0-10V Dim 120-277VAC		*NOTE: Emergency only available on 410 model			
	410 - 4', 1 Row, 1000 lm/ft.	840 - 40K, >80	No Conduit Entries	03 - Gray						
	420 - 4', 2 Row, 2000 lm/ft.	930 - 30K, >90 935 - 35K, >90 940 - 40K, >90		99 - Custom						


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: Photometry is 4000K

Maximum Candela = 841.3

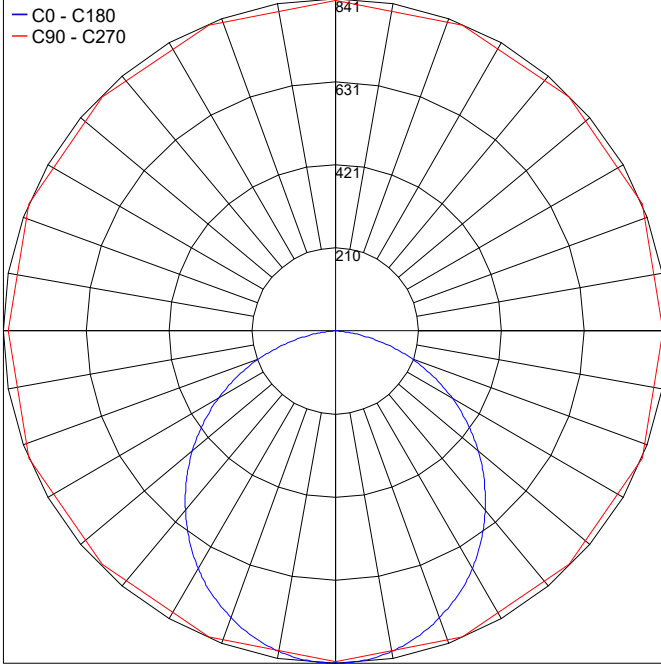

PHOTOMETRIC FILENAME : TCS-L-4-10-840.IES

Job Name/Date:

Fixture Type Designation: