

Triton Compact is a surface or wall mounted linear profile luminaire that is vandal resistant and has a protection rating of IP65. It is available in 2 lengths, 3 color temperatures and 3 standard finishes.


## TECHNICAL DATA

|                           |                                                                                                                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 7.5W per foot, per row (120-277VAC)                                                                                                                                                 |
| <b>Power Supply</b>       | Integral (Dimming or Non-Dim Available)                                                                                                                                             |
| <b>Construction</b>       | Body: 18GA Powder Coated Galvanized Steel<br>Frame Cover: 12GA Powder Coated Galvanized Steel<br>Lens: 3/16" UV Stabilized Polycarbonate<br>Screws: Vandal Reistant Stainless Steel |
| <b>CCT</b>                | 3000K, 3500K, 4000K                                                                                                                                                                 |
| <b>CRI</b>                | >90, >80                                                                                                                                                                            |
| <b>Delivered Lumens</b>   | 1000 lm per foot, per row (3000K)                                                                                                                                                   |
| <b>Efficacy</b>           | 133.3 lm/W per foot, per row                                                                                                                                                        |
| <b>Finishes</b>           | 3 Standard, Custom RAL. See Below.                                                                                                                                                  |
| <b>Fixture Dimensions</b> | 4.33" w x 47.63" l x 2.39" h (4 foot)<br>4.33" w x 24.96" l x 2.39" h (2 foot)                                                                                                      |
| <b>Aperature</b>          | 1.85" x 44.63" (4 foot)<br>1.85" x 22.50" (2 foot)                                                                                                                                  |
| <b>IP Rating</b>          | IP65                                                                                                                                                                                |
| <b>IK Rating</b>          | IK10                                                                                                                                                                                |



**MADE IN THE U.S.A.**

Fixture Dimensions  
(4 foot version)

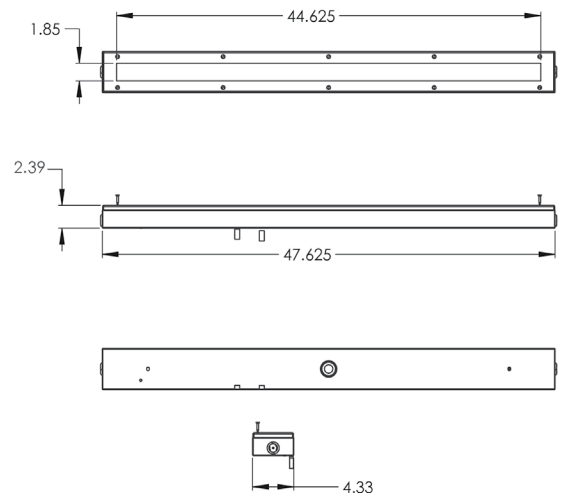

## ORDERING INFORMATION

Example: TCS-L-210-830-0-02-UNA-X-0.

| TCS-L   | -                            |                | -           |                  | -               | 0             | -                                                     |  | - |  | - | X | - |  |
|---------|------------------------------|----------------|-------------|------------------|-----------------|---------------|-------------------------------------------------------|--|---|--|---|---|---|--|
| Model # | Length/Lumens                | CCT            | Body        | Finish           | Driver          | Lens          | Options                                               |  |   |  |   |   |   |  |
| TCS-L   | 210 - 2', 1 Row, 1000 lm/ft. | 830 - 30K, >80 | 0 - Surface | 02 - Black Suede | UNA - No Dim    | X - Opal      | 0 - None                                              |  |   |  |   |   |   |  |
|         | 220 - 2', 2 Row, 2000 lm/ft. | 835 - 35K, >80 | Mount       | 11 - White Suede | 120-277VAC      | Polycarbonate | 1 - Emergency*                                        |  |   |  |   |   |   |  |
|         | 410 - 4', 1 Row, 1000 lm/ft. | 840 - 40K, >80 | No Conduit  | 03 - Gray        | U02 - 0-10V Dim |               | *NOTE:<br>Emergency only<br>available on<br>410 model |  |   |  |   |   |   |  |
|         | 420 - 4', 2 Row, 2000 lm/ft. | 930 - 30K, >90 | Entries     | 99 - Custom      | 120-277VAC      |               |                                                       |  |   |  |   |   |   |  |
|         |                              | 935 - 35K, >90 |             |                  |                 |               |                                                       |  |   |  |   |   |   |  |
|         |                              | 940 - 40K, >90 |             |                  |                 |               |                                                       |  |   |  |   |   |   |  |

\*NOTE:  
Emergency only  
available on  
410 model

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA

*Note: Photometry is 4000K*

Maximum Candela = 841.3

— C0 - C180  
— C90 - C270

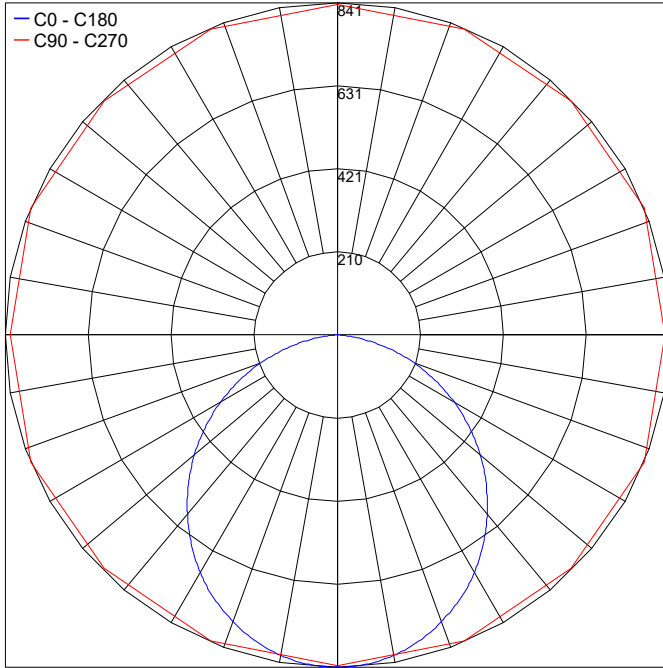

PHOTOMETRIC FILENAME : TCS-L-4-10-840.IES

Job Name/Date:

Fixture Type Designation: