


Turis is a family of recessed downlights perfect for general lighting. Featuring a simple, elegant square or round design, the Turis comes with diffuse optics that can be either flush or deep set.



## TECHNICAL DATA

<b>Wattage / Input</b>	15W, 22W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Black Anodized Aluminum EN AW 6082 Trim: Steel Lens: Plexiglass Frosted on One Side
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
<b>Efficacy</b>	87.5 lm/W (3000K, 15W) 79.5 lm/W (3000K, 22W)
<b>Optics</b>	Diffuse
<b>Finishes</b>	White, Black, Gray, Custom RAL
<b>Fixture Dimensions</b>	Ø5.04" x 4.13" h
<b>Cut-out Size</b>	Ø4.61"
<b>Fixture Weight</b>	1.54 lbs
<b>LED Source</b>	6 (15W), 8 (22W) Power LEDs
<b>Lumen Maintenance</b>	L80, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	32°F to +113°F
<b>IP Rating</b>	IP40, IP44 Installed
<b>IK Rating</b>	-

Cut-Out Dimensions: Ø4.61"  
Fixture Dimensions

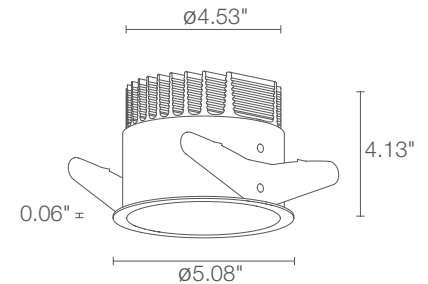

## ORDERING INFORMATION

Example: TU5101FDB. Power Supplies ordered separately.

TU510			D	
Model No.	Wattage	CCT	Optics	Finish
TU510	1 - 15W 0 - 22W	F - 2700K 5 - 3000K 9 - 4000K	D - Diffuse	B - White N - Black G - Gray C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures	
			15W / 22W	
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1	N/A
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-1	1-1
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-1	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-4	1-4

## Suggested Lutron Compatible - 15W


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-1

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

**D** - Diffuse

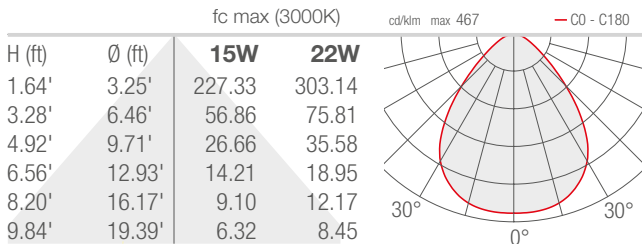

Job Name/Date:

Fixture Type Designation: