

# TURIS MINI 1.1


Turis is a family of recessed downlights perfect for general lighting. Featuring a simple, elegant square or round design, the Turis comes with diffuse optics that can be either flush or deep set.



## TECHNICAL DATA

<b>Wattage / Input</b>	4.5W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Black Anodized Aluminum EN AW 6082 Trim: Steel Lens: Plexiglass Frosted on One Side
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	310 lm (3000K)
<b>Efficacy</b>	68.9 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	White, Chrome, Custom RAL (see below)
<b>Fixture Dimensions</b>	Ø1.73" x 2.87" h
<b>Cut-out Size</b>	Ø1.57"
<b>Fixture Weight</b>	0.33 lbs
<b>LED Source</b>	1 Multichip Power LED
<b>Lumen Maintenance</b>	L80, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	32°F to +113°F
<b>IP Rating</b>	IP40, IP44 Installed
<b>IK Rating</b>	-

Cut-Out Dimensions: 1.46" x 1.46"  
Fixture Dimensions



## ORDERING INFORMATION

Example: MT1101FDB. Accessories / Power Supplies ordered separately.

MT1101		D	
Model No.	CCT	Optics	Finish
MT1101	F - 2700K 5 - 3000K 9 - 4000K	D - Diffuse	B - White CH - Chrome C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00128</a>	Non-Dim	120VAC to 24VDC, 6W, Class 2, IP65	1-1
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-2
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-4
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-7
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-17

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-7
<a href="#">PPLT00530</a>	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-17

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

### D - Diffuse

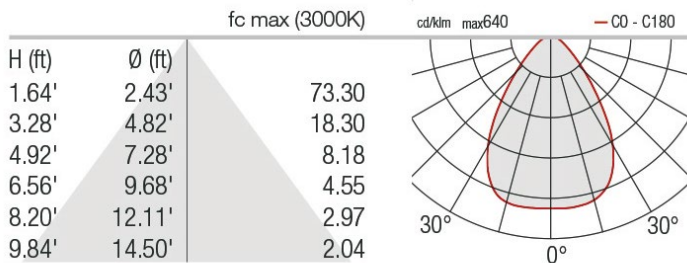

Job Name/Date:

Fixture Type Designation: