

INDOOR RECESSED DOWNLIGHTS GENERAL LIGHT FOR PRIVATE HOMES



diffuse



2700K 3000K 4000K

4.5W
24VDC

5.5W/11W
500mA/350mA
ON/OFF
0/1-10V

11W/15W
350mA
ON/OFF
0/1-10V

15W/22W
350mA
ON/OFF
0/1-10V

ROUND COVER



TURIS MINI 1.1
Ø1.73 in




TURIS 1.1
Ø2.44 in



TURIS 3.1
Ø3.94 in



TURIS 5.1
Ø5.06 in



TURIS 1.3
Ø2.44 in



TURIS 3.3
Ø3.94 in

SQUARE COVER



TURIS MINI 1.0
1.65x1.65 in




TURIS 1.0
2.40x2.40 in



TURIS 3.0
3.82x3.82 in



TURIS 5.0
5.24x5.24 in



TURIS 1.2
2.40x2.40 in



TURIS 3.2
3.82x3.82 in




TURIS 2.0
2.76x2.76 in



TURIS 4.0
3.70x3.70 in



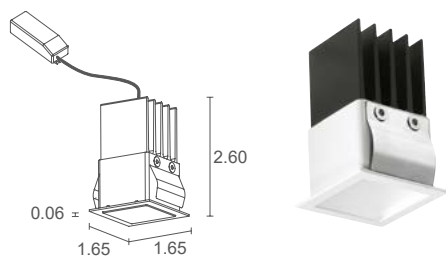

TURIS MINI 1.0

5.51x5.51 in
H 4.72 in

1.46x1.46 in

LED 24VDC 0.33 lbs IP40

CASAMBI

POWER / MODEL CODE

5.5W 24VDC
MT1011 **D B** White

4.5W 24VDC
MT1001 **D B** White


LED COLOR

F - 2700K
5 - 3000K
9 - 4000K
RGB on request

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE	460 lm (3000K)
DELIVERED LUMEN OUTPUT	295 lm (3000K)
NO. AND TYPE OF LED	1 multichip power LED 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	24VDC: includes 4.92 ft PVC cable FROR 2x0.35/0.35 Ø0.14 in
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	24VDC: dimmable with remote PSU CRI >90

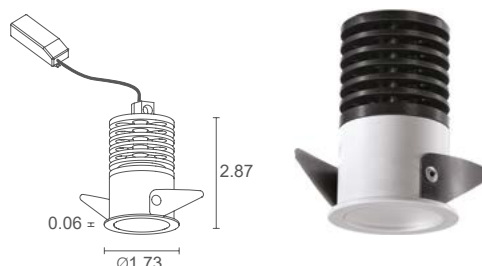

TURIS MINI 1.1

Ø 5.51 in
H 4.72 in

1.57 in

LED 24VDC 0.33 lbs IP40

CASAMBI

5.5W 24VDC

MT1111 **D B** White
MT1111 **D C** Chrome

4.5W 24VDC

MT1101 **D B** White
MT1101 **D C** Chrome

F - 2700K
5 - 3000K
9 - 4000K
RGB on request

diffuse

LUMEN OUTPUT AT SOURCE	460 lm (3000K)
DELIVERED LUMEN OUTPUT	310 lm (3000K)
NO. AND TYPE OF LED	1 multichip power LED 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	24VDC: includes 4.92 ft PVC cable FROR 2x0.35/0.35 Ø0.14 in
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	24VDC: dimmable with remote PSU CRI >90




< TURIS MINI 1.1 3000K, 5.5W, chrome

Project by / Studio di Architettura Andrea Abbadessa,
ing. Ignazio Stancanelli, ing. Giuseppe Malatino
Light planning by / Light Style
Maniace-Ortigia, Syracuse, Italy



Designplan | L&L Luce&Light

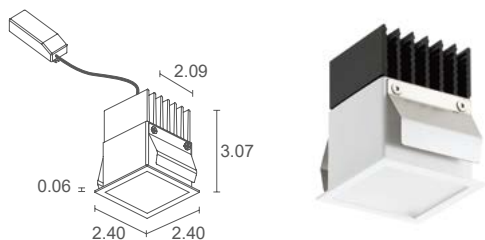

TURIS 1.0

5.51x5.51 in
H 5.12 in

2.20x2.20 in

CB 0.82 lbs IP40
Remote

POWER / MODEL CODE

500mA (5.5W) / 350mA (11W)
TU101 **D B** White
TU101 **D N** Black
TU101 **D G** Grey



TURIS 1.1

Ø 5.12 in
H 5.12 in

Ø 2.24 in

CB 0.73 lbs IP40
Remote

500mA (5.5W) / 350mA (11W)
TU110 **D B** White
TU110 **D N** Black
TU110 **D G** Grey


POWER	1 - 5.5W 0 - 11W
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K RGB on request
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
DELIVERED LUMEN OUTPUT	295 lm (3000K, 5.5W) 1003 lm (3000K, 11W)
NO. AND TYPE OF LED	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL

POWER	1 - 5.5W 0 - 11W
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K RGB on request
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
DELIVERED LUMEN OUTPUT	310 lm (3000K, 5.5W) 944 lm (3000K, 11W)
NO. AND TYPE OF LED	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL



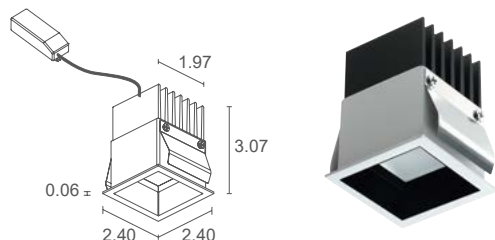


TURIS 1.2

5.51x5.51 in
H 5.12 in 2.20x2.20 in

CB 0.82 lbs IP40
Remote

500mA (5.5W) / 350mA (11W)

TU121 **D B** White
TU121 **D N** Black
TU121 **D G** Grey

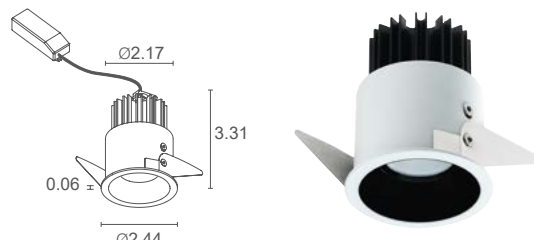

TURIS 1.3

Ø 5.12 in
H 5.12 in Ø 2.24 in

CB 0.82 lbs IP40
Remote

500mA (5.5W) / 350mA (11W)

TU131 **D B** White
TU131 **D N** Black
TU131 **D G** Grey

	1 - 5.5W 0 - 11W
	F - 2700K 5 - 3000K 9 - 4000K RGB on request
diffuse	

644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
303 lm (3000K, 5.5W) 631 lm (3000K, 11W)
1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
remote power supply required, not included
includes 0.98 ft cable
recessed (ceiling)
see accessories page
CRI >90
available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL

	1 - 5.5W 0 - 11W
	F - 2700K 5 - 3000K 9 - 4000K RGB on request
diffuse	


644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
302 lm (3000K, 5.5W) 629 lm (3000K, 11W)
1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
remote power supply required, not included
includes 0.98 ft cable
recessed (ceiling)
see accessories page
CRI >90
available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL









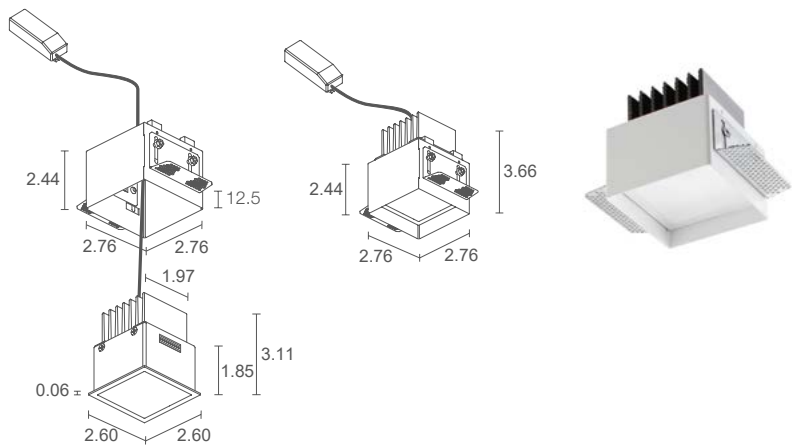

Required outer casing, not included

TURIS 2.0

5.91x5.91 in
H 5.51 in

2.76x2.76 in

CB ENEC   0.66 lbs IP40

Remote


POWER / MODEL CODE 500mA (5.5W) / 350mA (11W)
TU201   **D B**

 POWER	1 - 5.5W 0 - 11W
 LED COLOR	F - 2700K 5 - 3000K 9 - 4000K RGB on request
OPTICS	diffuse
LUMEN OUTPUT AT SOURCE	644 lm (3000K, 5.5W) 1251 lm (3000K, 11W)
DELIVERED LUMEN OUTPUT	295 lm (3000K, 5.5W) 1003 lm (3000K, 11W)
NO. AND TYPE OF LED	1 power LED (5.5W version) 4 power LEDs (11W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL

< **TURIS 1.0**
3000K, 11W, white

Light planning by / Imat Felco Como
Executed by / Punto Luce di Simonetti Wimmer
Photo by / Alessio Tamborini
Private residence, Como, Italy



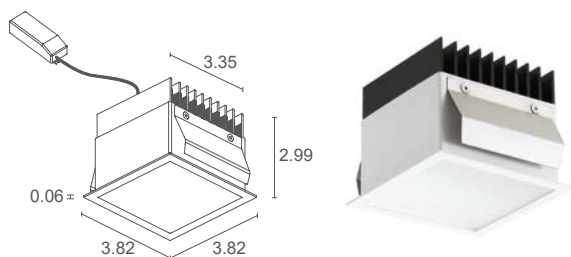

TURIS 3.0


6.69x6.69 in
H 5.12 in

3.54x3.54 in

CB 1.57 lbs IP40
Remote

POWER / MODEL CODE

350mA
TU301 **D B** White
TU301 **D N** Black
TU301 **D G** Grey

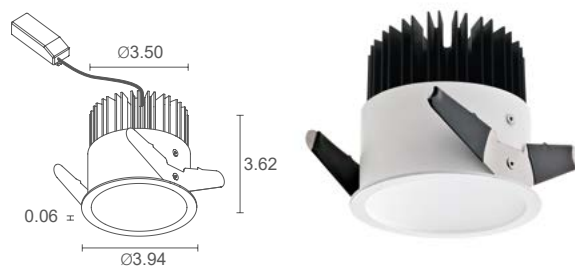

TURIS 3.1

Ø 7.48 in
H 6.30 in

Ø 3.54 in

CB 1.48 lbs IP40
Remote

350mA
TU310 **D B** White
TU310 **D N** Black
TU310 **D G** Grey



POWER	1 - 11W 0 - 15W
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
DELIVERED LUMEN OUTPUT	975 lm (3000K, 11W) 1463 lm (3000K, 15W)
NO. AND TYPE OF LED	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL

POWER	1 - 11W 0 - 15W
LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
DELIVERED LUMEN OUTPUT	954 lm (3000K, 11W) 1431 lm (3000K, 15W)
NO. AND TYPE OF LED	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL



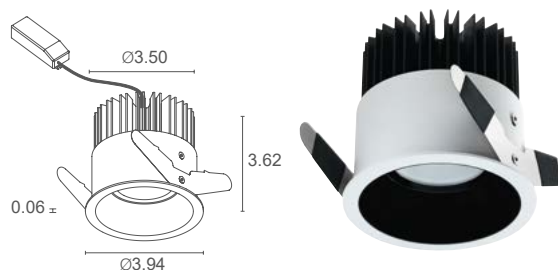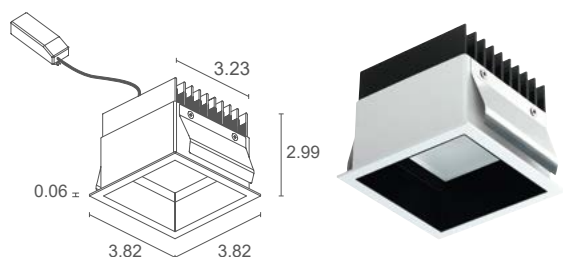

TURIS 3.2

6.69x6.69 in
H 5.12 in 3.54x3.54 in

CB 1.57 lbs IP40
Remote

350mA

TU321 **D B** White
TU321 **D N** Black
TU321 **D G** Grey

TURIS 3.3

Ø 7.48 in
H 6.30 in Ø 3.54 in

CB 1.48 lbs IP40
Remote

350mA

TU331 **D B** White
TU331 **D N** Black
TU331 **D G** Grey

	1 - 11W 0 - 15W
	F - 2700K 5 - 3000K 9 - 4000K

diffuse

1251 lm (3000K, 11W)
1870 lm (3000K, 15W)

755 lm (3000K, 11W)
1117 lm (3000K, 15W)

4 power LEDs (11W version)
6 power LEDs (15W version)
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel
lens in one-side-frosted, transparent plexiglass

remote power supply required, not included

includes 0.98 ft cable

recessed (ceiling)

see accessories page

CRI >90

Casambi-compatible version, controllable with the Casambi app, available on request

	1 - 11W 0 - 15W
	F - 2700K 5 - 3000K 9 - 4000K

diffuse

1251 lm (3000K, 11W)
1870 lm (3000K, 15W)

784 lm (3000K, 11W)
1160 lm (3000K, 15W)

4 power LEDs (11W version)
6 power LEDs (15W version)
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel
lens in one-side-frosted, transparent plexiglass

remote power supply required, not included

includes 0.98 ft cable


recessed (ceiling)

see accessories page

CRI >90

Casambi-compatible version, controllable with the Casambi app, available on request



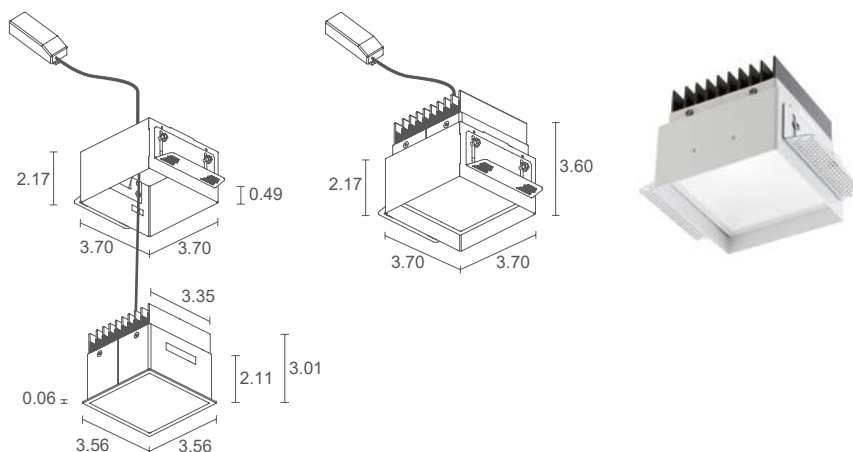

Required outer casing, not included

TURIS 4.0

7.09x7.09 in
H 5.51 in

3.74x3.74 in

CB



1.10 lbs

IP40

Remote

POWER / MODEL CODE



350mA (11W) / 500mA (15W)
TU401 ■ ■ **D B**

■ POWER	1 - 11W 0 - 15W
■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1251 lm (3000K, 11W) 1870 lm (3000K, 15W)
DELIVERED LUMEN OUTPUT	975 lm (3000K, 11W) 1463 lm (3000K, 15W)
NO. AND TYPE OF LED	4 power LEDs (11W version) 6 power LEDs (15W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel lens in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL



Designplan | L&L Luce&Light



TURIS 5.0

7.87x7.87 in
H 5.12 in

4.92x4.92 in

CB 2.31 lbs IP40
 Remote

POWER / MODEL CODE

350mA
TU501 **D B** White
TU501 **D N** Black
TU501 **D G** Grey

TURIS 5.1

Ø 8.66 in
H 6.30 in

Ø 4.61 in

CB 1.54 lbs IP40
 Remote

350mA
TU510 **D B** White
TU510 **D N** Black
TU510 **D G** Grey


POWER	1 - 15W 0 - 22W
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse

LUMEN OUTPUT AT SOURCE	1870 lm (3000K, 15W) 2231 lm (3000K, 22W)
DELIVERED LUMEN OUTPUT	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
NO. AND TYPE OF LED	6 power LEDs (15W version) 8 power LEDs (22W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel; screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL

POWER	1 - 15W 0 - 22W
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	diffuse


LUMEN OUTPUT AT SOURCE	1870 lm (3000K, 15W) 2231 lm (3000K, 22W)
DELIVERED LUMEN OUTPUT	1312 lm (3000K, 15W) 1750 lm (3000K, 22W)
NO. AND TYPE OF LED	6 power LEDs (15W version) 8 power LEDs (22W version) 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized aluminum trim in steel screen in one-side-frosted, transparent plexiglass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft cable
MOUNTING	recessed (ceiling)
FEATURES	CRI >90
NOTES	available on request: Casambi-compatible version, controllable with the Casambi app, and version certified ETL



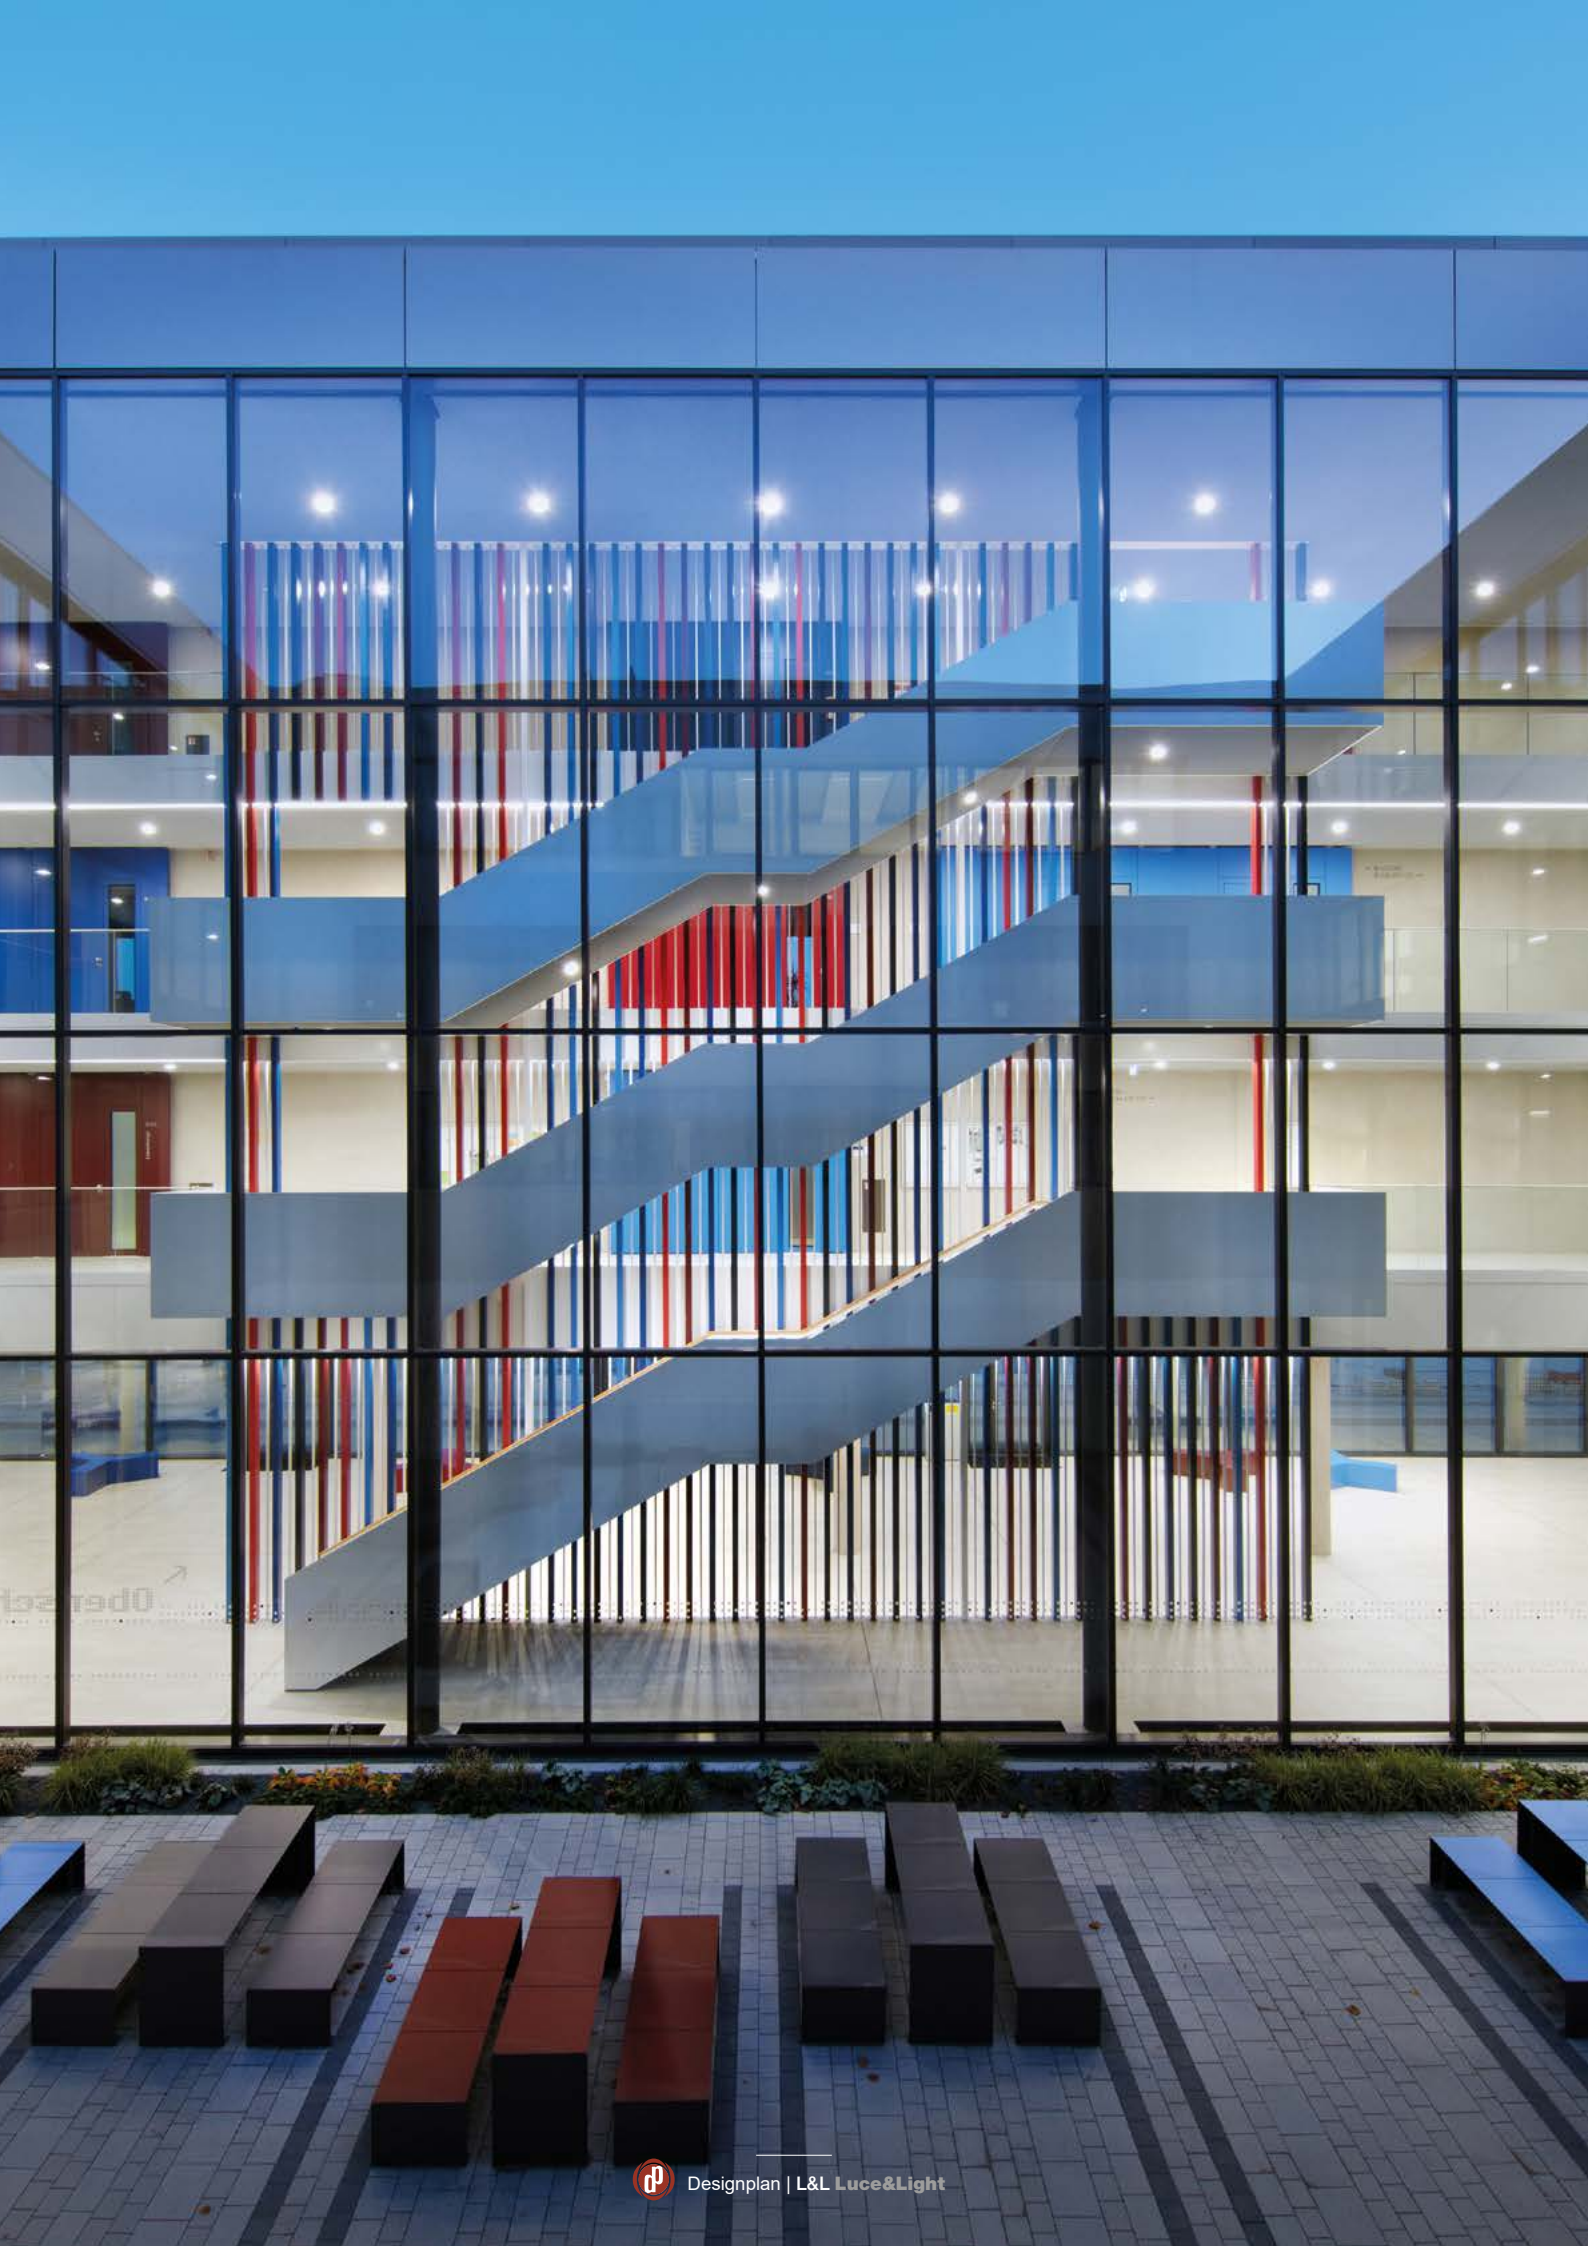


ACCESSORIES

ACCESSORIES FOR INSTALLATION




WC3107

Outer casing for solid walls
(Turis Mini 1.0)




WC3108

Outer casing for solid walls
(Turis Mini 1.1)



WC3101

Outer casing for solid walls
(Turis 1.0 / 1.2)



WC3105

Outer casing for solid walls
(Turis 1.1 / 1.3)



WC3103

Outer casing for solid walls
(Turis 3.0 / 3.2)



WC3106

Outer casing for solid walls
(Turis 3.1 / 3.3)



WC3102

Outer casing for plasterboard
(Turis 2.0)



WC3104

Outer casing for plasterboard
(Turis 4.0)

< TURIS 3.0

4000K, 15W, white

Project by / ARGE DD-TOL
AB Raum und Bau GmbH,
AB Fuchs und Rudolph,
AGZ Zimmermann, Arch. GmbH
Contractor / STESAD GmbH
Photo by / Robert Gommlich
Gymnasium Tolkewitz, Dresden, Germany




Designplan | L&L Luce&Light

TURIS

INDOOR RECESSED


TURIS MINI 1.0

D - Diffuse

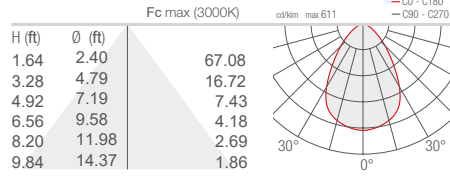


TURIS MINI 1.1

D - Diffuse

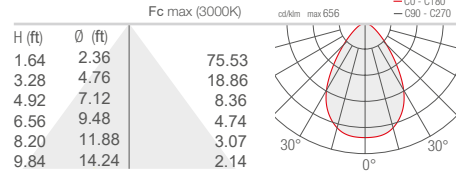


TURIS 1.0 2.0

D - Diffuse

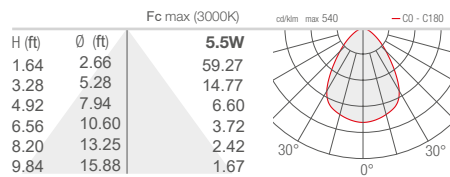


D - Diffuse

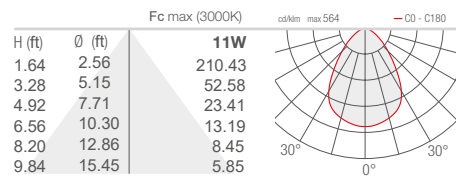


TURIS 1.1

D - Diffuse

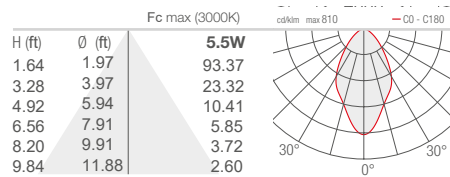


D - Diffuse

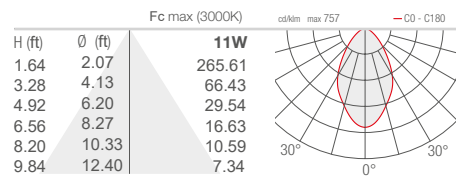


TURIS 1.2

D - Diffuse

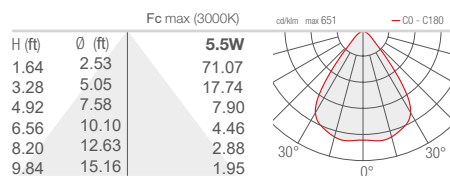


D - Diffuse

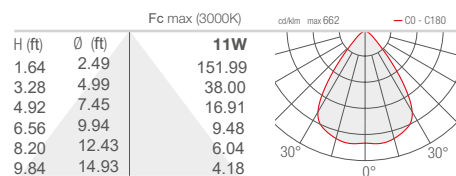


TURIS 1.3

D - Diffuse

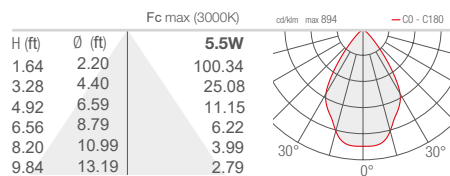


D - Diffuse

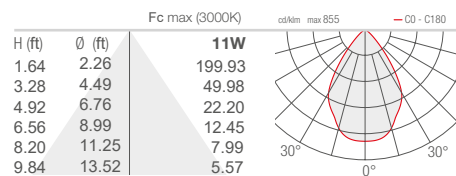


TURIS 3.0 4.0

D - Diffuse

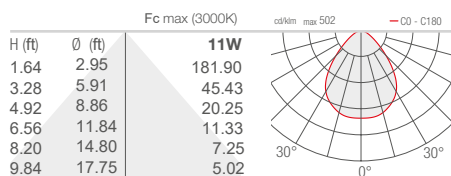


D - Diffuse

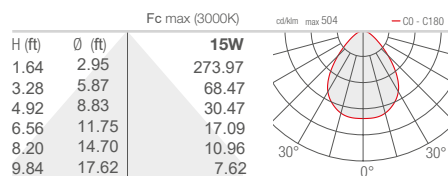


TURIS 3.1

D - Diffuse

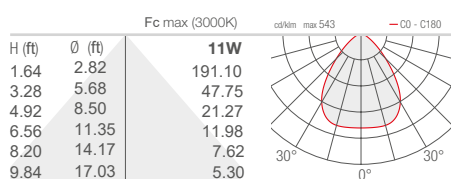


D - Diffuse

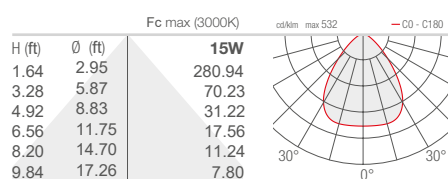


TURIS 3.2

D - Diffuse

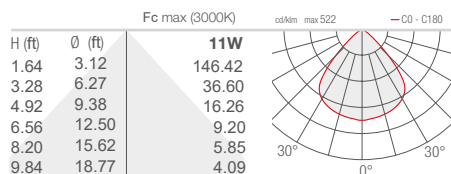


D - Diffuse

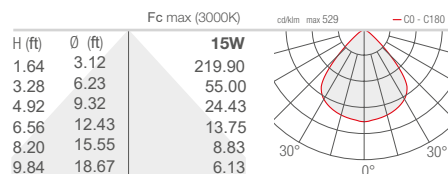


TURIS 3.3

D - Diffuse

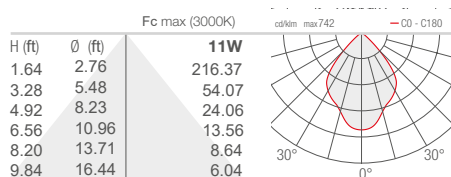


D - Diffuse

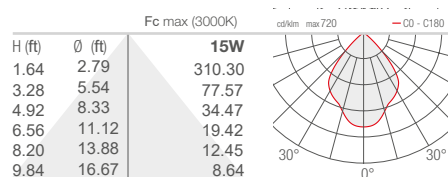

TURIS 5.0 5.1

D - Diffuse

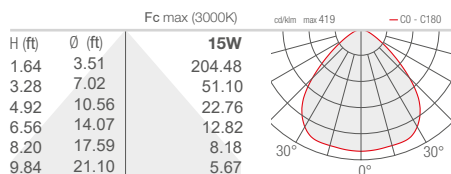

D - Diffuse

