



The Underline Series is a walkover luminaire made of DurCoral® a material three times stronger than concrete and perfect for exterior environments. It is meant to sit flush with other tiles, pavers, or other flooring materials as well as within grassy areas.

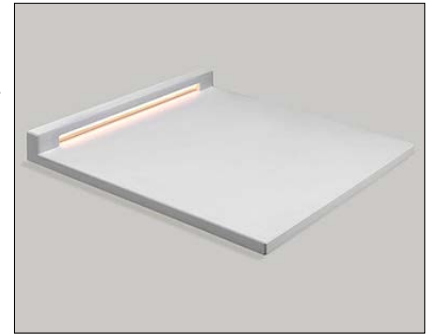

## TECHNICAL DATA

<b>Wattage / Input</b>	5.5W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: DurCoral®
<b>CCT</b>	3000K
<b>CRI</b>	>90
<b>LED Lumens</b>	220 lm (3000K)
<b>Efficacy</b>	40 lm/W
<b>Optics</b>	120°
<b>Finishes</b>	Unfinished
<b>Aperture</b>	15.75" x 0.59"
<b>Fixture Dimensions</b>	19.69" l x 19.69" w x 1.57" h (tile is 0.79" h)
<b>Fixture Weight</b>	24.25 lbs
<b>IP Rating</b>	IP68
<b>Impact Rating</b>	-

Fixture Dimensions  
19.69" l x 19.69" w x 1.57" total height  
(tile is 0.79" h)

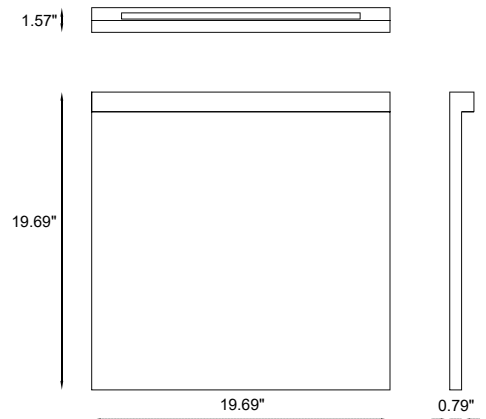

The body is made of DurCoral®, a high-performance “hi-tech” material born from the union of Coral® and cement. It is an aggregate twice as hard as concrete, which allows very high performances in terms of quality, flow and resistance and that, above all, differs from other outdoor materials, for the possibility of being treated with any type of paint and finish. Distinguished by the ability to resist abrasion, insensitive to ultraviolet rays, pollution and atmospheric agents is certainly the ideal material to be placed outdoors.

## ORDERING INFORMATION

Example: BU1741.DC.US. Power Supplies ordered separately.

BU1741.DC.US

**Model No.**  
BU1741.DC.US

Product Code:

Job Name/Date:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-14
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-14

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3D0E / L3D03W	L3D0	100%-0.1%	Hi-Lume™ 1% EcoSystem™ / 3-Wire Fade to Black LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-14

## DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures 5.5W
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-13

For other power supply options consult factory.

Product Code:

Job Name/Date: