


Underscore is an inground outdoor luminaire made of DurCoral® - a material three times stronger than concrete - that can be installed at varying heights (max 7.87" - min. 3.15"). With an ingress protection rating of IP68, it provides impeccable mechanical resistance to humidity and external agents.



## TECHNICAL DATA

<b>Wattage / Input</b>	5.5W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: DurCoral®
<b>CCT</b>	3000K
<b>CRI</b>	>90
<b>LED Lumens</b>	220 lm (3000K)
<b>Efficacy</b>	40 lm/W
<b>Optics</b>	120°
<b>Finishes</b>	Unfinished
<b>Aperture</b>	15.75" x 0.59"
<b>Fixture Dimensions</b>	19.69" l x 5.91" w x 7.87" h
<b>Fixture Weight</b>	24.25 lbs
<b>IP Rating</b>	IP68
<b>Impact Rating</b>	-

Fixture Dimensions  
19.69" l x 5.91" w x 7.87" h

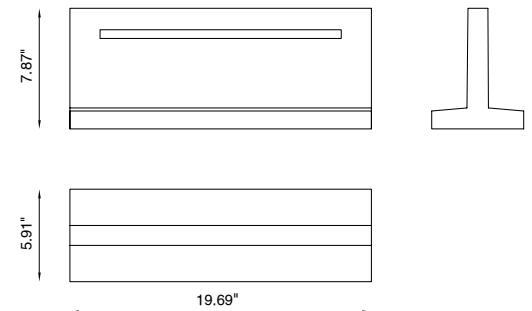

The body is made of DurCoral®, a high-performance "hi-tech" material born from the union of Coral® and cement. It is an aggregate twice as hard as concrete, which allows very high performances in terms of quality, flow and resistance and that, above all, differs from other outdoor materials, for the possibility of being treated with any type of paint and finish. Distinguished by the ability to resist abrasion, insensitive to ultraviolet rays, pollution and atmospheric agents is certainly the ideal material to be placed outdoors.

Installation can be 7.87" high when placed on the surface, or can be vertically extended by 3.15", when the device is underground.



## ORDERING INFORMATION

Example: BU1751.DC.US. Power Supplies ordered separately.

BU1751.DC.US

Model No.

BU1751.DC.US

Product Code:

Job Name/Date:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00481</a>	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-3
<a href="#">PPLT00599</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-13
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-14
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-14

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3D0E / L3D03W	L3D0	100%-0.1%	Hi-Lume™ 1% EcoSystem™ / 3-Wire Fade to Black LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-14

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 74.1

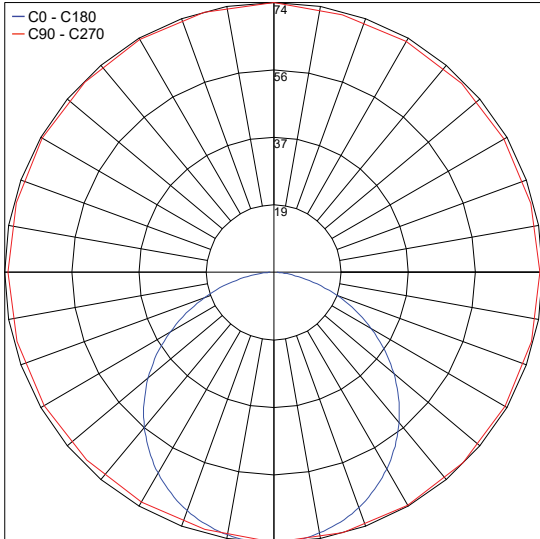

PHOTOMETRIC FILENAME : UNDERScore BU1751.DC.US.IES

Product Code:

Job Name/Date: