


A totally recessed fixture made of AirCoral®, Unleaf is installable on plasterboard or brick walls and ceilings. The product surface sinks into the wall and offers a wide beam light distribution.



Ceiling Cut-Out: 18.1" x 18.1"

Fixture Dimensions:

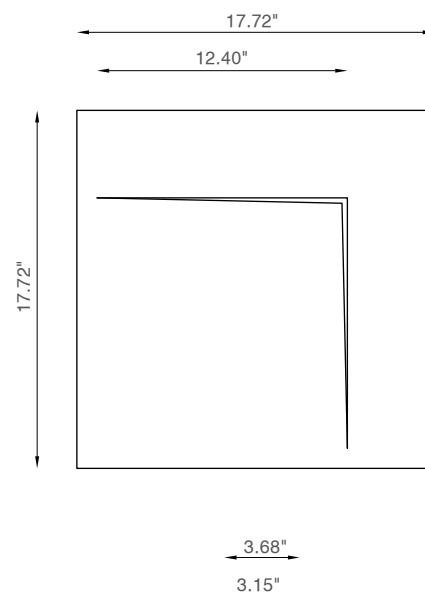

## TECHNICAL DATA

<b>Wattage / Input</b>	2 x 6.5W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: AirCoral®
<b>CCT</b>	3000K (2700K, 4000K on request, consult factory)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	315 lm per beam (3000K)
<b>Efficacy</b>	48 lm/W (3000K)
<b>Optics</b>	120° wide beam
<b>Finishes</b>	Unfinished
<b>Cut-Out Dimensions</b>	18.1" x 18.1"
<b>Fixture Dimensions</b>	17.72" l x 17.72" w x 12.40"
<b>Fixture Weight</b>	22.93 lbs
<b>IP Rating</b>	IP20

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

## ORDERING INFORMATION

Example: BU2998.30.AC.US. Power Supplies ordered separately.

<b>BU2998.</b>	<b>AC.US</b>
<b>Model No.</b>	
<b>BU2998</b> (3000K standard) (2700K, 4000K on request)	<b>AC.US - AirCoral</b>

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

350mA

Part Number	Description	Input/Output	Fixtures
<a href="#">PPLT00468</a>	Phase Dim (120V Only)	120VAC to 350mA 14W, Class 2	1-2
<a href="#">PPLT00480-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-3
<a href="#">PPLT00263</a>	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-3
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-3

**Suggested Lutron Compatible Drivers**

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	Fixtures
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 7W	1-1
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 13W	1-2
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	2-2


For other power supply options consult factory.

**PHOTOMETRIC DATA**

All photometry is 3000K

Maximum Candela = 84.6

— C0 - C180  
— C90 - C270

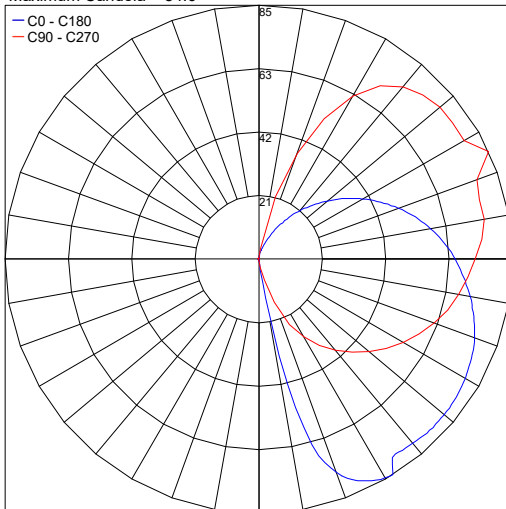

PHOTOMETRIC FILENAME : UNLEAF - BU2998.IES

Job Name/Date:

Fixture Type Designation: