


# UNLEAF

A LIGHT CUT ON THE WALL



## Unleaf

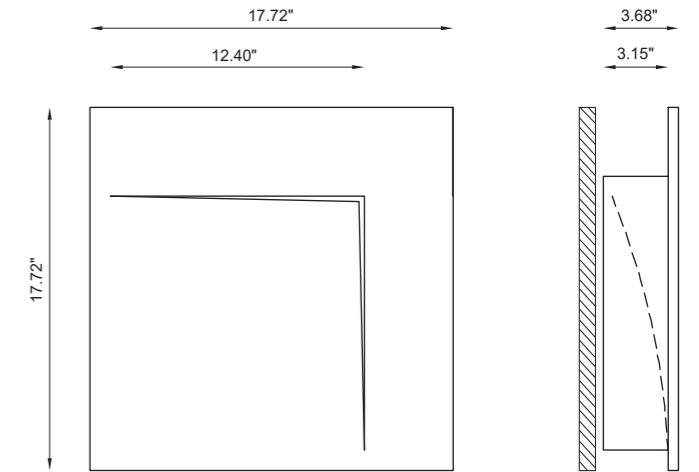

### OTHER AVAILABLE CODES

BU2998.27.AC	<i>lens</i>	120°
	<i>light color</i>	2700K
BU2998.40.AC	<i>lens</i>	120°
	<i>light color</i>	4000K (on request)
BU2998.AC 2 00 M	<i>lens</i>	120°
	<i>light color</i>	
	<b>27</b>	2700K
	<b>30</b>	3000K
	<b>40</b>	4000K (on request)

example of code composition

BU2998.AC 2 00 M 30

### TECHNICAL FEATURES

Code	BU2998.AC
Type	Wall and ceiling recessed
Material	AC: AirCoral®
Absorption capacity*	245.42 ft²
Weight	22.93 lbs
Mounting	Wall and ceiling mounting
IP rating	IP20
Control gear	Dimmable constant current driver (included)
Cut out for plasterboard	18.11 × 18.11 in
Lamp type	LED 350mA
Lamp wattage	2 × 6.5W
Luminous efficacy	2 × 930 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K
Light hole	-
Voltage connection	50/60Hz
CRI	>90
Note	Other available light colors: 2700K, 4000K (on request).

designplan® 

79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042