

UPDOWN 3.6


The Updown series is an outdoor wall-mounted fixture with a minimalist design. It is available in white, blue or RGB light with up or down optics options and 4 standard finishes.



TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 6W (24VDC) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Aluminum Lens: Transparent Extra-Clear Glass |
| CCT | 2700K, 3000K, 4000K, 5000K, Blue |
| CRI | CRI >80 |
| BUG Rating | B0-U1-G0 (3000K, 22°, 54°) B1-U1-G0 (3000K, 15°) |
| Delivered Lumens | 239 lm (3000K, 22°) |
| Efficacy | 40 lm/W (3000K, 22°) |
| Optics | 15°, 22°, 54° |
| Finish | 4 Standard, See Below |
| Fixture Dimensions | 1.93" x 1.93" x 3.54" |
| Fixture Weight | 0.75 lbs. |
| LED Source | 3 Power LEDs |
| Lumen Maintenance | L90, B10>50,000hrs |
| Color Consistency | 1/4 ANSI BIN |
| Operating Temp. | -4°F to +113°F |
| IP Rating | IP65 |
| Impact Rating | — |

Fixture Dimensions

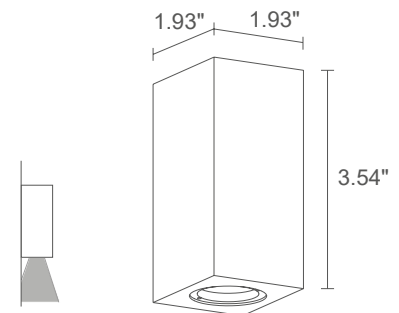

ORDERING INFORMATION

Example: UD36005MT. Accessories / Power Supplies ordered separately.

| UD3600 | | | |
|-----------|--|-------------------------------|---|
| Model No. | CCT | Optics | Finish |
| UD3600 | F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue | S - 15° M - 22° L - 54° | E - White A - Anodized Aluminum H - Anthracite T - Cor-ten |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


24VDC

| Part Number | Description | Input/Output | # of Fixtures |
|---------------------------|---|-------------------------------------|---------------|
| PPLT00149 | Non-Dim | 120VAC to 24VDC, 10W, Class 2, IP65 | 1-1 |
| PPLT00632 | 0-10V Dimming (Dim to Off) | 120-277VAC to 24VDC, 12W, Class 2 | 1-1 |
| PPLT00481 | Non-Dim | 120-277VAC to 24VDC, 24W, Class 2 | 1-3 |
| PPLT00543 | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 2-13 |

For other power supply options consult factory.

ACCESSORIES

Installation



- WD0103** - White
- WD0100** - Anodized aluminum
- WD0104** - Anthracite
- WD0102** - Cor-ten
- Spacer


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


S - 15°

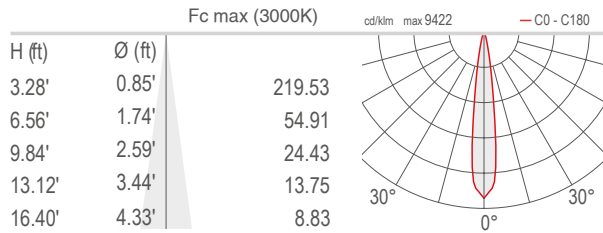

M - 22°

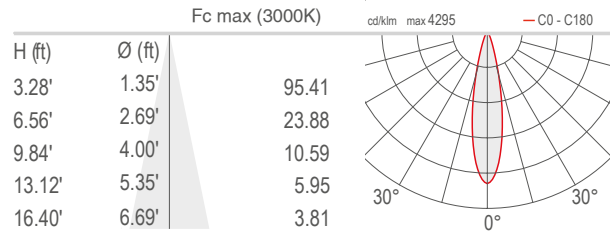

L - 54°

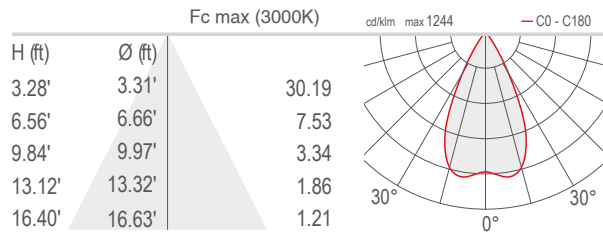

Job Name/Date:

Fixture Type Designation: