

UPDOWN 7.0



The Updown 7 is an outdoor wall-mounted fixture with a minimalist design. It is available in white or blue light with 2, 3 and 4 beams in up or down options and 4 standard finishes.



TECHNICAL DATA

Wattage / Input	4W, 6W, 8W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Lens: Tempered, Transparent Glass
CCT	2700K, 3000K, 4000K, 5000K, Blue
CRI	CRI >80
BUG Rating	B0-U0-G0 (3000K, 500mA)
Delivered Lumens	103 lm (3000K, 500mA, 20°) per beam
Efficacy	25.75 lm/W (3000K, 500mA, 22°) per beam
Optics	Up and Down optics available. See below.
Finish	4 Standard, See Below
Fixture Dimensions	3.94" x 3.94" x 1.38"
Fixture Weight	1.54 lbs
LED Source	2, 3, 4 Power LEDs
Lumen Maintenance	L90, B10>50,000hrs
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP65
Impact Rating	—

Fixture Dimensions

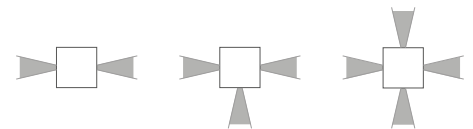

ORDERING INFORMATION

Example: UD70329SH. Accessories / Power Supplies ordered separately.

Model No.	CCT	Optics	Finish
UD7022 (4W - double beam)	F - 2700K	S - 10°	E - White
UD7032 (6W - 3 beams)	5 - 3000K	M - 20°	A - Anodized Aluminum
UD7042 (8W - 4 beams)	9 - 4000K	L - 40°	H - Anthracite
	0 - 5000K		T - Cor-ten
	1 - Blue		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures		
			4W	6W	8W
PPLT00154	0-10V Dimming to 10%	120-277VAC to 500mA, 12W, Class 2	3-3	2-2	N/A
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2	1-5	1-3	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 50W, Class 2	1-8	1-5	1-4
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-24	1-16	1-12

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-2

For other power supply options consult factory.


PHOTOMETRIC DATA

Note all Photometry is 3000K


S - 10°

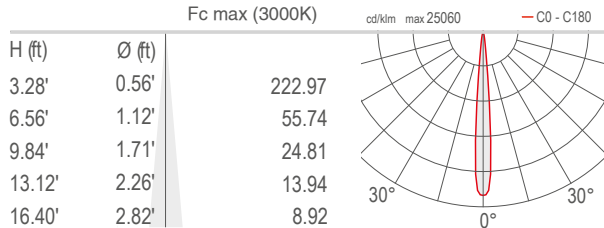

M - 20°

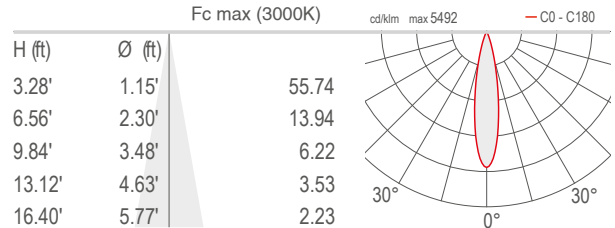

L - 40°

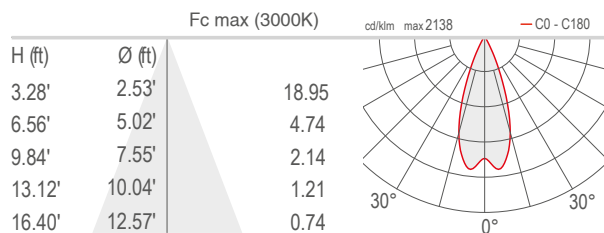

Job Name/Date:

Fixture Type Designation: