


OUTDOOR WALL MOUNTED WITH VARIOUS BEAMS, AND WHITE AND RGB LIGHT




SINGLE BEAM



DOUBLE BEAM



DOUBLE BEAM



2 / 3 / 4 BEAMS

CONSTANT CURRENT



UPDOWN 3.0

6W 500mA
RGB: 3W 350mA



UPDOWN 4.0

6W 350mA



UPDOWN 6.0

4W 500mA



UPDOWN 7.0

4W/6W/8W 500mA

CONSTANT VOLTAGE




UPDOWN 3.6

6W
24VDC




UPDOWN 4.6

6W
24VDC



UPDOWN 3.0



POWER / MODEL CODE

6W 500mA blue/white light
UD3032 **E** White
UD3032 **A** Anodized grey
UD3032 **H** Anthracite
UD3032 **T** Corten

3W 350mA RGB light
UD3031 6 **E** White
UD3031 6 **A** Anodized grey
UD3031 6 **H** Anthracite
UD3031 6 **T** Corten


LED COLOR

F - 2700K
5 - 3000K
9 - 4000K
1 - blue


OPTICS

S - 15°
M - 22°
L - 54°

LUMEN OUTPUT AT SOURCE	436 lm (3000K, 500mA) RGB: 160 lm, R: 59 lm G: 76 lm B: 25 lm (350mA)
DELIVERED LUMEN OUTPUT	239 lm (3000K, 500mA, 22°) RGB: 114 lm, R: 42 lm G: 54 lm B: 18 lm (350mA, 22°)
NO. AND TYPE OF LED	3 power LEDs 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum lens in transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft PVC cable FROR 2x0.35 Ø0.14 in
WIRING	series
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page
NOTES	spacer with RAL finish available on request

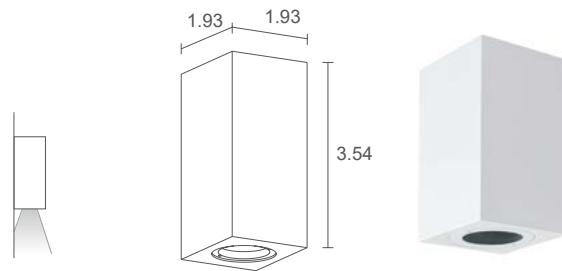

UPDOWN 3.6





6W 24VDC
UD3600 **E** White
UD3600 **A** Anodized grey
UD3600 **H** Anthracite
UD3600 **T** Corten

F - 2700K
5 - 3000K
9 - 4000K
1 - blue

S - 15°
M - 22°
L - 54°

LUMEN OUTPUT AT SOURCE	436 lm (3000K)
DELIVERED LUMEN OUTPUT	239 lm (3000K, 22°)
NO. AND TYPE OF LED	3 power LEDs 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum lens in transparent extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft PVC cable FROR 2x0.35 Ø0.14 in
WIRING	parallel
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page
NOTES	spacer with RAL finish available on request



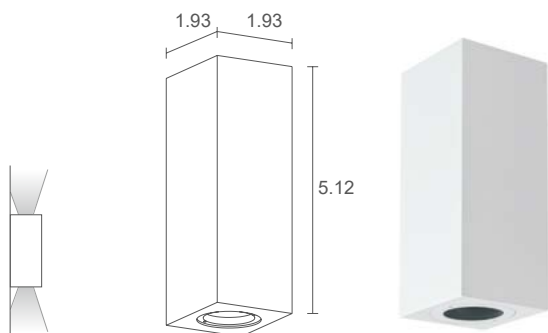


UPDOWN 4.0



6W 350mA

UD4061 **E** White
UD4061 **A** Anodized grey
UD4061 **H** Anthracite
UD4061 **T** Cor-ten

UPDOWN 4.6



6W 24VDC


UD4600 **E** White
UD4600 **A** Anodized grey
UD4600 **H** Anthracite
UD4600 **T** Cor-ten


	F - 2700K 5 - 3000K 9 - 4000K 1 - blue 6 - RGB
	UP optics: S - 15° M - 22° L - 54°
	DOWN optics: S - 15° M - 22° L - 54°

	F - 2700K 5 - 3000K 9 - 4000K 1 - blue
	UP optics: S - 15° M - 22° L - 54°
	DOWN optics: S - 15° M - 22° L - 54°

472 lm (3000K, 350mA) RGB: 320 lm, R: 118 lm G: 152 lm B: 50 lm (350mA)
364 lm (3000K, 350mA, 22°), RGB: 228 lm, R: 84 lm G: 108 lm B: 36 lm (350mA, 22°)
6 power LEDs 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
body in anodized aluminum lens in transparent extra-clear glass
remote power supply required, not included
includes 0.98 ft PVC cable FROR 2x0.35 Ø0.14 in
series
surface mounted (wall)
see accessories page
spacer with RAL finish available on request

472 lm (3000K)
364 lm (3000K, 22°)
6 power LEDs 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
body in anodized aluminum lens in transparent extra-clear glass
remote power supply required, not included
includes 0.98 ft PVC cable FROR 2x0.35 Ø0.14 in
parallel
surface mounted (wall)
see accessories page
spacer with RAL finish available on request



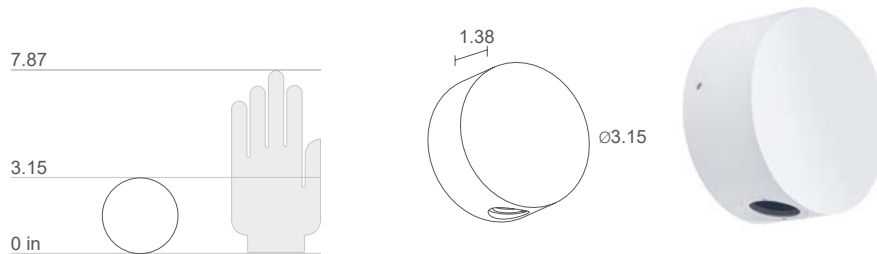

UPDOWN 6.0



0.93 lbs

IP65



CASAMBI

POWER / MODEL CODE

4W 500mA

UD6022 ■ ■ ■ **E**

White

UD6022 ■ ■ ■ **A**

Anodized grey

UD6022 ■ ■ ■ **H**

Anthracite

UD6022 ■ ■ ■ **T**

Cor-ten

LED COLOR

F - 2700K

S - 3000K

9 - 4000K

1 - blue

OPTICS

UP optics:

S - 10°

M - 20°

L - 40°

DOWN optics:

S - 10°

M - 20°

L - 40°

LUMEN OUTPUT AT SOURCE	290 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	206 lm (3000K, 500mA, 20°)
NO. AND TYPE OF LED	2 power LEDs 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum lens in transparent, tempered glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft PVC cable FROR 2x0.35 Ø0.14 in
WIRING	series
MOUNTING	surface mounted (wall)



White



Anodized
grey




Anthracite



Cor-ten



Designplan | L&L Luce&Light

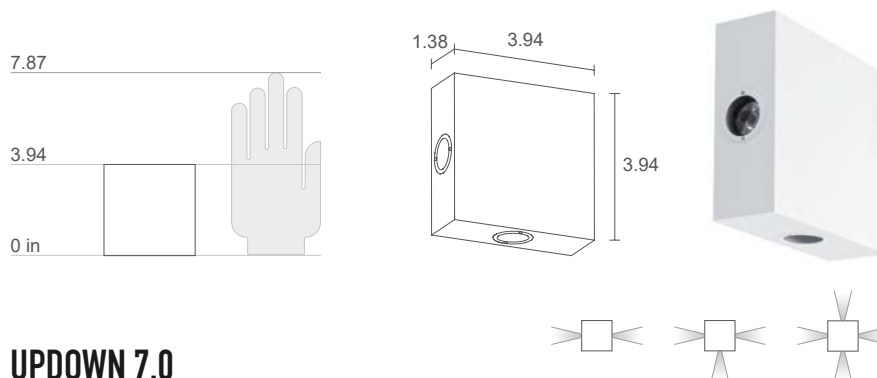

UPDOWN 7.0

LED TECH 1.54 lbs IP65
CASAMBI

POWER / MODEL CODE


4W 500mA double beam
UD7022 ■ ■ **E** White
UD7022 ■ ■ **A** Anodized grey
UD7022 ■ ■ **H** Anthracite
UD7022 ■ ■ **T** Cor-ten

6W 500mA 3 beams
UD7032 ■ ■ **E** White
UD7032 ■ ■ **A** Anodized grey
UD7032 ■ ■ **H** Anthracite
UD7032 ■ ■ **T** Cor-ten

8W 500mA 4 beams
UD7042 ■ ■ **E** White
UD7042 ■ ■ **A** Anodized grey
UD7042 ■ ■ **H** Anthracite
UD7042 ■ ■ **T** Cor-ten

■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 1 - blue
■ OPTICS	S - 10° M - 20° L - 40°

LUMEN OUTPUT AT SOURCE	290 lm (3000K, 500mA) 435 lm (3000K, 500mA) 580 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	206 lm (3000K, 500mA, 20°) 309 lm (3000K, 500mA, 20°) 412 lm (3000K, 500mA, 20°)
NO. AND TYPE OF LED	2, 3, 4 power LEDs, 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum lens in transparent, tempered glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 0.98 ft PVC cable FROR 2x0.35 Ø0.14 in
WIRING	series
MOUNTING	surface mounted (wall)




VIGNAIOLI
CONTRÀ
SARDÀ



ACCESSORIES

ACCESSORIES FOR INSTALLATION



WD0103 - White

WD0100 - Anodized grey

WD0104 - Anthracite

WD0102 - Cor-ten

Spacer

RAL finish available on request


(Updown 3 / 4)

UPDOWN


OUTDOOR WALL MOUNTED

UPDOWN 3.0 3.6


S - 15°

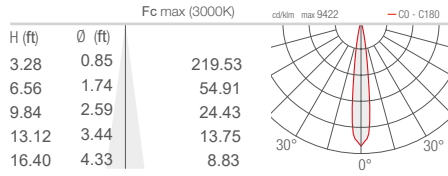

M - 22°

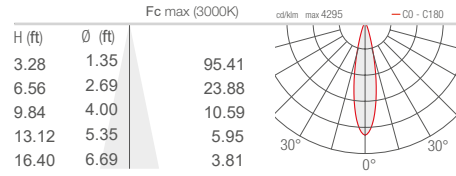


L - 54°

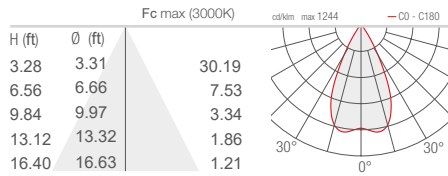


UPDOWN 4.0 4.6


S - 15°

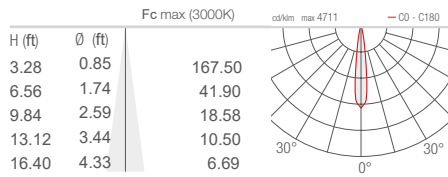

M - 22°

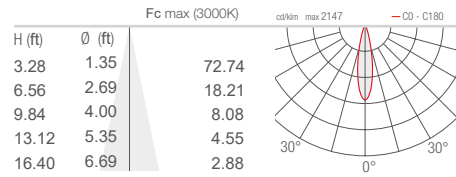


L - 54°

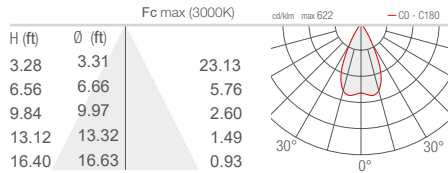


UPDOWN 6.0 7.0

S - 10°

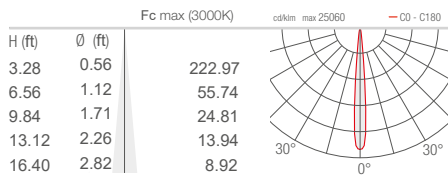

M - 20°

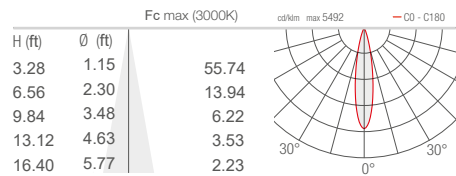

L - 40°

