

Dotz Ursa Minor is a sleek 1.9" round wet label LED downlight with on board 0-10V dimming which can be installed recessed with 3 springs or panel mounted with 1.0" conduit nut on the threaded part of the body. It comes with frosted Acrylume™ acrylic trim with an opening in the middle.



## TECHNICAL DATA

<b>Wattage / Input</b>	1W, 3W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Die Cast Aluminum Lens: 3/16" Tempered Glass Cable Length: 2.0'
<b>CCT</b>	3000K, 4000K, 5000K (Static color on request)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	192 lm (3W, 3000K)
<b>Efficacy</b>	64 lm/W
<b>Optics</b>	6°, 25°, 6°x25° (only available on Clear Lens)
<b>Finishes</b>	Frosted Acrylic (Acrylume™)
<b>LED Source</b>	3W CREE LED
<b>Fixture Dimensions</b>	Ø1.89" x 4.19" I
<b>Body</b>	Ø1.16"
<b>Cut-out Dimension</b>	Ø1.25"
<b>IP Rating</b>	IP65, Weatherproof Gland

## MADE IN THE USA

Complies with LM79 and LM80  
Complies with ARRA

Fixture Dimensions  
See Drawing on page 2.

## ORDERING INFORMATION


Example: **URI-3-30-T-6-FA**. Power Supplies ordered separately.

URI	-		-		-		-	F
<b>Model No.</b>	<b>Wattage</b>	<b>CCT</b>	<b>Lens</b>	<b>Optics</b>	<b>Finish</b>			
URI - Ursa Minor	1 - 1W 3 - 3W	30 - 3000K 40 - 4000K 50 - 5000K  <b>Note:</b> Static Red, Green, Blue, Amber on request.	0 - None T - Clear Tempered Glass	0 - None 1 - 6° Spot 2 - 25° Medium 3 - 6°x25° Asymmetric  <b>Note:</b> Optics are for use with "T" Clear glass lens.	FA - Frosted Acrylic			

Job Name/Date:

Fixture Type Designation:

## Fixture Dimensions

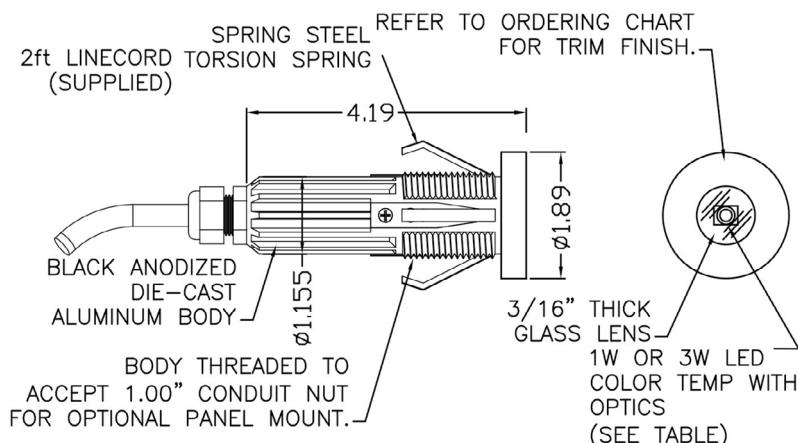

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output		# of Fixtures	
		1W	3W	1W	3W
<a href="#">PPLT00155</a>	Non-Dim	120-277VAC to 350mA, 30W, Class 2		1-24	1-8
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP		1-80	1-26

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						1W	3W
<a href="#">PPLT00530</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-76	1-25


For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Dotz Round 3W 3000K Clear Lens - Medium Optic

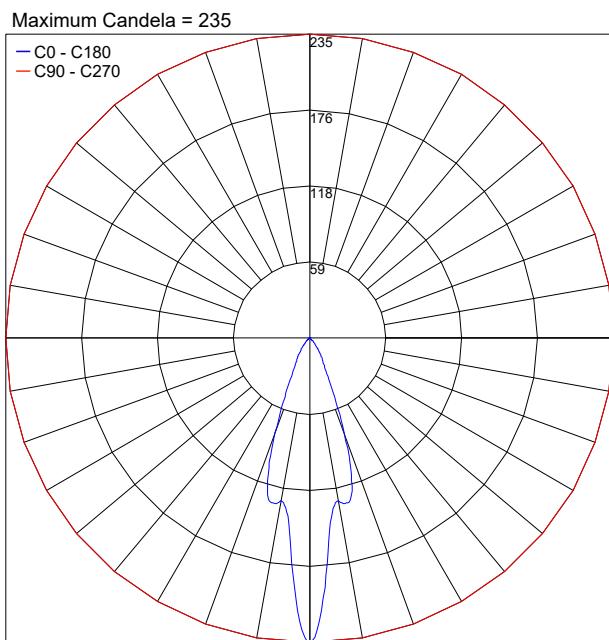

FILENAME : DOTZ 1X3W 3000K ROUND CLEAR LENS MEDIUM OPTIC LTL21264.IES


Dotz Round 3W 3000K Clear Lens - Narrow Optic

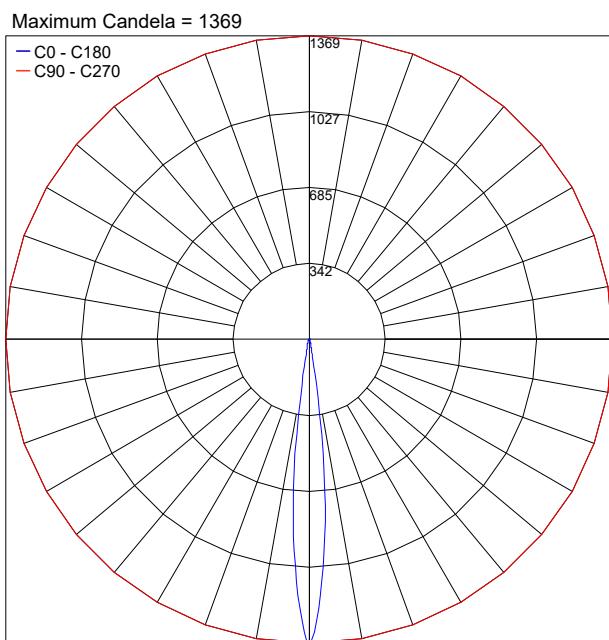

FILENAME : DOTZ 1X3W 3000K ROUND CLEAR LENS NARROW OPTIC LTL21260.IES

LTL TEST #21264


CIRCLE-OF-LIGHT

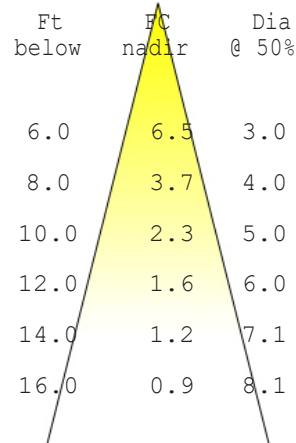

NOTE: 'Dia' spans the edge-points that are half of nadir FC

LTL TEST #21260

CIRCLE-OF-LIGHT

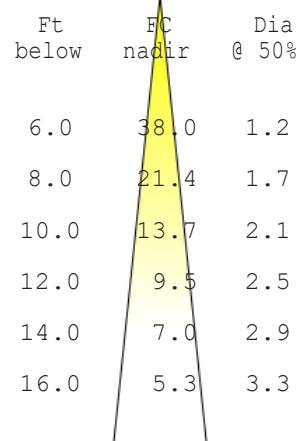

NOTE: 'Dia' spans the edge-points that are half of nadir FC

Job Name/Date:

Fixture Type Designation: