



READING LAMPS FOR HOSPITALITY AND PRIVATE HOMES



MOUNTED ON A SHELF

OPTICS VERSION



2700K 3000K 4000K 5000K




narrow medium wide



WALL 8.0
2W 500mA

✓
WALL 1
 3000K, 2.5W, satin, customized version
 with rear cable entry

Private collection, Milan, Italy
 Courtesy of / Susanna Roda

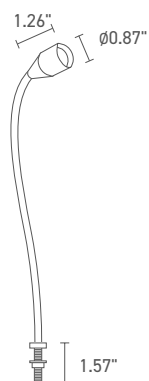

Flexible neck:
 Ø0.31" - 15.75"



WALL 8.0

LED TECH 0.35 lbs IP40

POWER / POWER SUPPLY
MODEL NO.

2W 500mA 15.75"

PL801240 **C** Chrome

PL801240 **S** Satin

LED COLOR

F - 2700K
S - 3000K
9 - 4000K
0 - 5000K

OPTICS

S - 10°
M - 25°
L - 40°

LUMEN OUTPUT AT SOURCE

145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT

103 lm (3000K, 500mA, 25°)

NO. AND TYPE OF LEDS

1 power LED
 1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)

MATERIAL

body in aluminum, neck in brass

POWER SUPPLY UNIT

Power supply required, not included

POWER CABLES

includes 1.64 ft PVC cable
 FROR 2x0.35 Ø0.14"

WIRING

series

MOUNTING

surface mounted (shelf max 1.18")

ACCESSORIES

see accessories page

NOTES

Casambi-compatible version, controllable with
 the Casambi app, available on request

PHOTOMETRIC DATA

see p. 5





ACCESSORIES

POWER CABLES

PVC cable

FROR 2x0.35 Ø0.14"

your choice of length

WF0110

(Wall 8.0)


order together with the lighting fixture

WALL


READING LAMPS

WALL 8.0

S - 10°

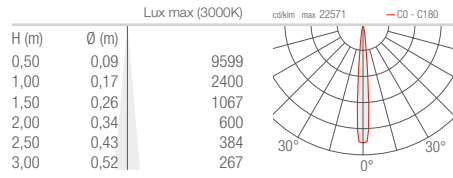

M - 25°

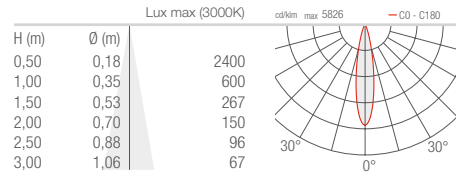

L - 40°

