



Wave S is a recessed wall fixture that is made of CALCYT® plaster that blends effortlessly into traditional and contemporary interiors. It is available in 4 color temperatures and features paintable plaster to easily match your interior walls.



TECHNICAL DATA

Wattage / Input	7W (250mA / 350mA for 2200K)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster Lens: Clear Acrylic
CCT	2200K, 2700K, 3000K, 4000K
CRI	>90
Optics	Fixed
Finishes	Paintable Plaster
Cut-Out Dimensions	13.43" x 11.42"
Fixture Dimensions	13.07" l x 2.76" w x 11.22" h
LED Source	600 lm LED
Color Consistency	2-Step MacAdam
IP Rating	IP20

Wall Cut-Out: 13.43" x 11.42"
Fixture Dimensions



ORDERING INFORMATION

Example: 320 29 100. Accessories / Power Supplies ordered separately.

--

Model No.	Description
320 29 500 - 2200K	600lm LED, Remote Driver 250mA
320 29 000 - 2700K	600 lm LED, Remote Driver 250mA
320 29 100 - 3000K	600 lm LED, Remote Driver 350mA
320 29 200 - 4000K	1000 lm LED, Remote (Consult Factory)

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

250mA - for 2700K and 3000K versions

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2, DAMP	1-1
PPLT00290	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2, DAMP	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2, DAMP	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2, DAMP	1-1

SUGGESTED POWER SUPPLIES

350mA - for 2200K version

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2


Suggested Lutron Compatible - 350mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

REQUIRED ACCESSORIES


Installation

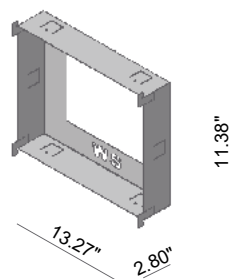

720 01 000
Outer Casing

PHOTOMETRIC DATA

Note all Photometry is 3000K

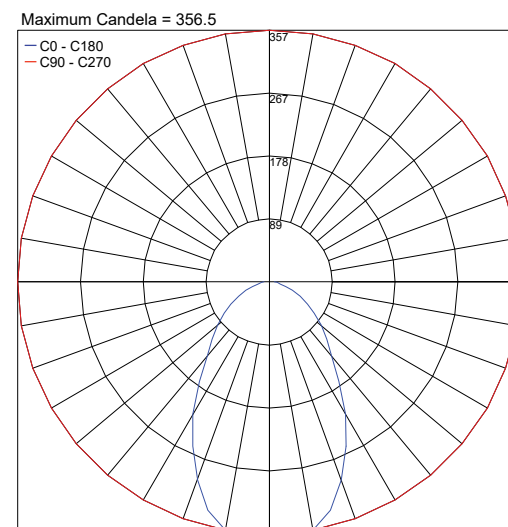

Job Name/Date:

Fixture Type Designation: