

WINDOW WAVE 2.0


Window Wave 2.0 is a surface mounted luminaire for outdoor installation on a window sill, with asymmetric 8° x 170° “window-washer” light distribution. It is available in 2 color temperatures with 3 finish options.



TECHNICAL DATA


| | |
|---------------------------|---|
| Wattage / Input | 7W (120VAC) |
| Power Supply | Integral |
| Dimming | 0-10V Dimming Only Available with Remote Driver - Consult Factory |
| Construction | Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28' |
| CCT | 3000K, 4000K |
| Delivered Lumens | 582 lm (3000K) |
| Efficacy | 83.1 lm/W |
| Optics | 8° x 170° |
| Finishes | Textured Gray, Anthracite Gray (Matte Black and other colors on request) |
| Fixture Dimensions | 4.02" l x 5.24" w x 2.44" h |
| LED Source | 1 x CREE “XHP35” LED |
| Fixture Weight | 2.2 lbs |
| IP Rating | IP65 |
| IK Rating | IK08 |

Fixture Dimensions

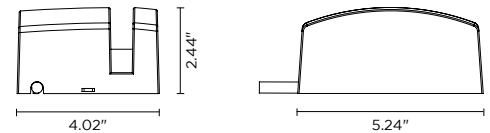

PHOTOMETRIC DATA

Maximum Candela = 2828.8

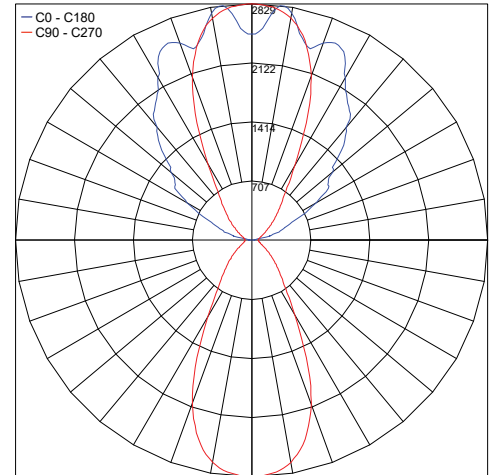

PHOTOMETRIC FILENAME: WINDOW WAVE 2.0 401102P.IES

ORDERING INFORMATION

Example: 401102P-30K-8x170-TG

| | | | | | | |
|------------------|----------------------------|-----------------|--|-------|---|--|
| 401102P | - | | - | 8x170 | - | |
| Model No. | CCT | Optic | Finish | | | |
| 401102P | 30K - 3000K 40K - 4000K | 8x170 - 8°x170° | TG - Textured Gray AG - Anthracite Gray | | | |

Job Name/Date:

Fixture Type Designation: