

WINDOW WAVE 2.0 RGBW

Window Wave 2.0 RGBW is an RGBW, surface mounted luminaire for outdoor installation on a window sill, with asymmetric 8° x 170° “window-washer” light distribution. It is available with 3 finish options.


Requires DMX controller to control color (provided by others).



TECHNICAL DATA

Wattage / Input	4.5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Glass Cable Length: 3.28'
CCT	RGBW - DMX Decoder Built Into Fixture
Delivered Lumens	160 lm (3000K)
Efficacy	35.6 lm/W
Optics	8° x 170°
Finishes	Textured Gray, Anthracite Gray (Matte Black and other colors on request)
Fixture Dimensions	4.02" l x 5.24" w x 2.44" h
LED Source	1 CREE "XML" COLOR RGBW LED
Fixture Weight	2.2 lbs
IP Rating	IP65
IK Rating	IK08

Fixture Dimensions

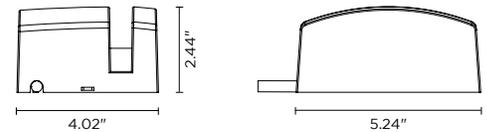

ORDERING INFORMATION

Example: 401102RGBWP-RGBW-8x170-TG. Power Supplies / Accessories ordered separately.

401102RGBWP	-		-	8x170	-	
Model No.	CCT	Optic	Finish			
401102RGBWP	RGBW - RGBW	8x170 - 8°x170°	TG - Textured Gray AG - Anthracite Gray			

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2, IP66	1-4

For other power supply options consult factory.

ACCESSORIES

Controllers (RGBW)



[PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: