


XJR8 is a square, recessed, adjustable (± 30) luminaire for indoor installation on plasterboard walls or ceilings. It has a backward light source with visible mechanisms which emanates precise and punctual beams without renouncing space elegance. It is available in a static white version (3000K standard) with a 40° wide beam and a white finish.



TECHNICAL DATA

Wattage / Input	9W (500mA) Static White
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	557 lm (3000K)
Efficacy	61.9 lm/W (3000K)
Optics	40° Wide Beam
Finishes	Matte White
Cut-Out Dimensions	2.99" x 2.99"
Fixture Dimensions	3.35" l x 3.35" w x 2.87" h
Fixture Weight	0.55 lbs
LED Source	LED COB Professional
IP Rating	IP20

Fixture Dimensions



ORDERING INFORMATION

Example: BU1031 WH 2 R 40 M 30 WD.US. Power supplies for remote ordered separately.

BU1031	WH	2 R 40		.US
Model No.	Finish	Optics	CCT	
BU1031 - Static White	WH - white	2 R 40 - 40°	M 30 WD - 3000K (standard) M 27 WD - 2700K (on request) M 40 WD - 4000K (on request)	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA - 9W Static White Version


Part Number	Description	Input/Output	Fixtures
PPLT00154	0-10V Dimming to 10%	120-277VAC to 500mA, 12W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA 20W, Class 2	1-2
PPLT00527	Phase Dim (120V Only)	120VAC to 500mA, 25W, Class 2, IP66	2-2
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-2

For other power supply options consult factory.

PHOTOMETRIC DATA

All photometry is 3000K

Maximum Candela = 685

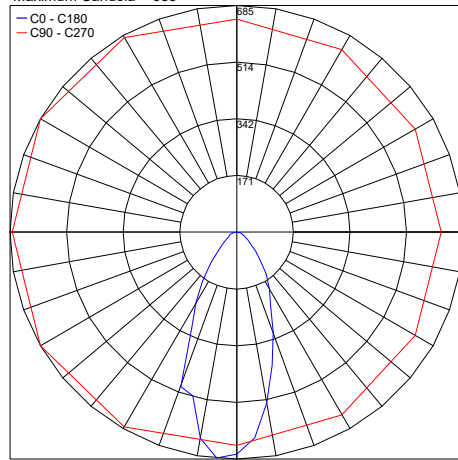

PHOTOMETRIC FILENAME : XJR8 - BU1031.IES

Job Name/Date:

Fixture Type Designation: