


XJR9 is a round recessed, adjustable ($\pm 30^\circ$) luminaire for indoor installation on plasterboard walls or ceilings. It has a light source with adjustable visible mechanisms which creates beams that embellish the environment without invading it. It is available in a static white version (3000K standard) with a 40° wide beam and a white finish.



TECHNICAL DATA

Wattage / Input	9W (500mA) Static White
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	557 lm (3000K)
Efficacy	61.9 lm/W (3000K)
Optics	40° Wide Beam
Finishes	Matte White
Cut-Out Dimensions	$\varnothing 2.95"$
Fixture Dimensions	$\varnothing 3.54" \times 2.56"$
Aperature	$\varnothing 2.36"$
Fixture Weight	0.44 lbs
LED Source	LED COB Professional
IP Rating	IP20

Fixture Dimensions



ORDERING INFORMATION

Example: BU1041 WH 2 R 40 M 30 WD.US. Power supplies for remote ordered separately.

BU1041	WH	2 R 40		.US
Model No.	Finish	Optics	CCT	
BU1041 - Static White	WH - white	2 R 40 - 40°	M 30 WD - 3000K (standard) M 27 WD - 2700K (on request) M 40 WD - 4000K (on request)	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


500mA - 9W Static White Version

Part Number	Description	Input/Output	Fixtures
PPLT00154	0-10V Dimming to 10%	120-277VAC to 500mA, 12W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA 20W, Class 2	1-2
PPLT00527	Phase Dim (120V Only)	120VAC to 500mA, 25W, Class 2, IP66	2-2
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-2

*For other power supply options consult factory.***PHOTOMETRIC DATA***All photometry is 3000K*

Maximum Candela = 685

— C0 - C180
— C90 - C270

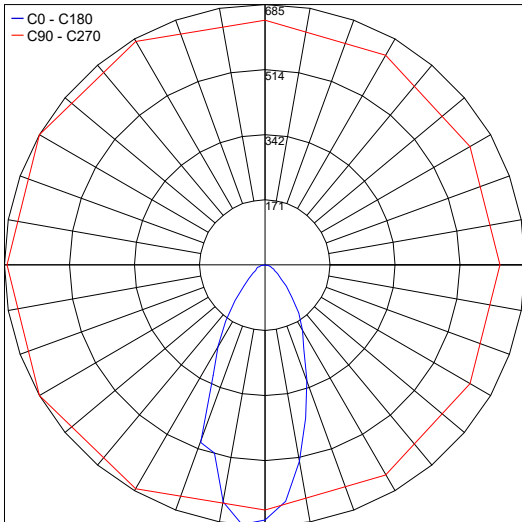

PHOTOMETRIC FILENAME : XJR9 - BU1041.IES

Job Name/Date:

Fixture Type Designation: