


XO is a series of linear pendants that are both functional and decorative and perfectly suited for installation in work or living spaces. The unique structure of the XO allows down light or up-down light. It is available in 3 different length with a variety of finishes.

TECHNICAL DATA

Wattage / Input	28W, 56W (500mA)
Power Supply	Remote, included.
Dimming	0-10V Dimming
Construction	Body: Aluminum, Veneer Lens: Acrylic Diffuser
CCT	3000K, 4000K
CRI	>90
Delivered Lumens	3010 lm (Downlight - 4000K) 6020 lm (Up-Down - 4000K)
Efficacy	107.5 lm/W (All)
Optics	Diffuse
Finishes	Black, White (aluminum) Oak, Umber, Rosewood (veneer)
Fixture Dimensions	50.5" l x 2.75" w x 7.78" max from ceiling
IP Rating	IP20



Fixture Dimensions

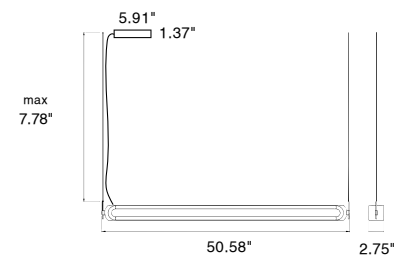

ORDERING INFORMATION

Example: N8142-4.

--

Model No.	Description
N8140	Downward - 28W - 3000K - Black
N8141	Downward - 28W - 3000K - White
N8140N	Downward - 28W - 4000K - Black
N8141N	Downward - 28W - 4000K - White
N8142	Up Down - 56W - 3000K - Black
N8143	Up Down - 56W - 3000K - White
N8142N	Up Down - 56W - 4000K - Black
N8143N	Up Down - 56W - 4000K - White

FOR VENEER FINISHES on Downlight & Up/Down versions -
please add one of the following to the end of code (ex: N8138-3):

- | | |
|-----------|--------------|
| 1 - Black | 3 - Oak |
| 2 - White | 4 - Umber |
| | 5 - Rosewood |


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 1083.2

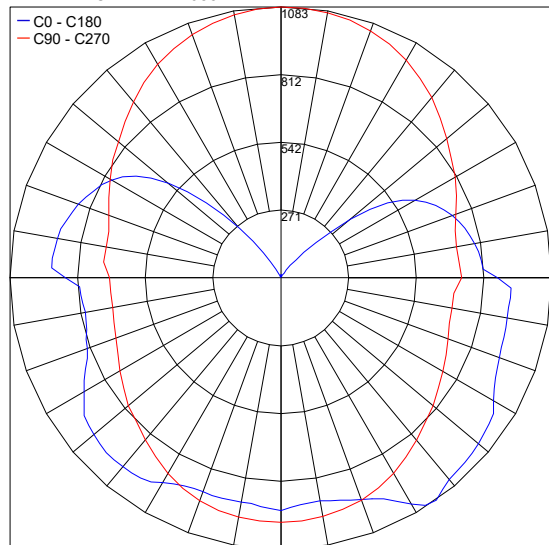

PHOTOMETRIC FILENAME : XO 1284.IES

Job Name/Date:

Fixture Type Designation: