


XO is a series of linear pendants that are both functional and decorative and perfectly suited for installation in work or living spaces. The unique structure of the XO allows down light or up-down light. It is available in 3 different length with a variety of finishes.

TECHNICAL DATA

Wattage / Input	42W, 84W (500mA)
Power Supply	Remote, included.
Dimming	0-10V Dimming
Construction	Body: Aluminum, Veneer Lens: Acrylic Diffuser
CCT	3000K, 4000K
CRI	>90
Delivered Lumens	4515 lm (Downlight - 4000K) 9030 lm (Up-Down - 4000K)
Efficacy	107.5 lm/W (All)
Optics	Diffuse
Finishes	Black, White (aluminum) Oak, Umber, Rosewood (veneer)
Fixture Dimensions	74.03" l x 2.75" w x 7.78" max from ceiling
IP Rating	IP20



Fixture Dimensions

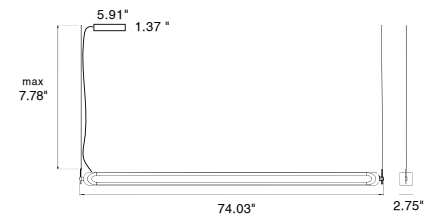

ORDERING INFORMATION

Example: N8152 or N8149-4.

--

Model No.	Description
N8148	Downward - 42W - 3000K - Black
N8149	Downward - 42W - 3000K - White
N8148N	Downward - 42W - 4000K - Black
N8149N	Downward - 42W - 4000K - White
N8150	Up Down - 84W - 3000K - Black
N8151	Up Down - 84W - 3000K - White
N8150N	Up Down - 84W - 4000K - Black
N8151N	Up Down - 84W - 4000K - White

FOR VENEER FINISHES on Downlight & Up/Down versions -
please add one of the following to the end of code (ex: N8138-3):


- | | |
|-----------|--------------|
| 1 - Black | 3 - Oak |
| 2 - White | 4 - Umber |
| | 5 - Rosewood |

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA*Note: All photometry is 3000K*

Maximum Candela = 2390.6

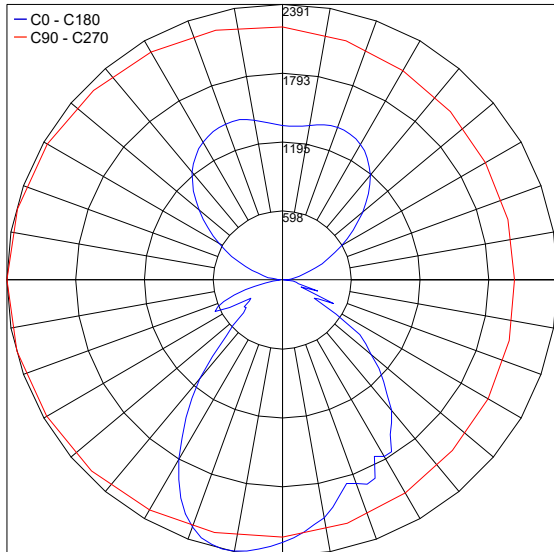

PHOTOMETRIC FILENAME : XO 1879.IES

Job Name/Date:

Fixture Type Designation: