


XO PRO is a series of linear pendants, in 3 different lengths, with soft round corners and exclusive veneer choices make it a one of a kind light fixture that elevates any indoor living or work space. The unique structure of the XO PRO allows down light or up-down light.

TECHNICAL DATA

Wattage / Input	48W, 72W (120 or 277VAC)
Power Supply	Integral
Dimming	0-10V Dimming
Construction	Body: Aluminum, Veneer Lens: Polycarbonate
CCT	3000K, 4000K
CRI	>90
Delivered Lumens	5070 lm (Downlight - 4000K) 7620 lm (Up-Down - 4000K)
Efficacy	105.6 lm/W (Downlight - 4000K) 105.8 lm/W (Up-Down - 4000K)
Optics	Prismatic
Finishes	Black, White (aluminum) Oak, Umber, Rosewood (veneer)
Fixture Dimensions	49.21" l x 3.19" w x 3.19"
IP Rating	IP20



Fixture Dimensions

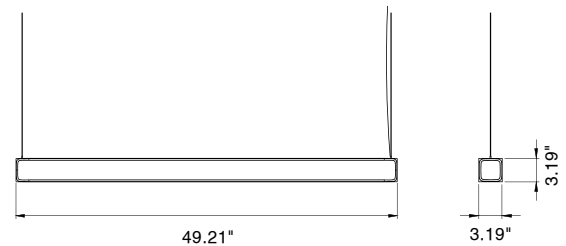

ORDERING INFORMATION

Example: N8166-4.

--

Model No.	Description
N8164	Downward - 48W - 3000K - Black
N8165	Downward - 48W - 3000K - White
N8164N	Downward - 48W - 4000K - Black
N8165N	Downward - 48W - 4000K - White
N8166	Up Down - 72W - 3000K - Black
N8167	Up Down - 72W - 3000K - White
N8166N	Up Down - 72W - 4000K - Black
N8167N	Up Down - 72W - 4000K - White

FOR VENEER FINISHES on Downlight & Up/Down versions -
please add one of the following to the end of code (ex: N8138-3):

- | | |
|-----------|--------------|
| 1 - Black | 3 - Oak |
| 2 - White | 4 - Umber |
| | 5 - Rosewood |

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometry is 3000K

DOWNLIGHT


Maximum Candela = 1545.2

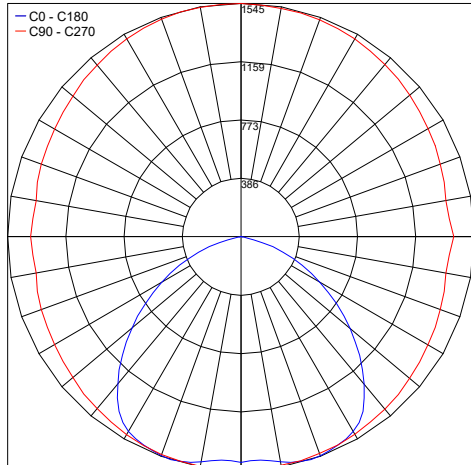

PHOTOMETRIC FILENAME : XO PRO DOWN-LIGHT.JES

UPLIGHT

Maximum Candela = 1140.9

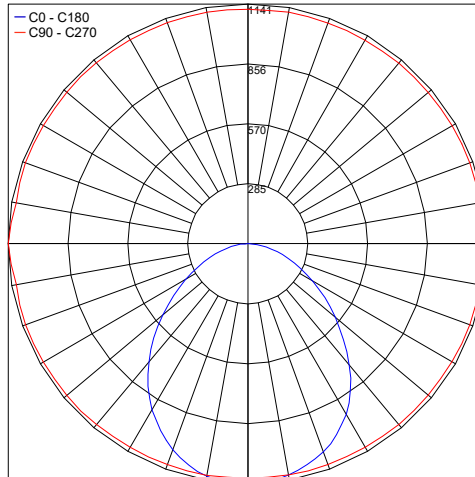

PHOTOMETRIC FILENAME : XO PRO UP-LIGHT.JES

Job Name/Date:

Fixture Type Designation: