

XO PRO is a series of linear pendants, in 3 different lengths, with soft round corners and exclusive veneer choices make it a one of a kind light fixture that elevates any indoor living or work space. The unique structure of the XO PRO allows down light or up-down light.



TECHNICAL DATA

Wattage / Input	60W, 90W (120 or 277VAC)
Power Supply	Integral
Dimming	0-10V Dimming
Construction	Body: Aluminum, Veneer Lens: Polycarbonate
CCT	3000K, 4000K
CRI	>90
Delivered Lumens	6337 lm (Downlight - 4000K) 9490 lm (Up-Down - 4000K)
Efficacy	105.6 lm/W (Downlight - 4000K) 105.4 lm/W (Up-Down - 4000K)
Optics	Prismatic
Finishes	Black, White (aluminum) Oak, Umber, Rosewood (veneer)
Fixture Dimensions	57.87" l x 3.19" w x 3.19"
IP Rating	IP20

Fixture Dimensions



ORDERING INFORMATION

Example: N8175N-3.

Model No.	Description
N8170	Downward - 60W - 3000K - Black
N8171	Downward - 60W - 3000K - White
N8170N	Downward - 60W - 4000K - Black
N8171N	Downward - 60W - 4000K - White
N8172	Up Down - 90W - 3000K - Black
N8173	Up Down - 90W - 3000K - White
N8172N	Up Down - 90W - 4000K - Black
N8173N	Up Down - 90W - 4000K - White

FOR VENEER FINISHES on Downlight & Up/Down versions -
please add one of the following to the end of code (ex: N8138-3):

- | | |
|-----------|--------------|
| 1 - Black | 3 - Oak |
| 2 - White | 4 - Umber |
| | 5 - Rosewood |

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometry is 3000K

DOWNLIGHT


Maximum Candela = 1545.2

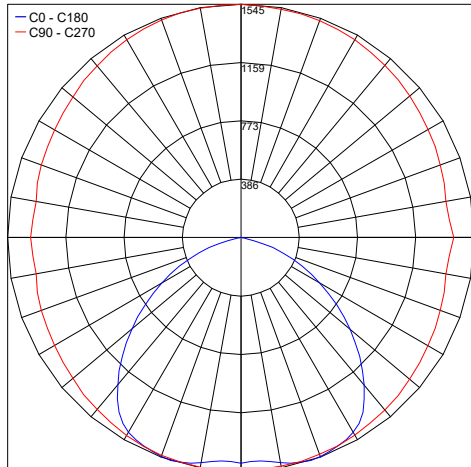

PHOTOMETRIC FILENAME : XO PRO DOWN-LIGHT.IES

UPLIGHT

Maximum Candela = 1140.9

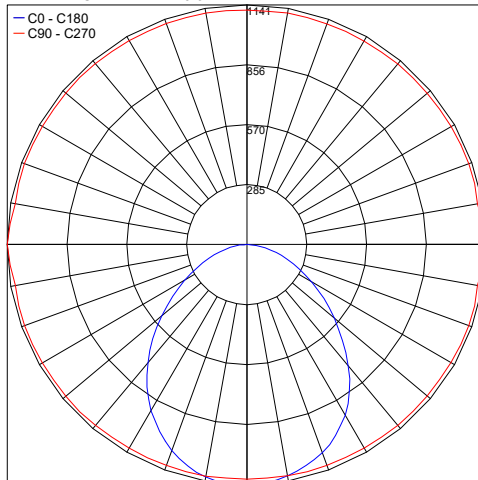

PHOTOMETRIC FILENAME : XO PRO UP-LIGHT.IES

Job Name/Date:

Fixture Type Designation: