


XT IP20 is an indoor recessed wall luminaire made of CALCYT® plaster and the extra large brother of the original Normall - sharing the same pure and simple lines. It is perfect for environments where a high light output is required.



Wall Cut-Out: 12.95" x 23.90"  
Fixture Dimensions

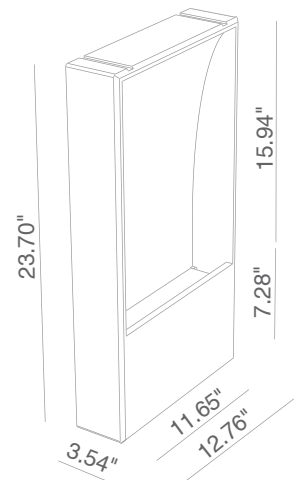

## TECHNICAL DATA

<b>Wattage / Input</b>	13.8W (500mA)
<b>Power Supply</b>	Remote, not included. See page 2
<b>Construction</b>	Body: CALCYT® Plaster Lens: Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>Optics</b>	Fixed
<b>Delivered Lumens</b>	—
<b>Finishes</b>	Paintable Plaster
<b>Cut-Out Dimensions</b>	12.95" x 23.90"
<b>Fixture Dimensions</b>	12.76" w x 3.54" l x 23.70" h
<b>Color Consistency</b>	2-Step MacAdam
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

Example: 108 26 200. Accessories / Power Supplies ordered separately.

Model No.	Description
108 26 000 - 2700K (13.8W, 2000 lm)	Remote Driver 500mA
108 26 100 - 3000K (13.8W, 2000 lm)	Remote Driver 500mA
108 26 200 - 4000K (13.8W, 2000 lm)	Remote Driver 500mA

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2	1-1
<a href="#">PPLT00527</a>	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	1-1
<a href="#">PPLT00480-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-4

## Suggested Lutron Compatible Drivers

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	Fixtures
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	1-1

For other power supply options consult factory.

## REQUIRED ACCESSORIES

### Installation



**708 01 000**  
Outer Casing

Job Name/Date:

Fixture Type Designation: