




YIN



Yin, a bi-emission indoor lamp of AirCoral® installable on walls, has a multifaceted form which creates a light capable of interacting with the space the product is placed in and with the product itself. The emanated beam, in fact, generates a juxtaposition of light and shadow on the surface of the luminaire, while the form breaks the walls linearity, imposing its presence in a very original way.

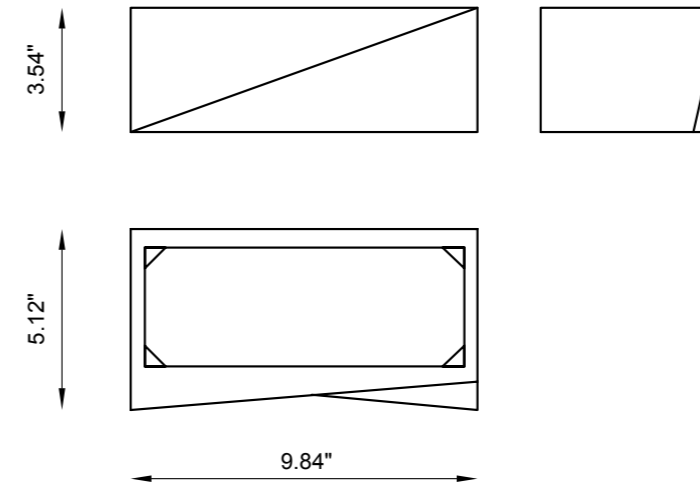

TECHNICAL FEATURES

Code	BU2816.AC
Type	Wall lamp ■
Material	AC: AirCoral®
Absorption capacity*	59.19 ft ²
Mounting	Wall mounting
IP rating	IP20
Control gear	Dimmable constant current driver
Lamp type	LED 350mA ⊕
Lamp wattage	2 x 6.5W
Luminous efficacy	2 x 810 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K White 2700K 4000K
Voltage connection	120-277VAC
CRI	>90

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

