

ZERO

Zero is a floor recessed luminaire available in five sizes ($\phi 1.77''$ - $\phi 2.56''$ - $\phi 3.35''$ - $\phi 4.33''$), made of turned aluminum in a natural finish and available with or without internal Honeycomb.


In the ZERO $\phi 4.33''$ version, the optical compartment can be swiveled by means of a mechanical swivel system; when the luminaire is opened, a graduated base allows the inclination to be adjusted.

The glass is tempered serigraphed transparent mechanically fixed with silicone glue.


- Power supply 24VDC, remote power supply to be ordered separately.
- $\phi 1.77''$ 24V (2W LED - 3W Total) beam 36°
- $\phi 2.56''$ 24V (5.8W LED - 6.3W Total) beam 52°
- $\phi 3.35''$ 24V (6.5W Total, LED) diffused
- $\phi 4.33''$ 12W adjustable
- All luminaires are supplied with a piece of multi-core rubber cable L. 7.87" suitable for outdoor use.
- Power LED 2700K (not available on $\phi 4.33''$) 3000K / 4000K CRI \geq 80
- Mid Power (solo per $\phi 3.35''$ 24VDC)
- IP67
- IK06 $\phi 1.77''$ / IK07 $\phi 2.56''$ / IK06 $\phi 3.35''$ / IK08 $\phi 4.33''$
- Installation plastic housing (9000, 9001,9002,9003) required for installation and IP connectors (9004,9005), remote power supplies to be ordered separately.

designplan® 



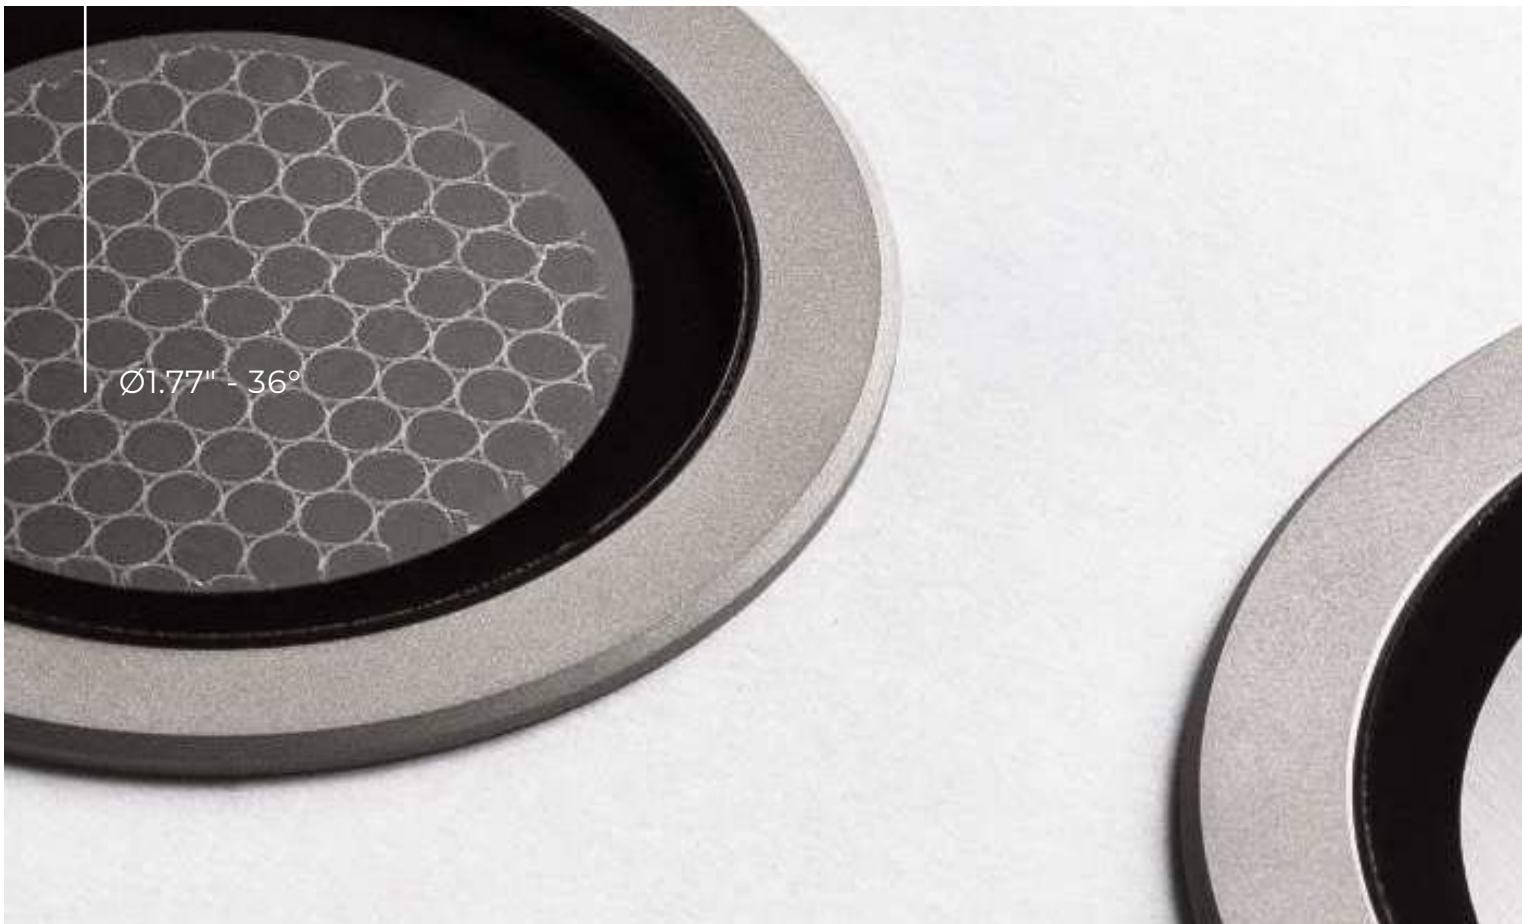

Ø1.77" - 36°



ZERO
Ø1.77"

Without Honeycomb

18°

2W LED

3W Total

24VDC



aluminum

2700K 169 lm



900132146


3000K 178 lm

900112146

4000K 187 lm

900122146

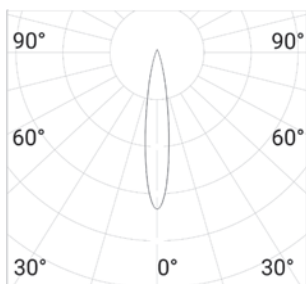



ZERO
Ø1.77"

With Honeycomb

18°

2W LED

3W Total

24VDC



aluminum

2700K 98 lm



900132136


3000K 103 lm

900112136

4000K 108 lm

900122136

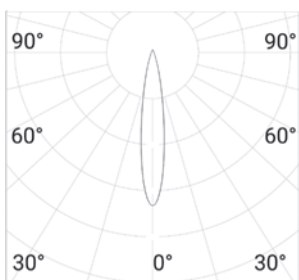



ZERO
Ø1.77"

Without Honeycomb

36°

2W LED

3W Total

24VDC



aluminium

2700K	224 lm	900132036
3000K	236 lm	900112036
4000K	248 lm	900122036

ZERO
Ø1.77"

With Honeycomb

36°

2W LED


3W Total

24VDC




aluminium


2700K	75 lm	900132026
3000K	79 lm	900112026
4000K	83 lm	900122026

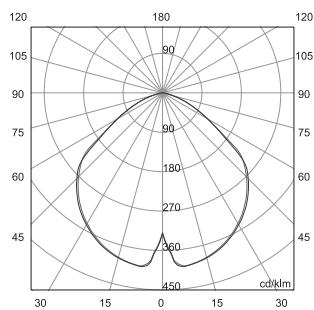


Without Honeycomb

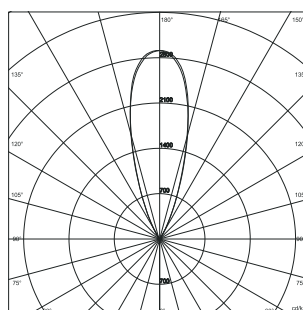

With Honeycomb





ZERO
Ø2.56"

Without Honeycomb

26°

5.8W LED


6.3W Total

24VDC



aluminum

2700K	432 lm	900132126
3000K	455 lm	900112126
4000K	478 lm	900122126



ZERO
Ø2.56"

With Honeycomb

26°

5.8W LED


6.3W Total

24VDC




aluminum


2700K	251 lm	900132156
3000K	264 lm	900112156
4000K	277 lm	900122156

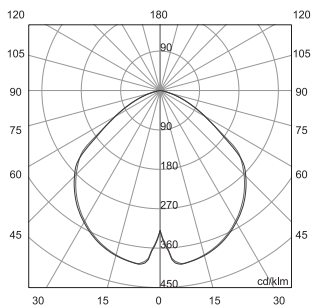

Without Honeycomb

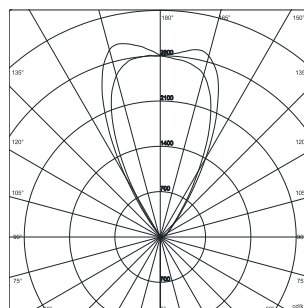


With Honeycomb



2.24"

Ø2.56"



ZERO
Ø2.56"

Without Honeycomb

52°

5.8W LED

6.3W Total

24VDC



aluminum

2700K 409 lm

900132076

3000K 431 lm

900112076

4000K 453 lm

900122076



ZERO
Ø2.56"

With Honeycomb

52°

5.8W LED

6.3W Total

24VDC



aluminum

2700K 135 lm


900132066

3000K 142 lm


900112066

4000K 149 lm


900122066

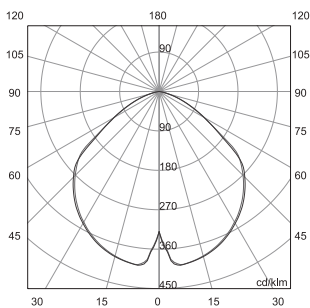


Without Honeycomb

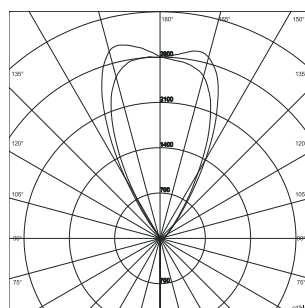

With Honeycomb





ZERO
Ø3.35"

Without Honeycomb

Diffused

5.5W LED

24VDC




aluminium

3000K 451 lm

900112166

4000K 473 lm

900122166



ZERO
Ø3.35"

With Honeycomb

Diffused

5.5W LED

24VDC




aluminium

3000K 131 lm


900112086

4000K 137 lm


900122086

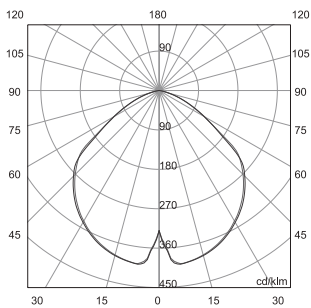

Without Honeycomb

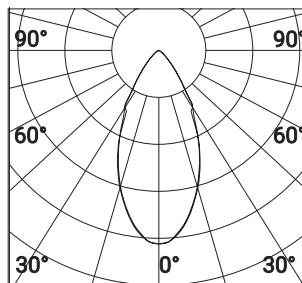


With Honeycomb



2.36"

Ø3.35"

BEAMS
15° - 24° - 38°



Adjustable
Ø4.33"

15°

12W LED

24VDC



aluminium

2700K 1088 lm

900132016

3000K 1146 lm

900112016

4000K 1203 lm

900122016

Adjustable
Ø4.33"

36°

12W LED

24VDC



aluminium

2700K 1081 lm

900132106

3000K 1143 lm

900112106

4000K 1199 lm

900122106




Adjustable
Ø4.33"

60°

12W LED

24VDC



aluminium

2700K 1019 lm


900132116

3000K 1073 lm


900112116

4000K 1231 lm


900122116

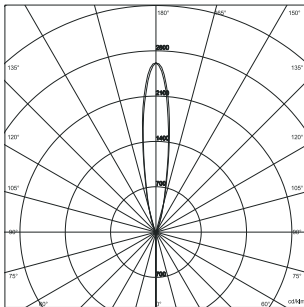


15°

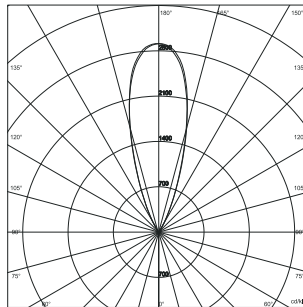


36°

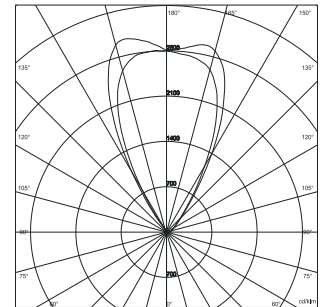


60°

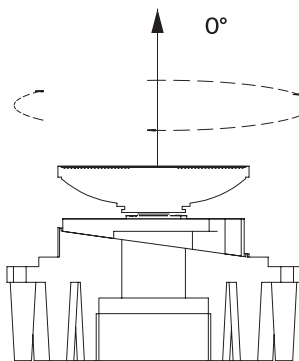


1

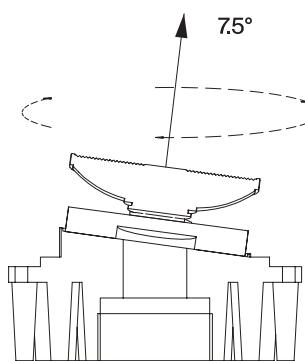

2

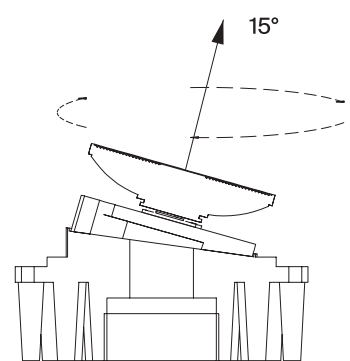

3

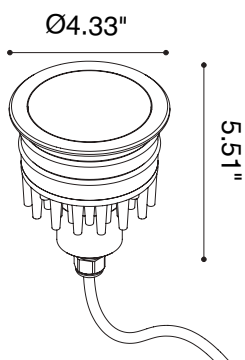

For Model ZERO ø4.33", by adjusting a rotating mechanical object the optical section can be oriented, by opening the luminaire a graduated base allows the tilting adjustment.







- For the installation of recessed ground fixture, a proper drainage must be provided, and the use installation box is mandatory.
- Do not install in hollow areas or water flooding/stagnating areas, water should flow out within 30min. the use of IP connecting tools is warmly suggested to avoid water ingress.
- We recommend the use of connecting tools that grant an IP degree equal or higher than the one declared for products

ACCESSORIES



RECESSED BOX Zero Ø1.77"

9001 | Dimensions: Ø1.57" x 4.45"



RECESSED BOX Zero Ø4.45"

9002 | Dimensions: Ø2.48" x 4.53"



RECESSED BOX Zero Ø3.35"

9003 | Dimensions: Ø3.15" x 6.38"



RECESSED BOX Zero Ø4.33"

9000 | Dimensions: Ø3.94" x 7.87"



3-4 WAY - 4 POLES TERMINAL BLOCK IP68

9005 | For ref 9003 & 9000 only