

ZEUS

Simply lines for a light designed bollard for ground or solid surface installation.

EN47100 die-cast aluminum made and extruded aluminum for pole, 3 sizes available (h. 4.53"; h. 12.40"; h. 28.15") Powder polyester coated on treated layer to prevent corrosion, available in five standard colors.

The chemical treatment of aluminum fixtures consists of Cataphoresis process followed by a 60/80micron layer of power polyester coating.

Tempered silkscreened transparent glass diffuser, mechanically fixed with silicon glue.

- Remote Power Supply 24VDC, 50-60Hz
- Power: (10W LED; 12.5 W Total)
- CCT: 2700K / 3000K / 4000K CRI≥80
- IP65
- IK06
- Integral inox fixing plate included.
- Anchor bolts (9042) for ground installation and connector IP (9005) to be separately ordered.



79 Trenton Avenue
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042




ZEUS


h 4.53" - h 12.40" - h 28.15"





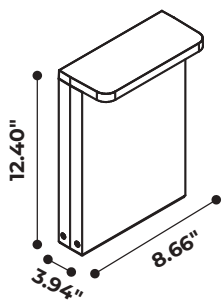


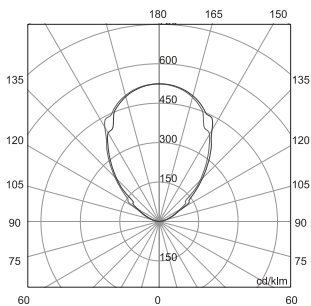
ZEUS	H 4.53"	10W LED	12.6W Total	24VDC		
		<i>white</i>	<i>sand</i>	<i>graphite</i>	<i>aluminum</i>	<i>corten</i>
2700K	645lm	901531042	901531043	901531044	901531045	901531048
3000K	672lm	901511042	901511043	901511044	901511045	901511048
4000K	705lm	901521042	901521043	901521044	901521045	901521048

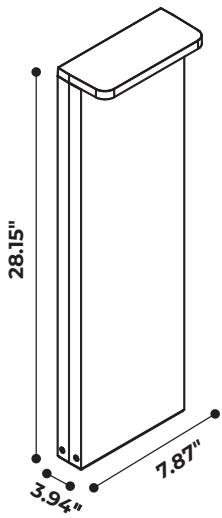

ZEUS	H 12.40"	10W LED	12.6W Total	24VDC		
		<i>white</i>	<i>sand</i>	<i>graphite</i>	<i>aluminum</i>	<i>corten</i>
2700K	645lm	901531052	901531053	901531054	901531055	901531058
3000K	672lm	901511052	901511053	901511054	901511055	901511058
4000K	705lm	901521052	901521053	901521054	901521055	901521058



ZEUS	H 28.15"	10W LED	12.6W Total	24VDC		
						
		<i>white</i>	<i>sand</i>	<i>graphite</i>	<i>aluminum</i>	<i>corten</i>
2700K	645 lm	901531062	901531063	901531064	901531065	901531068
3000K	672 lm	901511062	901511063	901511064	901511065	901511068
4000K	705 lm	901521062	901521063	901521064	901521065	901521068







ACCESSORIES



ANCHOR BOLTS

9042



3-4 WAY - 4 POLES TERMINAL BLOCK IP68

9005